

ENVIRONMENTAL IMPACT ASSESSMENT REPORT

Establishment of Shoe Mould Manufacturing Unit by M/S Xida Mould (Pvt) Ltd

LOCATED AT

**Manga Raiwind Road, Glamour Adda Police Check Post Road,
Opposite Dawood Mills, Tehsil Kot Radha Kishen, District Kasur**

PROJECT PROPONENT: MR. SONG BIN

**Prepared By
ZOOM CONSULTANCY & SERVICES,
LAHORE**

LIST OF ABBREVIATIONS

CO ₂	Carbon dioxide
dB(A)	A weighted decibel scale
EIA	Environmental Impact Assessment
EMMP	Environmental Management and Monitoring Plan
EMP	Environmental Management Plan
EPA	Environmental Protection Agency
EPD	Environmental Protection Department
EPO	Environmental Protection Ordinance
IEE	Initial Environmental Examination
Ltd.	Limited
LTI	Loss Time Injury
LWI	Loss Work Injury
m ³	Cubic meter
m ³ /h	Cubic meter per hour
MW	Megawatt
M/S	Messrs
NEQS	National Environmental Quality Standards
No.	Number
NOC	No Objection Certificate
NO _x	Oxides of Nitrogen
PEPC	Pakistan Environmental Protection Council
PEPA, 1997	Pakistan Environmental Protection Act, 1997

PEPA, 2012	Punjab Environmental Protection (Amendment) Act, 2012
PEPO	Pakistan Environmental Protection Ordinance
PKR	Pakistani Rupees
PM	Particulate Matter
PPEs	Personal Protective Equipment
Pvt.	Private
SMART	Self-Monitoring and Reporting
SOPs	Standard Operating Procedures
SO _x	Oxides of Sulfur
WAPDA	Water and Power Development Authority

EXECUTIVE SUMMARY

INTRODUCTION

Said project is the Establishment of Shoe Mould Manufacturing Unit by M/S Xida Mould (Pvt) Ltd at Chak 65, Manga Raiwind Road, Glamour Adda Police Check Post Road, Opposite Dawood Mills, Tehsil Kot Radha Kishen, District Kasur. Said Project will be installed at already constructed factory by Master Cuisine company. To full fil the compliance of section 12 of PEPA, Act 1997 (amended 2012 & 2017) M/s **Zoom Consultancy & Services** has been engaged to conduct Environmental Impact Assessment (EIA) of said Shoe Moulds manufacturing industry. The main objectives of this EIA are to establish baseline environmental conditions, identify potential impacts and suggest suitable mitigation measures for the execution of the said project. This study has been accomplished in line with the provisions – guidelines and directives of Punjab Environmental Protection Agency.

This executive summary presents an overview of the main findings of the EIA Report for the aforesaid project i-e Establishment of Shoe Mould Manufacturing Unit by M/S Xida Mould (Pvt) Ltd.

PROJECT OUTLINE (Details are given in Chapter 2)

Salient features of project:

Proponent Name:	Mr. Song Bin (Managing Director)
Project Title:	Establishment of Shoe Mould Manufacturing Unit by M/S Xida Mould (Pvt) Ltd.
Project Location:	Chak 65, Manga Raiwind Road, Glamour Adda Police Check Post Road, Opposite Dawood Mills, Tehsil Kot Radha Kishen, District Kasur
Name of organization preparing report	Zoom Consultancy & Services
Total Area	55 Kanals
Source of Water	Groundwater
Cost of Project	PKR 850 million approx.
Nearest Receptors	Dawood Mills (front side)
Source of Power:	WAPDA and Backup Generator
Wastewater:	Wastewater from the process will be domestic in nature and will be treated through septic tanks.

Solid Waste Management:	To handle the waste, waste management contract with EPA certified company will be done.
Tree Plantation	At designated areas
Raw Material	Aluminum Blocks Wood Printing Inks for designing
Finished product	Shoe Mould (50 pieces/month)
Components of Area	<ul style="list-style-type: none"> • Raw material storage area • Process Hall • Admin Offices • Finished Product Storage Area • Workers Colony

MAJOR IMPACTS AND RECOMMENDED MITIGATION MEASURES:

Beneficial/Positive Impacts:

- The establishment of the said project will contribute to enhancing Pakistan’s domestic productivity, and help diversify Pakistan’s economy
- Provision of employment and stimulation of local economy.
- Provision of high-quality Shoe Moulds
- Potential of improvement for social and cultural values of local people’s exchange of values and standards through positive social interactions. Positive changes in lifestyles will occur due to availability of income when the natives take up Company jobs.

Negative Impacts:

Impacts	Mitigation measures
Construction phase	
Dust emissions	Most of the dust generating activities during construction will last for a brief period, when excavation works will be executed. Thereafter, vehicular movement will generate most of the dusts. Dusts will be suppressed using water bowser to spray exposed land surfaces and particularly areas likely to be disturbed by trucks and other vehicles during the construction of the

	<p>factory premises. Vehicular speed limits of 20 km/h will be ensured in order to minimize dust generation. Further mitigation measures will be:</p> <ul style="list-style-type: none"> • Covering haulage vehicles transporting aggregate, soil and cement • Covering onsite stockpiles of aggregate, cement, soil, etc. • Providing workers with the necessary Personal Protective Equipment (PPE) e.g. dust masks and ensure that they are worn • Operating well maintained vehicles and equipment
Wastewater	<ul style="list-style-type: none"> • Portable toilets with septic tanks will be provided to workers during construction phase
Impacts of accidental spillages	<ul style="list-style-type: none"> • The integrity of storage facilities will be ensured • Drip pans will be made available where necessary
Safety	<ul style="list-style-type: none"> • Safety signage will be put in relevant places within the construction site • Reckless driving by construction workers will be prohibited and monitored. • Workers will be given PPEs such as; helmets, mask, ear-plugs/muffs, safety boots, safety goggles, safety jackets, harnesses etc. and its use was strictly enforced • Workers will be trained on regular basis regarding personal safety • Incidents will be reported directly to the concerned authority
Solid waste management	<ul style="list-style-type: none"> • Recycling or reuse of waste wherever possible. • Application of a good strategy to collect, remove and safely dispose of waste on daily basis to ensure a clean environment in the factory site • Integrated waste management system will be adopted for the proper management of the waste at site • At the end of the construction phase, left-over waste will be removed as per practices of area • All the idle machinery and equipment will be immediately removed from the site • Scrap and the debris will be removed from the site at the end of the construction stage after appropriate segregation of the material
Operation Phase	

<p>Air Emissions, Particulate emissions and stack emissions</p>	<ul style="list-style-type: none"> • Emissions from furnace will be controlled by equipping with cyclone, scrubber and room • Electrical Furnace will be used • Power Engines will be equipped with air emission control technology. • Monitoring of Ambient air parameters (Particulate matter, SO_x, NO_x) emissions should be carried out on regular basis to ensure compliance with the PEQS. • The inspection and the maintenance of the boiler and generator will be done on regular basis. • Plantation of indigenous trees within the premises and along the boundary.
<p>Noise Emissions</p>	<ul style="list-style-type: none"> • Effective noise suppression design and plan will be made for all noise producing equipment i.e. high noise generating machines will be kept in isolation from other machines to minimize the overall cumulative noise. • Noise barriers should be implanted • The repairing and the small source of noise will be removed if it will possible. • PPEs are provided to workers • Proper tree plantation has been done • Noise monitoring will be carried out periodically.
<p>Degradation of surface waters quality due to process water and sewage direct disposal</p>	<ul style="list-style-type: none"> • Domestic Type of wastewater will be generated only. • The process is dry in nature • Domestic wastewater will be treated through septic tanks • Wastewater will be disposed off in nearby drain.
<p>To minimize loss work injury/hazards/incidents/accidents</p>	<ul style="list-style-type: none"> • Proper training will be provided for the proper usage of machineries and personal protective equipment (PPE) will be provided. It will be ensured

	<p>that the individual who has received the correct training is operating a particular machine.</p> <ul style="list-style-type: none"> • Site supervisor or health and safety should be present on site • Risk Assessment will be done on daily basis • Emergency response plans will be remained active. • Monitoring cameras and sensors will be implanted at the work site • OSHA polices will be implemented on site • Regulation of the health and safety polices will be done on regular basis • Training of staff in the handling of lifting materials. • Timely maintenance and repair of electrical equipment will be conducted. • Implementation of work rotations, provision of regular work breaks. • At workplace, first aid facilities will be maintained at readily accessible places.
<p>To minimize disturbance of communities due to noise</p>	<ul style="list-style-type: none"> • All the machinery will be installed and operated in a closed hall and from operation of machinery noise will not be a problem for the residents in the area nearby. Further Administration of the unit will take the precautionary measures to avoid the noise emissions. There is no possibility of Noise pollution • A thick greenbelt will be developed all around the plant which will be acting as noise barrier. • All the workers will be provided with ear plugs. • All the transporters will be advised to carry out regular maintenance of their vehicles.
<p>Solid waste management</p>	<ul style="list-style-type: none"> • There will be separated bins for segregation of different type of waste • Proper waste collection system will be ensured. For this purpose, waste bins are placed inside the boundary. • The recyclable waste will be sent to waste contractors. • The site in charge will ensure the separation of waste at production line.

	<ul style="list-style-type: none"> • Proper person will be hired for the collection and removal of waste from the site. • Records of generated waste should be maintained. • All non-hazardous waste that can be recycled or reused will be handed over to the contractors. • Training will be provided to personnel for identification, segregation and management of waste. • All containers of waste will be labeled properly. • The proper waste management system will be applied. • Small bins and large containers will be provided on every waste producing site at defined place causing no risk to worker and machinery. • In-house audits of the waste management will be undertaken on regular basis.
Traffic	<ul style="list-style-type: none"> • Nighttime driving of project vehicles will be limited where possible. • Vehicles will remain confined to defined access. • The road will be labeled according to the rules and regulations. • Speed limits will be maintained. • Road signage relevant to the project traffic will be placed, where necessary. • Community complaint register and other means will be adopted for the community to complain about non-adherence of traffic to speed limits, safe driving and other safety related concerns. • All vehicle drivers will be trained in community safety aspects. Drivers will be trained in responsible and safe driving practices; safe speed limits for vehicles will be followed.

ENVIRONMENTAL MANAGEMENT & MONITORING PLANS:

During construction, ambient air quality for dust level in particular noise level (tests), solid waste management and soil contamination, and community and workers' safety (visual) need to be

monitored. During operation, stack emissions, noise level, air quality, wastewater quality and workers' safety will be monitored. Plan has been included in **Chapter-7** of this EIA Report.

CONCLUSION & RECOMMENDATION

It can be concluded that all the major and minor adverse environmental impacts from the construction/ Establishment of Shoe Mould Manufacturing Unit by M/S Xida Mould (Pvt) Ltd has been mitigated in environmental friendly manner and the Environmental Impact Assessment is being done in the light of guidelines recommended by Punjab EPA. Hence Environmental Approval may be accorded to the subject Shoe Moulds manufacturing industry for construction phase.

Recommendations:

Following Recommendations are suggested:

- Wastewater produced from process should be treated through Effluent Treatment Plant
- All the workers should be given with proper PPE's during operation phase
- All the concerns of stakeholders should be catered before construction
- EMP should be properly implemented
- The construction and installation should be completed in guidelines of accorded Environmental Approval.

LIST OF ANNEXURE

Following Documents are attached as annexure.

ANNEXURE I:	PROPONENT CNIC
ANNEXURE II:	PROPERTY DOCUMENTS
ANNEXURE III:	LAYOUT MAP
ANNEXURE IV:	GLOSSARY
ANNEXURE V:	ENVIRONMENTAL MONITORING REPORTS
ANNEXURE VI:	GOOGLE EARTH MAP

TABLE OF CONTENT

CHAPTER 1: INTRODUCTION	27
1.1 GENERAL.....	27
1.2 THE PROPONENT	27
1.3 THE PROJECT.....	27
1.3.1 Nature of Project	27
1.3.2 Size of Project.....	27
1.3.3 Location of Project.....	28
1.3.4 Total area.....	28
1.3.5 Cost of the Project.....	28
1.4 DETAILS OF CONSULTANTS.....	28
1.5 PURPOSE OF REPORT	28
1.6 Structure of Report.....	29
2 CHAPTER 2	31
2.1 General.....	31
2.2 Type and Category of Project.....	31
2.3 Objectives of Project	31
2.4 Alternatives.....	31
2.4.1 Site Alternatives	32
2.4.2 Project Alternative	32
2.4.3 Labor	32
2.4.4 Environmental alternatives.....	33
2.4.4.1 Wastewater Treatment.....	33
2.4.5 Economic Alternative.....	33
3 CHAPTER 3: DESCRIPTION OF PROJECT	34
3.1 Objectives of Project	34
3.2 Particulars of Project Site	34
3.3 Location and Layout of Project.....	34
3.3.1 Location of the Project.....	34

3.4	Nature of Area.....	35
3.5	Land Ownership	35
3.6	Government Approvals.....	35
3.7	Land Use on Site	35
3.8	Road Access	35
3.9	Vegetative Features on Site.....	36
3.10	Cost and Magnitude of Operation.....	36
3.11	Schedule of Implementation	36
3.12	Description of the project:.....	37
3.12.1	Products:.....	37
3.12.2	Manufacturing process:.....	37
22.1	Relocation and Rehabilitation Plan	40
22.2	List of Machinery	40
22.3	Amenities	41
22.3.1	Electricity Consumption.....	41
3.1.1.1	Ground Water Resource	41
22.3.2	Management Plans	41
22.3.3	Air Emissions.....	42
22.3.4	Wastewater Management and Disposal	42
22.3.5	Waste Management	42
22.3.6	Emergency Preparedness.....	42
22.3.7	Safety Trainings.....	43
22.3.8	Use of Drugs and Narcotics	43
22.3.9	Personal Protective Equipment	43
23	CHAPTER 4: DESCRIPTION OF THE ENVIRONMENT	44
23.1	General.....	44
23.2	Methodology	44
23.2.1	Data Collection	44
23.2.2	Social Survey	45
23.2.3	Sampling Design	45

23.2.4	Questionnaires.....	45
23.3	Data Editing and Analysis.....	45
23.3.1	Review of Legal and Administrative Framework.....	45
23.3.2	Baseline Conditions.....	46
23.4	Physical Resources.....	46
23.4.1	Geography and Geology.....	46
23.4.2	Topography.....	47
23.4.3	Hydrology.....	47
23.4.4	Climate.....	48
23.4.4.1	Temperature.....	48
23.4.4.2	Rainfall.....	51
23.4.4.3	Seismicity.....	51
23.5	Ecological Environment.....	53
23.5.1	Aquatic Flora and Fauna.....	53
23.5.2	Flora.....	53
23.5.3	Fauna.....	53
23.6	Environmental Monitoring.....	56
23.6.1	Sampling Sites.....	56
23.7	Socio-Economic Resources.....	56
23.7.1	Cultivated Crops.....	56
23.7.2	Socio-Economic Profile of Study Area.....	56
23.7.3	Nearby Residential Areas.....	56
23.8	Social and Public Amenities Available.....	56
23.8.1	Physical structures.....	57
23.8.2	Religious Structure.....	57
23.8.3	Protected Structures.....	57
23.8.4	Cultural Heritage and Community Structure.....	57
23.9	Quality of Life Values.....	57
23.9.1	Occupation of Respondents.....	57
23.9.2	Literacy Rate.....	58

23.9.3	Industries.....	59
23.9.4	Educational facilities.....	59
23.9.5	Health facilities.....	59
24	CHAPTER 5: STAKEHOLDER CONSULTATION.....	60
24.1	GENERAL.....	60
24.2	OBJECTIVES OF CONSULTATION.....	60
24.3	IDENTIFICATION OF STAKEHOLDERS	61
24.3.1	Direct.....	61
24.3.2	Indirect.....	61
24.4	PUBLIC DISCLOSURE	61
24.5	CONSULTATION PROCESS.....	62
24.5.1	Consultation Methodology.....	63
24.5.1.1	Consultation Material.....	63
24.5.1.2	Consultation Mechanism.....	63
24.5.2	Primary Stakeholders Consultation.....	63
24.5.2.1	STAKEHOLDER CONCERNS AND RECOMMENDATIONS	64
24.6	STAKEHOLDERS CONSULTED.....	65
24.6.1	Secondary Stakeholders Consultation	66
25	CHAPTER6: POTENTIAL ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES	68
25.1	GENERAL.....	68
25.2	IDENTIFICATION OF POTENTIAL IMPACTS	68
25.3	CLASSIFICATION OF IMPACTS.....	68
25.4	SCOPING CRITERIA FOR IMPACTS	69
25.5	METHODOLOGY FOR IMPACT ASSESSMENT.....	69
25.5.1	What is the problem?.....	71
25.5.2	When problem will occur and when it should be addressed?	71
25.5.3	Where problem should be addressed?	72
25.5.4	How the problem should be addressed?.....	72
25.5.5	Ways of Achieving Mitigation Measures:.....	72

25.5.5.1	Changing in Planning Design.....	72
25.5.5.2	Improved Management and Monitoring Practices.....	72
25.5.5.3	Compensation in Money Terms.....	72
25.5.5.4	Replacement/Relocation/Rehabilitation.....	72
25.6	Impact Summary	73
25.7	IMPACTS DUE TO PROJECT LOCATION	73
25.8	DESIGN PHASE.....	74
25.9	IMPACTS ASSOCIATED WITH CONSTRUCTION PHASE	74
25.10	IMPACTS ASSOCIATED WITH OPERATION PHASE	77
25.11	ENVIRONMENTAL IMPACTS.....	77
25.11.1	AIR EMISSIONS	77
25.11.2	NOISE.....	78
25.11.3	TRAFFIC.....	79
25.11.4	SOLID WASTE.....	80
25.11.5	WASTEWATER.....	81
25.11.6	ABNORMAL CONDITIONS.....	81
25.11.7	OCCUPATIONAL HEALTH AND SAFETY	81
25.12	SOCIOECONOMIC IMPACTS	82
25.12.1	EMPLOYMENT OPPORTUNITIES	83
25.13	POTENTIAL ENVIRONMENTAL ENHANCEMENT MEASURES.....	83
25.13.1	GREENBELT DEVELOPMENT.....	83
26	CHAPTER 7: ENVIRONMENTAL MANGEMENT AND MONITORING PLANS	84
26.1	GENERAL.....	84
26.2	OBJECTIVES OF ENVIRONMENTAL MANAGEMENT PLAN	84
26.3	MANAGEMENT APPROACH	85
26.4	COMPONENTS OF THE EMP	85
	THE EMP CONSISTS OF THE FOLLOWING:.....	85
26.5	ENVIRONMENT MANAGEMENT PLAN	85
26.6	ENVIRONMENTAL MONITORING PLAN.....	99
26.7	INSTITUTIONAL CAPACITY OF THE UNIT	101

26.7.1	Primary Responsibilities.....	101
26.7.2	Operation Management & Control.....	101
26.7.3	Supervision & Monitoring	101
26.7.4	Communications & Documentation.....	101
26.7.4.1	Meetings.....	101
26.7.4.2	Changes-Record Register	101
26.8	ENVIRONMENTAL TRAINING	101
26.9	EQUIPMENT MAINTENANCE DETAILS.....	102
26.10	ENVIRONMENTAL BUDGET	103
27	CHAPTER 8: CONCLUSION AND RECOMMENDATIONS	104
27.1	CONCLUSION.....	104
27.2	RECOMMENDATIONS.....	104

LIST OF Figures

Figure 3-1 Location Map of Project Site	35
Figure 3-2 Road Access	36
Figure 4-1 Location of Project.....	47
Figure 4-2 Yearly average temperature of District Kasur, Pakistan from 1958 to 2012	49
Figure 4-3 Average Annual Temperature of District Kasur (Source: Climate-data.org)	49
Figure 4-4 Average Annual Precipitation of Kasur (Source: hikersbay.com)	51
Figure 4-5 Siesmic Zones of Pakistan.....	52
Figure 4-7: Occupation of Respondents.....	58
Figure 4-8 Literacy Rate of Respondents	58

CHAPTER 1: INTRODUCTION

1.1 GENERAL

Said project is the Establishment of Shoe Mould Manufacturing Unit by M/S Xida Mould (Pvt) Ltd. The said unit will be installed at already constructed facility of master cuisine. To full fil the compliance of section 12 of PEPA, Act 1997 (amended 2012 & 2017) M/s Zoom Consultancy & Services has been engaged for conducting Environmental Impact Assessment (EIA) of said Shoe Moulds manufacturing industry The purpose of this study is to identify the environmental baseline i.e. physical, biological and socio-economic/cultural conditions and assess all possible impacts arising during the construction and operation phase of the project with the aim to find out appropriate measures for their mitigation, to either eliminate those impacts or to bring them to acceptable level and formulate Environmental Management Plan (EMP) for implementation of the project in environment-friendly manner.

The report provides relevant information, as required under the officially approved format, to facilitate the decision makers i.e. EPA Punjab for the issuance of Environmental Approval.

1.2 THE PROPONENT

Name	Mr. Song Bin
Address	Manga Raiwind Road, Glamour Adda Police Check Post Road, Opposite Dawood Mills, Tehsil Kot Radha Kishen, District Kasur

1.3 THE PROJECT

1.3.1 Nature of Project

The said project is the Establishment of Shoe Mould Manufacturing Unit by M/S Xida Mould (Pvt) Ltd. Its salient features have been described later in this Chapter, Chapter 3 and briefly in Executive Summary of this EIA Report.

1.3.2 Size of Project

The capacity of the unit will be 50 moulds/ month.

1.3.3 Location of Project

Said Project is located at Chak 65, Manga Raiwind Road, Glamour Adda Police Check Post Road, Opposite Dawood Mills, Tehsil Kot Radha Kishen, District Kasur.

1.3.4 Total area

Total area required for said project is approx. 55 Kanals

1.3.5 Cost of the Project

Cost of project has been estimated at Approx. PKR 850 million.

1.4 DETAILS OF CONSULTANTS

For the preparation of the Initial Environmental Examination report of the said project, the proponent has hired the services of the environmental consultants; **M/S Zoom Consultancy and Services**. Team comprising of environmental engineers, chemical engineers, environmental experts and environmentalists has worked on this report. Team comprising of environmental engineers, chemical engineers, environmental experts and environmentalists has worked on this report.

Environmental Compliance Studies

- Initial Environmental Examination
- Environmental Impact Assessment
- Socio-Environmental Impact Assessment
- Green House Gas Estimation
- Environmental Management Plan

1.5 PURPOSE OF REPORT

The development of any Project leads to positive and adverse changes in environmental and change in social settings of the Project Area. The intensity and level of change, however, depends upon the nature of the Project and the baseline environmental conditions of the area. The development and commencement of said project will cause minor to moderate adverse environmental and social impacts on the surrounding area. Thus, an environmental and social study is mandatory to establish the baseline conditions, evaluate the possible adverse impacts if any, and devise the mitigation measures.

Section 12 of Pakistan Environmental Protection Act, 1997 (PEPA, 1997) states *“No proponent of a project shall commence construction or operation unless he has filed with the Provincial Agency an Initial Environmental Examination (IEE) and, where the project is likely to cause an adverse environmental effect, an Environmental Impact Assessment (EIA), and has obtained approval from the Provincial Agency in respect thereof.”* Later on, Punjab Environmental Protection Agency (Review of IEE and EIA) Regulations, 2022 provided the guidelines for categorizing the Projects. The main objectives of this EIA study were:

- To determine and document the state of the environment of the project area to establish a baseline in order to assess the suitability of the said project in that area.
- To identify pre-construction, construction and operation activities and to assess their impacts on environment.
- Provide assistance to the proponent for planning, designing and implementing the project in a way that would strengthen environment, improve ecological resilience, eliminate or minimize the negative impact on the biophysical and socio-economic environment and maximizing the benefits to all parties in cost effective manner.
- To present Mitigation and Monitoring Plan to smoothly implement the suggested mitigation measures and supervise their efficiency and effectiveness.
- To provide opportunity to the public for understanding the project and its impacts on the community and their environment in the context of sustainable development.
- Prepare an EIA Report for submittal to the Environmental Protection Agency, Punjab for according Environmental Approval.

1.6 Structure of Report

This EIA reviews information on existing environmental attributes of the Study Area. Geological, hydrological and ecological features, air quality, noise, water quality, soils, social and economic aspects and cultural resources are included. The report predicts the probable impacts on the environment due to the said project. This EIA also proposes various environmental management measures. Details of all background environmental quality, environmental impact/pollutant generating activities, pollution sources, predicted environmental quality and related aspects have been provided in this report. The structure of the assessment report will be as follow;

- Description of the Project

- Alternatives
- Scoping & Screening
- Description of Environmental and Social Conditions
- Assessment of Environmental Impacts and Mitigation Measures
- Mitigation Measures for Identified Impacts
- Public Consultation
- Environmental Management and Monitoring Plan (EMMP)
- Recommendations and Conclusions

CHAPTER 2

SCREENING AND SCOPING

2.1 General

This section of the study concentrates on details of the project and its salient features; such as location, site layout, objectives, selection of alternatives, cost and magnitude of operation and various phases. Inputs and discharges relevant to different phases of the project, such as electricity & materials, etc. have also been examined as a response to possible environmental concerns.

2.2 Type and Category of Project

As per Review of Initial Environmental Examination (IEE) and Environmental Impact Assessment (EIA) Regulations, 2000 the Project of Establishment of Project fall in “**C (2)**” **Category of Schedule II i-e Mining and Processing of major non-ferrous metals.**

2.3 Objectives of Project

Following are the main objectives of said Shoe Moulds manufacturing industry:

1. To produce quality Shoe Moulds
2. To provide employment to the people
3. To change the social life style of the area
4. To upgrade the socio-economic condition of the area
5. Minimization of environmental impacts by adopting best management practices.
6. To support the local economy through significant investment and upgrades to infrastructure.

2.4 Alternatives

The analysis of the alternatives is a part of the EIA process to select the best among all possible project options. The alternatives of a project are defined as the options that can help to meet the objectives of a project by different means including alternative project sites, Environmental alternative etc. The key criteria when identifying alternatives is that they should be feasible and reasonable.

Selection of preferred alternative is based on scores of factors including cost, schedule of delivery, environmental and social impact and the cost for their redressal. The drivers that affect potential alternative options and scenarios include: availability of project sites, current technologies; design

changes that need to be introduced, operational situation, capital & recurrent costs, environmental & social issues, their potential impacts, and costs of mitigation.

The details of the site alternatives and project alternatives are discussed below

2.4.1 Site Alternatives

No other site alternative was available to be considered as feasible option for the installation of the plant as proposed project site is owned by the M/S Xida Mould (Pvt) Ltd. The proposed site was selected because of the following reasons;

- The selected site is located in the proximity of other relevant industries
- The site is well connected to the other parts of the country through Manga – Raiwind Road, Kasur.
- No human settlements displacement or relocation is associated with the project development and operation
- Operation of the aforesaid unit in the respective zone will provide job opportunities to local people and will improve their socio-economic status of the study area.
- The project shall produce quality Shoe Moulds to meet the demand of community.

No important religious, archaeological, recreational site or ecologically/declared protected area and human settlement exists within close proximity of the selected site. In view of these facts, it can be concluded that the selected site is best suited for the project, and will not pose any adverse impact or threat on any component of the environment.

2.4.2 Project Alternative

2.4.3 Labor

Cheap labor has always been the backbone of the economy of Pakistan. Cheap and ample supply of labor strengthens the industrial and agriculture sector of the country. There are approximately 7 upstream and 6,000 downstream production units in the country which provide employment directly and indirectly to ~ 600,000 people. Of the downstream units, only 700 belong to the organized sector while the remaining 5,300 units operate in the unorganized sector. Also, this project will emphasize to hire local labors as many as possible increasing the occupational status of the area.

Considering the above-mentioned factors, no project alternative can be envisaged.

2.4.4 Environmental alternatives

2.4.4.1 Wastewater Treatment

Wastewater, or sewage, originates from human and home wastewaters, industrial wastes, animal wastes, rain runoff, and groundwater infiltration. Generally, wastewater is the flow of used water from a neighborhood. The wastewater consists of 99.9% water by weight, where the remaining 0.1% is suspended or dissolved material. This solid material is a mixture of excrements, detergents, food leftovers, grease, oils, salts, plastics, heavy metals, sands, and grits. Types of wastewaters include: municipal wastewater, industrial wastewaters, mixtures of industrial/domestic wastewaters, and agricultural wastewaters. Typical agricultural industries include: dairy processing industries, meat processing factories, juice and beverage industries, slaughterhouses, vegetable processing facilities, rendering plants, and drainage water of irrigation systems.

Constructed wetlands are used for wastewater treatment or for greywater treatment. They can be used after a septic tank for primary treatment (or other types of systems) in order to separate the solids from the liquid effluent. Some constructed wetland designs however do not use upfront primary treatment. Disadvantages of constructed wetlands include high land area requirements (depending on the design, they may require a relatively large land area compared to a conventional facility), the need for a preliminary treatment before the wastewaters treated by the system (normally they do not used to treat raw wastewaters).

2.4.5 Economic Alternative

It is cleared that if such huge investment is being done, it will impact the resources as well. If it is considered that as per the capacity of the unit, the electricity is being supplied from WAPDA, it will impact the national supply. To deal with this issue Xida Mould (Pvt) Ltd has planned to install solar system. As well as energy efficient machineries will be installed.

CHAPTER 3: DESCRIPTION OF PROJECT

This section of the study concentrates on details of the project and its salient features; such as its location, objective, site layout, cost and magnitude of operation at various phases and process employed for the subject process.

3.1 Objectives of Project

The main objective of this project is the Establishment of Shoe Mould Manufacturing Unit by M/S Xida Mould (Pvt) Ltd for providing the best quality Shoe Moulds to public with sustainable measures.

3.2 Particulars of Project Site

Details of location of project are provided in table below:

Table 1: Particulars of Project Site

Particulars	Details
Latitude	31°15'0.70"N
Longitude	74° 9'32.40"E
Location	Chak 65, Manga Raiwind Road, Glamour Adda Police Check Post Road, Opposite Dawood Mills, Tehsil Kot Radha Kishen, District Kasur
Tehsil	Kot Radha Kishan
District	Kasur
Nature of area	Industrial
Road connectivity	Manga Raiwind Road

3.3 Location and Layout of Project

3.3.1 Location of the Project

Project site is located at Chak 65, Manga Raiwind Road, Glamour Adda Police Check Post Road, Opposite Dawood Mills, Tehsil Kot Radha Kishen, District Kasur. Google map is given below:



Figure 3-1 Location Map of Project Site

3.4 Nature of Area

Said area is industrial in nature.

3.5 Land Ownership

The land is owned by Xida Mould (Pvt) Ltd. Property documents have been attached as **Annexure II**.

3.6 Government Approvals

Management has applied for the approvals from different concerned departments. Once the NOCs will obtain from different department, will be provided to EPA.

3.7 Land Use on Site

The land use on the site will be industrial in nature. There is no settlement, grassland or preserved area in the proximity of the project area that could be damaged or dismantled.

3.8 Road Access

The said Project area has road accessibility as it is accessible through Manga Raiwind Road at a distance of 0.9 km.

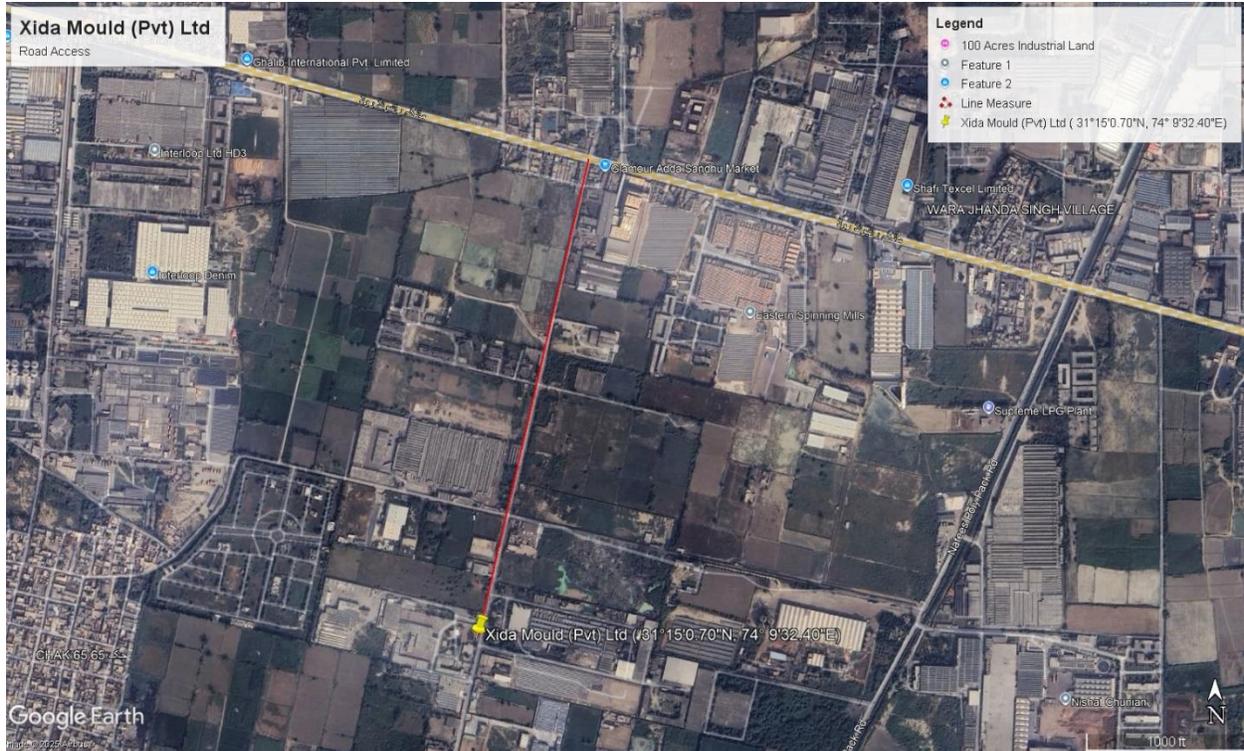


Figure 3-2 Road Access

3.9 Vegetative Features on Site

The area around the project area is industrial. There found no vegetative features nearby the project site.

3.10 Cost and Magnitude of Operation

Cost includes land cost, Building & Infrastructure cost, machinery cost, land scaping cost. Total cost of the project is PKR 850 Million (Approx.).

3.11 Schedule of Implementation

The schedule of implementation for the commencement of the civil work involved for the installation construction and operational maintenance is approximately 12 months and the detail timeline of the construction period is given in Table below:

Table 2: Timeline for Project Development

Sr. #	Activities	3 Months			3 Months			3 Months			3 Months		
		4W	4W	4W	4W	4W	4W	4W	4W	4W	4W	4W	

1	Detailed Designing	■	■										
2	Mobilization of Contractors			■									
3	Lean Development Period				■	■	■						
4	Peak installation Period							■	■	■	■	■	
5	Commissioning												*
W=48 Weeks													

3.12 Description of the project:

Project description is given in details in the preceding. Additional information is provided as under:

3.12.1 Products:

Xida Mould (Pvt) Ltd l to manufacturer of quality Shoe Moulds. Capacity of the project will be 50 mould/month.

3.12.2 Manufacturing process:

Major steps of manufacturing process are described as under:

3.13 Project brief and requirements gathering

The project team will define the shoe type, size range, tolerance limits, material specifications, production volumes, and functional requirements for the mould.

Conceptual design and reference collection

Designers will collect reference samples, sketches, last shapes, and customer inputs and will decide on parting lines, undercuts, and venting strategies for the mould.

3D modelling (CAD) of the shoe component and mould interfaces

Engineers will create detailed 3D CAD models of the shoe sole/upper component and the mould interfaces, including alignment features, draft angles, runner layouts (if required), and mounting faces.

Design validation and virtual simulation

The CAD models will undergo virtual checks and simulations (fit check, draft checks, interference detection, and where applicable flow simulation) and designers will iterate the model until it meets functional and manufacturability criteria.

Preparation for rapid prototyping and pattern export

The finalized 3D model will be exported in appropriate formats (STL/OBJ/STEP) and orientation, with support structures and slicing parameters determined for the 3D printing step.

3D printing of prototypes for fit and form testing

The prototype parts and/or a full-scale mould pattern will be produced by additive manufacturing (FDM/SLA/SLS as chosen) and engineers will inspect the printed parts for dimensional accuracy and surface finish.

Physical testing and design iteration using printed prototypes

The printed prototypes will be fitted to lasts or sample assemblies, functional tests will be performed (comfort, flex, adhesion as appropriate), and the CAD design will be revised based on test feedback.

Conversion of approved prototype into wooden pattern design

Once the prototype is approved, the team will convert the final 3D model into a pattern layout for a wooden master, adding any required machining allowances, fillets, and datum features for accurate mounting.

Fabrication of the wooden master mould

Skilled carpenters/CNC operators will produce the wooden master by CNC routing or hand finishing from hardwood or laminated blocks; the wooden master will be planed, carved, and surface-finished to the required geometry and tolerances.

Inspection and finishing of the wooden mould

The wooden master will be inspected with measuring tools and 3D scanning; finishing operations (sanding, sealing, lacquer or hard coating) will be applied to reach the desired surface quality and dimensional precision.

Pattern preparation for sand casting (or investment for aluminum)

The wooden master will be used to create the casting pattern: sprues, risers, parting lines, and gating channels will be incorporated and a pattern board or matchplate will be prepared to support the sand mold process.

Sand moulding and core making for aluminum casting

Foundry technicians will prepare molding sand with the specified binder, assemble cope and drag using the wooden pattern, place cores if needed, and compact the sand to form accurate mould cavities for the aluminum pour.

Aluminum melting and pouring

Metallurgists will melt the specified aluminum alloy to the required temperature, perform degassing and fluxing as necessary, and will pour the molten aluminum into the prepared sand mould under controlled conditions.

Cooling, shakeout, and initial fettling

After solidification, the casting will be allowed to cool to safe temperatures; the casting will be removed from the sand mould (shakeout), and initial fettling (removal of sprues, runners, and excess sand) will be performed.

Heat treatment and stress relief (if required)

The aluminum castings will undergo any required heat treatment or stress-relief cycles to achieve the specified mechanical properties and dimensional stability.

Machining and final dimensional finishing of the aluminum mould

The cast aluminium mould will be CNC-machined and surface-finished to final tolerances: critical faces, mounting holes, alignment pins, and any hydraulic or cooling channels will be machined and rechecked.

Surface treatment and polishing

The aluminium mould cavities and external faces will receive surface treatments—polishing, anodising, or coating as required—to achieve the final surface finish and wear resistance required for production.

Assembly of mould components and functional trial

All mould halves, inserts, ejection elements, and mounting plates will be assembled and aligned; a series of trial runs will be performed (tool tryout) to validate part release, cycle time, flashing, and dimensional conformity.

Quality control and final adjustments

Produced samples from the aluminium mould will be dimensionally inspected and tested against specifications; any minor adjustments or trimming of the mould will be carried out and revalidated.

Documentation, maintenance planning and production handover

The engineering team will compile final drawings, maintenance procedures, spare-parts lists, and a mould care schedule and will hand the mould over to production with training for operators and maintenance staff.

22.1 Relocation and Rehabilitation Plan

There exists no human settlement within premises of the selected project site to be displaced as a result of the proposed project. Moreover, no structure of any significance stands at the site is proposed to be relocated. The project area is owned by the proponent. So, no restoration and rehabilitation are required.

22.2 List of Machinery

List of Machinery is as follows:

1. CAD Workstations with Design Software (AutoCAD, SolidWorks, or Rhino)
2. 3D Scanner for Reverse Engineering
3. 3D Printer (FDM/SLA/SLS type) for Prototype Development
4. CNC Wood Router Machine for Wooden Master Pattern
5. Band Saw Machine for Wood Cutting
6. Wood Lathe Machine
7. Sanding and Finishing Machine for Wooden Patterns
8. Dust Extraction and Filtration Unit
9. Pattern Coating and Sealing Booth
10. Sand Mixer for Mould Preparation
11. Moulding Boxes (Cope and Drag Sets)

12. Vibrating Table for Sand Compaction
13. Core Making Equipment (Core Box and Oven)
14. Aluminum Melting Furnace (Crucible or Induction Type)
15. Degassing and Fluxing Unit for Molten Aluminum
16. Casting Ladles and Pouring Tools
17. Cooling Area with Ventilated Platforms
18. Shakeout Machine for Sand Removal
19. Fettling and Grinding Machines
20. Shot Blasting Machine for Surface Cleaning
21. CNC Milling Machine for Aluminum Mould Finishing
22. Vertical Machining Center (VMC) for Precision Machining
23. Drilling and Tapping Machines
24. Surface Grinding Machine
25. Polishing and Buffing Machines

Electrical furnace for melting of scrap aluminum will also be installed in case raw material is obtained from local market scrap however majority of raw material will be procured in the form of purest aluminum blocks.

22.3 Amenities

The following social amenities are present at site and the management of the waste (construction waste, solid waste and effluents) is explained in sub-sections below:

22.3.1 Electricity Consumption

WAPDA and backup generator,.

3.1.1. Ground Water Resource

During constructional and operational phase ground water will be consumed. The water will be pumped from ground from the depth of 250ft.

22.3.2 Management Plans

Following management plans will be employed to reduce the impact of the proposed activity:

22.3.3 Air Emissions

Air emissions will be generated while continuous operation of generator may deteriorate the quality of air in the open area. No other emissions will be generated from process related activities.

To deal with the pollution generated from these activities, regular monitoring and testing of generators will be carried out to ensure compliance. The workers dealing with the process activities will be provided with masks, safety shoes and all other necessary PPEs. To reduce the public nuisance native trees will be planted on the boundary to reduce the nuisance and to reclaim the disturbed soil effectively.

22.3.4 Wastewater Management and Disposal

In the proposed project wastewater will not be produced as the project nature is dry in nature. Domestic wastewater after treating through septic tanks will be disposed off in nearby drain.

It is proposed that tree plantation will be carried out around the premises of project area. The generated wastewater will be consumed for on-site horticultural activities.

22.3.5 Waste Management

The solid waste will be generated during the cooking in the worker's mess and during processing. The solid waste which will produce during process activities which will be sold out to EPA certified contractor. Regular training will be given to the workers dealing with the waste management it will include identification, segregation and management of waste. Other waste producing from the admin block, canteen, warehouse or from skybridges will goes to the municipal waste committee

22.3.6 Emergency Preparedness

Emergency response preparedness committee will be formulated consisted of heads of all departments and nominated members. Project Manager will be the head of the team who will chair the Committee. In the case of emergency, he will immediately inform the concerned authorities. HSE Manager will be responsible for on-site HSE management.

First aid facilities will be available at facility which will include; blankets, hot water bottles, sterilized dressing, snake bite kit, cotton and iodine (2% alcohol).

22.3.7 Safety Trainings

Skilled, semi-skilled and un-skilled staff will be provided with proper training about the work and safety practices that need to adopt during the process activities.

22.3.8 Use of Drugs and Narcotics

Drugs and narcotics are strictly prohibited during working hours in working area. Smoking will be only allowed during rest timings at properly isolated places.

22.3.9 Personal Protective Equipment

Following Personal Protective Equipment (PPEs) will be provided to the workers:

- Safety Helmet
- Safety Shoes
- Dust Mask
- Safety Gloves
- Safety goggles
- Ear plugs/ muffles

CHAPTER 4: DESCRIPTION OF THE ENVIRONMENT

23.1 General

An environmental baseline study is intended to establish a database against which potential project impacts can be predicted and managed later. The EIA of the proposed Project covers a comprehensive description of the project area, including environmental attributes which are expected to be affected by the project, as well as, those which are not expected to be directly affected by the construction and operation of the project. The existing environmental conditions around the proposed project have been considered with respect to physical, biological and socio-economic aspects. Site visits were conducted to survey the field area and to collect environmental data on physical, biological and socioeconomic parameters. Further, consultations were held with the general public and stakeholders of the project area in order to seek the public opinion on the implementation of the proposed project

23.2 Methodology

The methodology employed to collect the baseline data and information regarding the social structure and various related parameters as discussed in sub-sections below:

23.2.1 Data Collection

The primary data was collected by visiting the project area and its communities in its nearby vicinity. The secondary data regarding physical parameters (topography, geology, seismology, and climate) was obtained by visiting relevant various government departments and their official websites. The biological parameters such as flora and fauna were studied by preparing a floristic list based on visual observation and fauna was studied by using opportunistic approach. The species were recorded with reference to their existence in the project area. Information on wildlife fauna species (mammals, amphibians, reptiles, birds, etc.) in the assessment area was compiled based on opportunistic observation, gathering the existing information and consultation with local experts, community members and government and Non-Government Organizations (NGOs). The socioeconomic aspects were studied and analyzed by studying detailed village profile and by conducting household surveys.

23.2.2 Social Survey

The purpose of social survey was to record the present condition of the people living in the project area and to assess the expected project impacts on their life, subsistence systems and socio-cultural conditions. Prior to conducting the field surveys, the following steps were taken:

- Clear boundaries of the project area were identified
- Decided the sampling procedure in order to draw a representative sample size of the target population and households
- Developed the tools for data collection i.e. questionnaires to assess the socio-economic status of the area

23.2.3 Sampling Design

Social baseline data of the persons residing in the study area has been estimated and collected through random sampling by using pre-developed questionnaires.

23.2.4 Questionnaires

In order to test the validity and reliability of the proposed questionnaires, they were reviewed to assess whether questions needed to be clarified, changed or re-sequenced and then a final editing of questionnaires was conducted prior to their application in the project area.

23.3 Data Editing and Analysis

The filled questionnaires and recorded information were compiled by the same field investigators who were involved in the data collection. This was done immediately after completing the field investigations. Data sets were processed. Analysis of the data and preparation of conclusions in the minimum possible time was done using statistical techniques of data analysis.

23.3.1 Review of Legal and Administrative Framework

The objective of reviewing legal and administrative framework is to obtain information on all legislation pertaining project development. The Socio-Environment Team of Zoom Consultancy & Services reviewed the environmental policies, national, international and provincial laws and guidelines relevant to the development of project which helped in systematic identification of impacts.

23.3.2 Baseline Conditions

Baseline conditions refer to the existing physical, environmental and socio-economic status of the project area. On the basis of baseline information, the project interventions are assessed and mitigation measures are proposed. The baseline information also helps to indicate the specific issues to be monitored during construction and operational phases. The baseline data (physical, biological and socio-economic parameters) related to the project area is described below. Information provided is based on primary and secondary data collected by site visits, desk studies and consultation with locals respectively. This section gives the overview of the topology, geology, seismology and meteorological conditions of whole city whereas, it gives detailed information about the surface water, ground water and air quality of the project area. The detail of each parameter is discussed in sub-sections below:

23.4 Physical Resources

The physical resources consist of existing land form and land use at the project site including geology, hydrology, meteorology and climatology. The pre-project condition (i.e., baseline) of these components of the physical environment is described in detail. To identify the potential impacts on the physical, biological and socio-economic environment that is likely to arise from the project activities.

23.4.1 Geography and Geology

Kasur district is located in the Lahore Division of the Punjab Province, Pakistan Kasur town is situated, on the border of India about 30 miles (50 km) south of Lahore. The district lies from 30° - 40' to 31° - 20' north latitudes and 73° - 38' to 74° - 41' east longitudes.

The surrounding area consists of a flat alluvial plain bordered by the Ravi River to the northwest and the Sutlej River to the southeast. Five canals, used for irrigation, flow through the district. Agriculture is the principal occupation; wheat, rice, sugarcane, cotton, fruits, and vegetables are grown in the region. A forestry plantation was started at Chhanga Manga in 1864 and now produces silk, honey and beeswax, and turmeric, as well as seasoned timber. Pop. (1998) 245,321.

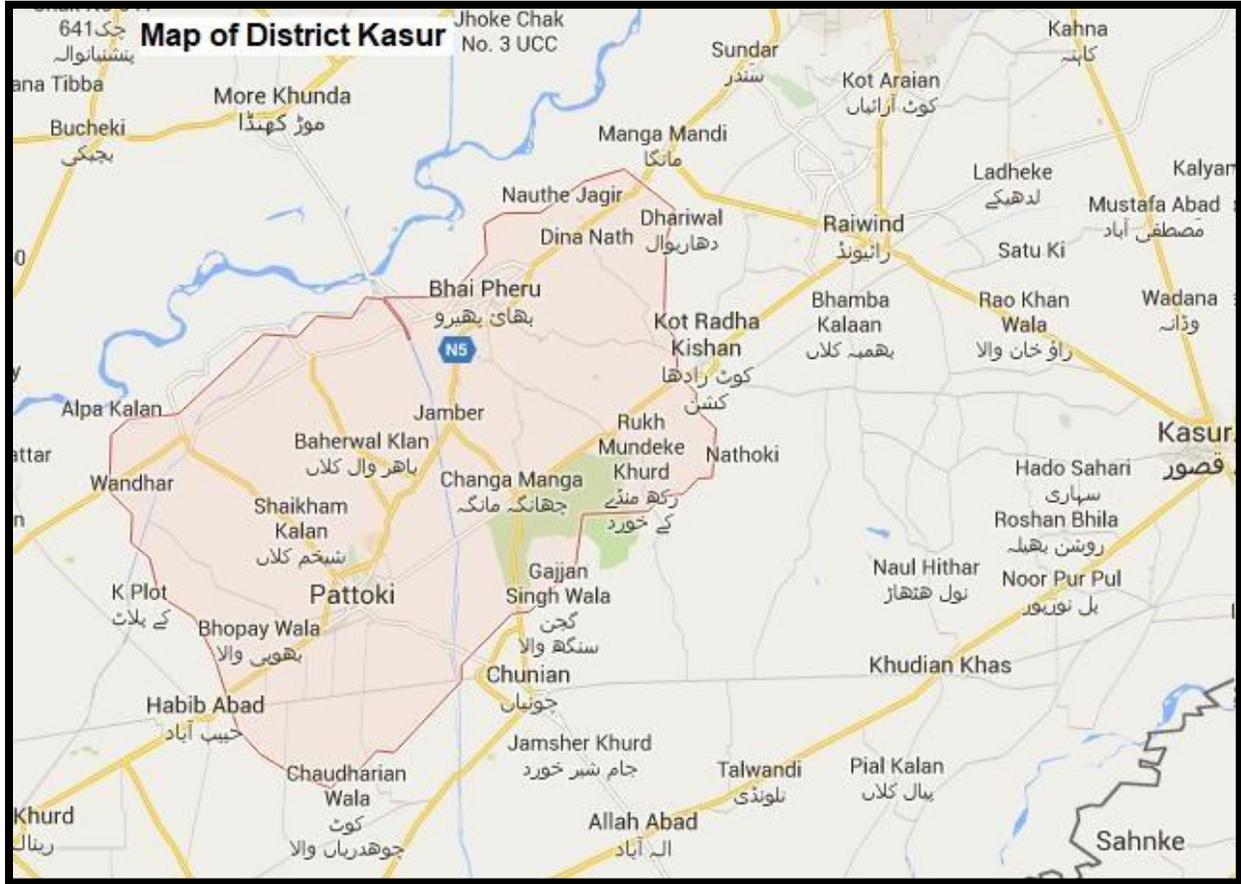


Figure 23-1 Location of Project

23.4.2 Topography

Kasur District lies between the river Satluj which flows along its boundaries with India and river Ravi which flows its boundary with Nankana Sahib District. The districts may be divided into two parts, a low lying or riverine area along the two bordering rivers and upland, away from the rivers. The riverine area is generally inundating during monsoon season. The water level in this area is higher than in the upland. The soil is sandy. The upland is flat plains sloping from north-west to south-west. The general height of the area is from 150 to 200 meters above the sea level.

23.4.3 Hydrology

Groundwater from depth of 200-250 ft can be used for drinking and other purpose. Groundwater is the major source of water in the study area, which is extracted with the help of pumps and

motors. The groundwater extracted is used to fulfill various domestic, irrigation and industrial needs. Ground water quality report of area is annexed.

23.4.4 Climate

23.4.4.1 *Temperature*

The District Kasur has extreme climate conditions and summer season starts from April and continues till October. During the summer season, temperature ranges from 30 °C to 48 °C. The winter season starts from November and continues till March. December and January are the coldest months with a mean minimum temperature of about 3-5 °C. The dust storms occur occasionally during the hot season, June, July and August.

Climate of District Kasur is very hot and dry in summer and cool in winter. At an average temperature of 33.5 °C | 92.4 °F, June is the hottest month of the year. The lowest average temperatures in the year occur in January, when it is around 12.3 °C | 54.1 °F.

Average temperature in Kasur over the years. Average Weather in Kasur, Pakistan. Climatological information about changes of temperature over the years in Kasur.

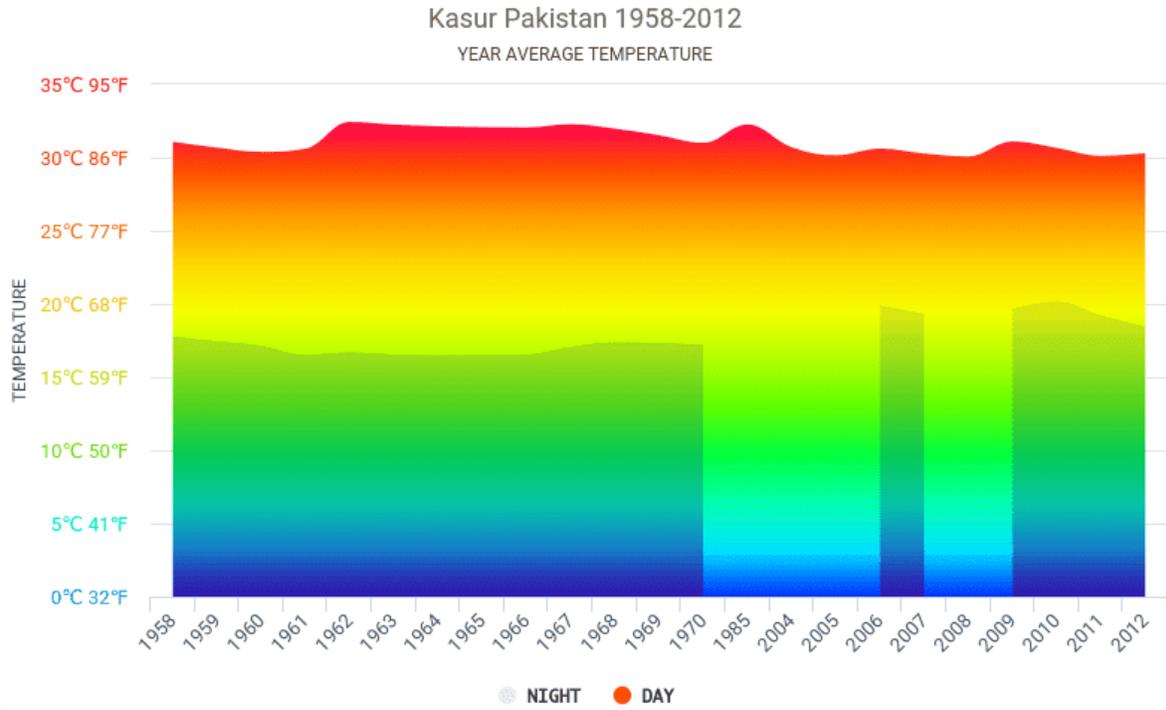


Figure 23-2 Yearly average temperature of District Kasur, Pakistan from 1958 to 2012

(Source: hikersbay.com)

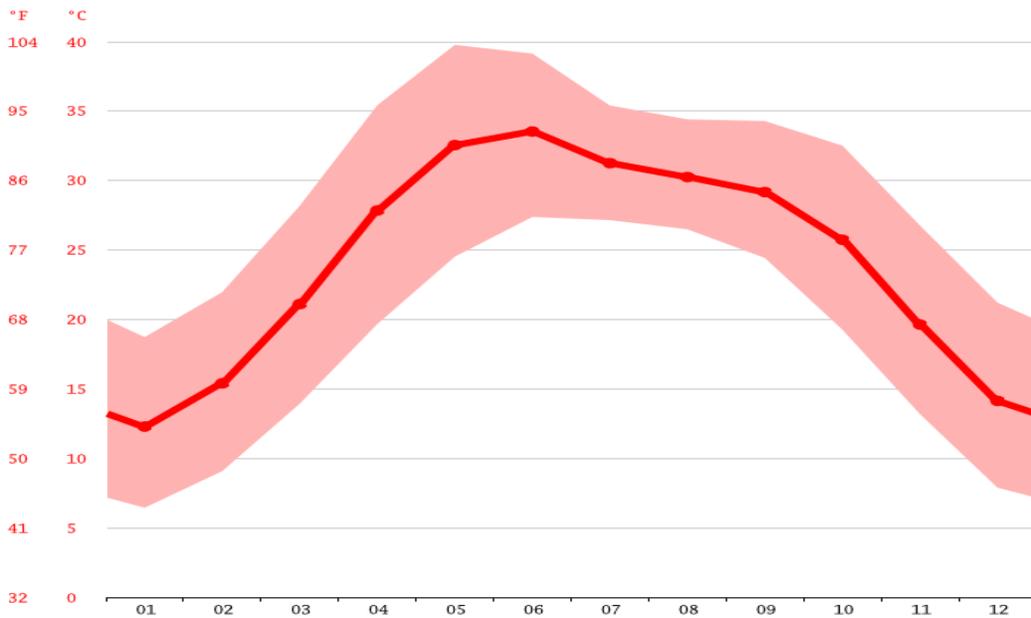


Figure 23-3 Average Annual Temperature of District Kasur (Source: Climate-data.org)

Table 3: District Kasur Weather Averages by Month

	January	February	March	April	May	June	July	August	September	October	November	December
Avg. Temperature °C (°F)	12.3 °C (54.1) °F	15.4 °C (59.7) °F	21.1 °C (70) °F	27.9 °C (82.1) °F	32.6 °C (90.6) °F	33.5 °C (92.4) °F	31.3 °C (88.3) °F	30.3 °C (86.5) °F	29.2 °C (84.5) °F	25.7 °C (78.3) °F	19.6 °C (67.3) °F	14.1 °C (57.5) °F
Min. Temperature °C (°F)	6.4 °C (43.6) °F	9.1 °C (48.3) °F	13.9 °C (57.1) °F	19.7 °C (67.4) °F	24.5 °C (76.2) °F	27.4 °C (81.3) °F	27.2 °C (80.9) °F	26.5 °C (79.7) °F	24.4 °C (76) °F	19.3 °C (66.7) °F	13.2 °C (55.7) °F	7.9 °C (46.2) °F
Max. Temperature °C (°F)	18.7 °C (65.7) °F	22 °C (71.5) °F	28.2 °C (82.7) °F	35.4 °C (95.8) °F	39.8 °C (103.6) °F	39.2 °C (102.5) °F	35.4 °C (95.7) °F	34.4 °C (93.9) °F	34.3 °C (93.7) °F	32.5 °C (90.5) °F	26.8 °C (80.2) °F	21.2 °C (70.2) °F
Precipitation / Rainfall mm (in)	25 (1)	37 (1.5)	28 (1.1)	22 (0.9)	21 (0.8)	61 (2.4)	151 (5.9)	131 (5.2)	67 (2.6)	13 (0.5)	6 (0.2)	11 (0.4)
Humidity(%)	70%	64%	53%	33%	30%	43%	67%	72%	64%	52%	56%	64%
Rainy days (d)	3	4	3	3	5	7	13	12	7	2	1	1

23.4.4.2 Rainfall

District Kasur is 150 to 200 meters above sea level. The climate here is considered to be a local steppe climate. In Kasur, there is little rainfall throughout the year. Months with the largest precipitation are August, July, September with 293 mm precipitation. Most precipitation occurs in August with an average precipitation 120 mm. The annual amount of precipitation in Kasur is 432 mm. The average annual temperature is 31°C in Kasur. The warmest month of the year is June, with an average temperature: 37°C. Usually January is the coldest month in Kasur, with average temperature 22°C. The difference between the hottest month: June and the coldest month: January is: 15°C. The difference between the highest precipitation (August) and the lowest precipitation (November) is 114mm.

Precipitation is the lowest in November, with an average of 6 mm | 0.2 inch. The greatest amount of precipitation occurs in July, with an average of 151 mm | 5.9 inch.

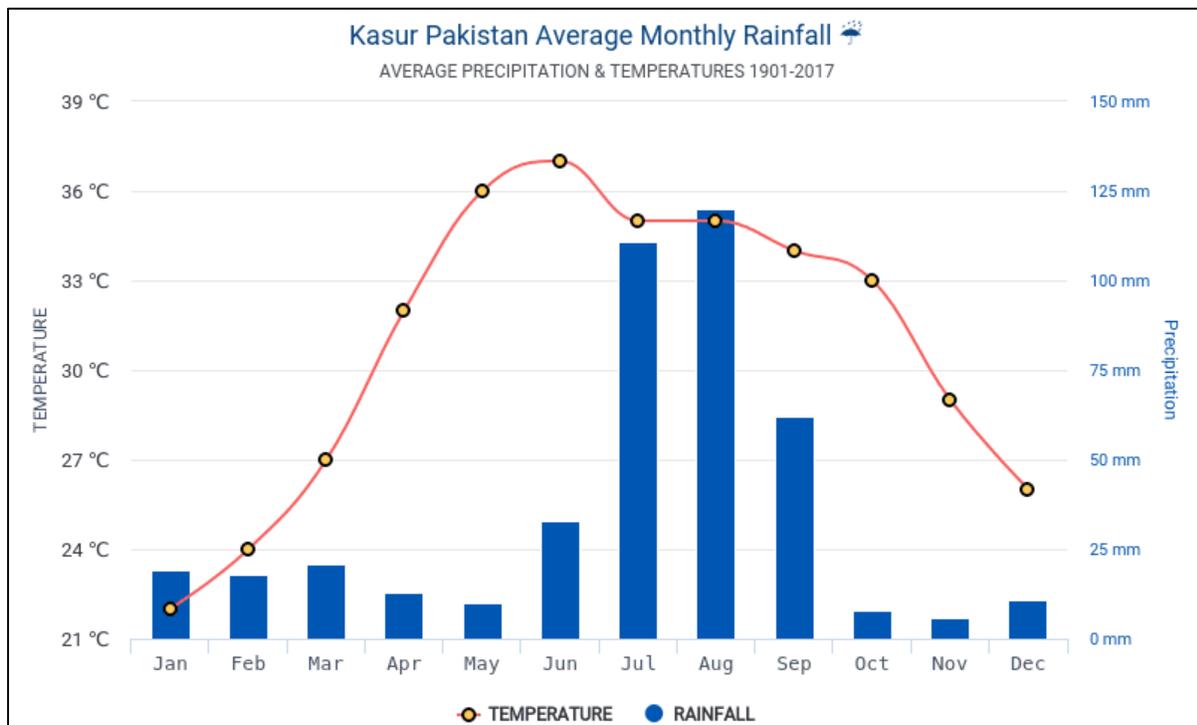


Figure 23-4 Average Annual Precipitation of Kasur (Source: hikersbay.com)

23.4.4.3 Seismicity

According to Seismic Zoning of Pakistan, the project area lies in Zone 2A and represents minor to moderate damage due to earthquakes.

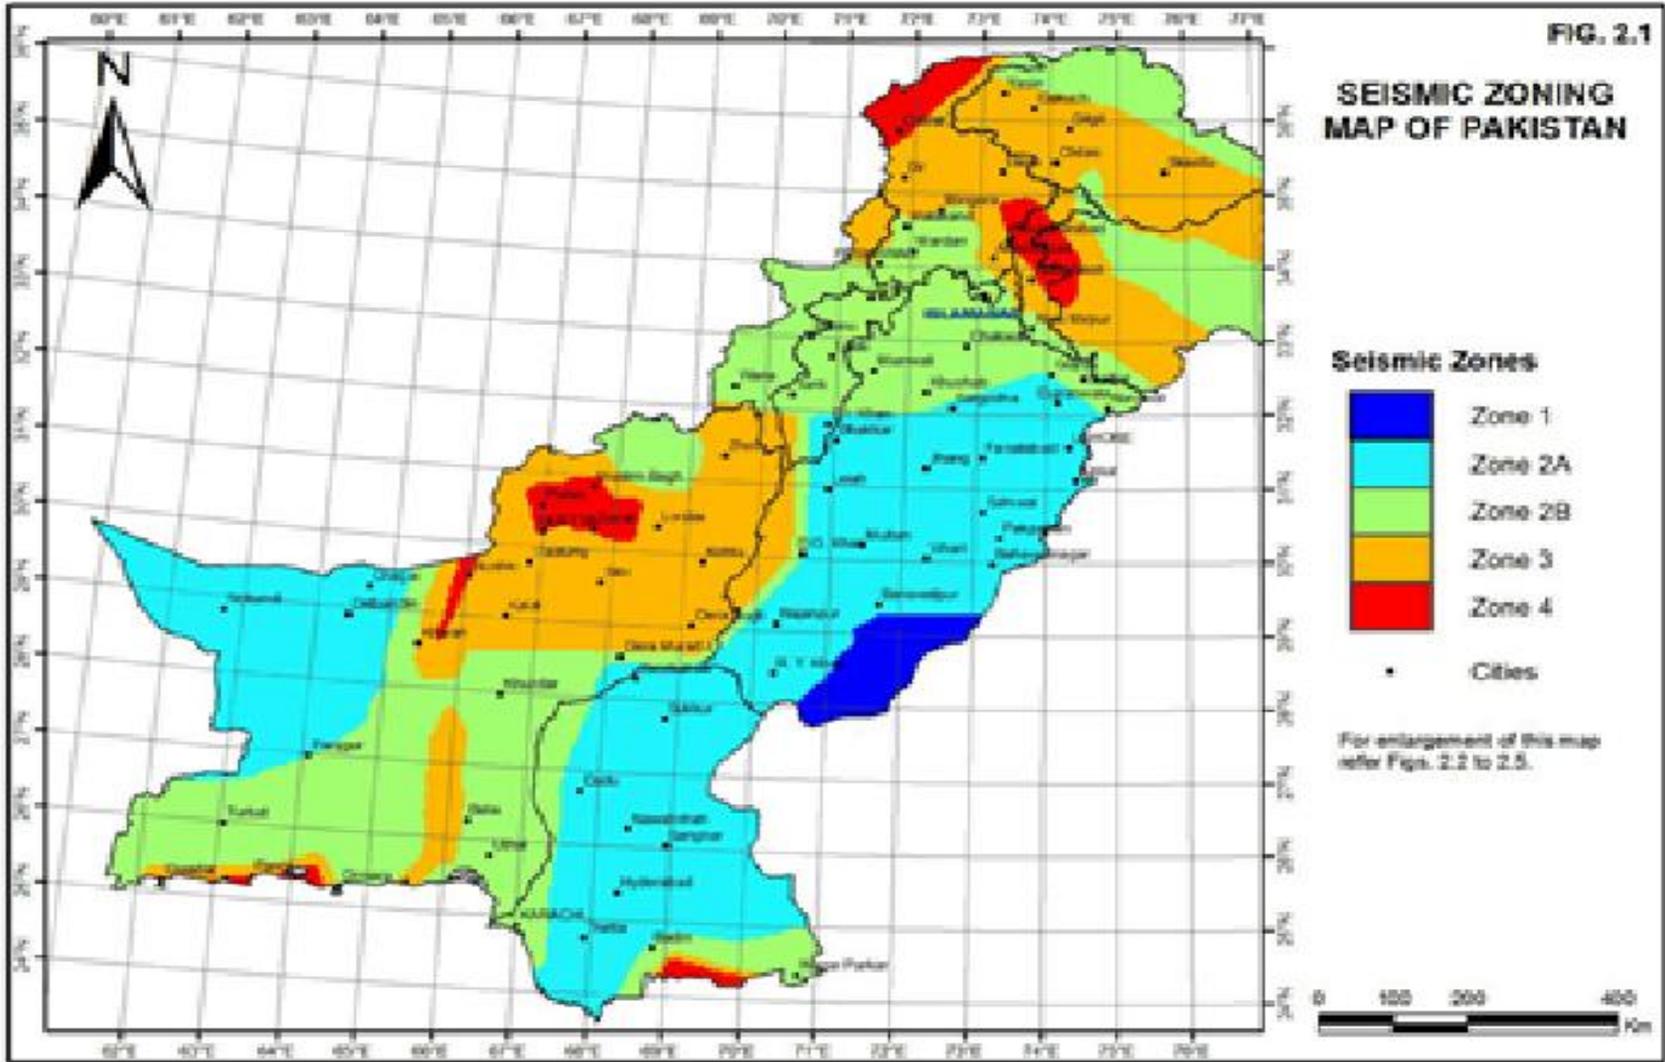


Figure 23-5 Seismic Zones of Pakistan

23.5 Ecological Environment

District Kasur is not rich with biological and ecological resources. However, the flora and fauna of the district includes; shrubs, herbs, mammals, birds, reptiles, amphibians and insects are found. They are discussed in detail below:

23.5.1 Aquatic Flora and Fauna

There is canal present in the study area which is being used for the irrigation purpose is Upper Chaneb Canal. No aquatic life is reported in Upper Chaneb Canal that can be at the verge of damage and disturbance. Moreover, no aquatic ecosystem (i.e., stream, river or pond) observed within or around the study area, which omits the possibility of any kind of aquatic species that may be harmed due to the establishment of stitching unit.

23.5.2 Flora

Flora of the district has been greatly modified by human agency of the old open forests of small trees and shrubs; there remains only a few Rakhs or portions of forest which are kept as grazing ground for cattle etc. Amongst trees the most important are Kikar (*Acacia arabica*), Shisham or Tahli (*Dalbergia sissoo*), Beri (*Zizyphus jayaba*), Toot (*Morus marlaccae*), Sharin (*Albizzia lebbek*), Dharek (*Malia azerdaracb*), Phulahi (*Acacia modesta*), and Nim (*Melia indica*), Piple (*Ficus indica*) are planted for shade. The growth in Rakhs is composed mainly of three kinds of trees Jand (*Prosopis spicigera*), Karril (*Capparis aphylla*), and van or Jal (*Salvadora obeoides*). Occasionally pelu (*acacia Loucophhloea*) and Farash (*Tamarix articulate*) are also found. Pilchi (*Tamarix gallio*) is found on moist sandy soil along the rivers and is used for wicker-work, basket making etc.

23.5.3 Fauna

For study of fauna in the project area, field guides and books were consulted. On the other hand field observations were conducted along with the interviews of local community members about the fauna of the area. The equipment used in field included cameras, binoculars and GPS device (wherever required). It is important to note that there is a number of factors which can change the findings of such survey. It may be pointed out that the pattern of seasonal migration of small birds varies depending upon each specie. During the construction activity in project area, no important biological feature will be damaged or disturbed.

The fauna commonly found in District Kasur includes; Hares, Falcon, Eagle, Quail, Starling, Jungle Pigeon, Russian Sparrow, Doves, King Fisher, Parrot, Crow and Local Sparrow.

Commonly found mammals in the area include; dogs, cats, horses, house-rats, squirrels, porcupines and bats. However, Small Indian Mongoose and Indian Palm Squirrel are also found in the District Kasur.

Table 4: Mammals in the Study Area

Sr. #	Common Name	Scientific Name
1	Rat	<i>Rattus</i>
2	Bat	<i>Chiroptera</i>
3	Small Indian Mongoose	<i>Herpestes javanicus</i>
4	Indian Palm Squirrel	<i>Funambulus palmarum</i>
5	Porcupines	<i>Erethizon dorsatum</i>
6	Squirrels	<i>Sciuridae</i>

The commonly found birds species include; House Sparrow, Crow and some of them are mentioned below with scientific names:

Table 5: Birds in the Study Area

S#	Common Name	Scientific Name
1	House Sparrow	<i>Passer domesticus</i>
2	House Crow	<i>Corvus splendens</i>
3	Pigeon	<i>Columbidae</i>
4	Bulbul	<i>Pycno notidae</i>
5	Teetar	<i>Francolinus francolinus</i>
6	Parrot	<i>Psittaci forms</i>
7	Titodi	<i>Vanellus indicus</i>

In District Kasur reptiles such as Snakes (Cobra and Kraits), Spiny Tailed Lizard and Fringed Toed Lizard are common in the tract, but cases of snake bites are very rare, as these reptiles have been either killed by expanding urbanization or they have moved away.

Table 6: Reptiles in the Study Area

S#	Common Name	Scientific Name
1	Snake	<i>Serpentes</i>
2	Spiny Tailed Lizard	<i>Uromastix hardwickii</i>
3	Fingered Toed Lizard	<i>Acanthodactylus cantoris</i>
4	Earthworm	<i>Lumbricina</i>

The amphibians commonly seen around the project area, especially during the rainy season includes;

Table 7: Amphibians in the Study Area

S#	Common Name	Scientific Name
1	Common Frog	<i>Rana temporaria</i>
2	Indus Valley Toad	<i>Bufo stomaticus</i>

A large number of insects are present due to open fields in the project site. Few of these insects are known to cause diseases in local population. Following is a list of commonly observed insects at the site:

Table 8: Insects in Study Area

S#	Common Name	Scientific Name
1	Black Ants	<i>Paratracheaiognicornis</i>
2	Dragon Fly	<i>Dragon Fly</i>
3	House Flies	<i>Musca domestica</i>
4	Butter Flies	<i>Parnassiusbalucha</i>
5	Honey Bees	<i>Apismellifera</i>
6	Wasps	<i>Anagyrus pseudococci</i>
7	Grasshopper	<i>Melanoplus differentialis</i>
8	Mosquito	<i>Anophlese sp.</i>

No endangered species are found at the site. The area has not been identified as ecologically sensitive area by wildlife department.

23.6 Environmental Monitoring

Laboratory analysis for environmental monitoring of proposed site is done in order to check the baseline conditions and pollution load. In this connection EPA certified laboratory, was engaged to carry out environmental monitoring of wind speed, air quality, drinking water quality, noise level and particulate matter concentration in the project area.

23.6.1 Sampling Sites

Samples of water, noise and air for testing according to the testing guidelines of Punjab-EPA.

23.7 Socio-Economic Resources

This section provides collective information about the existing socio-economic and environmental condition of the project area within the AOI. The different types of socio-economic aspects were covered such as demographic profile, occupation, education and health facilities. This data helped in identifying major interventions for the development of Environmental Management and Monitoring Plan (EMMP). The study also helped to assess the positive or adverse impacts on local community.

23.7.1 Cultivated Crops

The main crops that are being cultivated in the study area include; Rice, Wheat, Sugarcane, Onion, Tomato and Potatoes as well as fodder crops. The area is famous for best Basmati rice production in the world.

23.7.2 Socio-Economic Profile of Study Area

This topic provides an overview of the baseline information relating to the socio-economic environment of the project area and the AOI. The socio-economic study gives information about the demographic profile, occupation, education and health facilities in the project area.

23.7.3 Nearby Residential Areas

The proposed project site is located at Manga-Raiwind Road.

23.8 Social and Public Amenities Available

The social and public amenities present in the area are given below:

23.8.1 Physical structures

The land use on the project site is industrial. The people in this area are deprived of basic facilities like health, proper sewerage and sanitation facility, medical facilities, provision of safe drinking water, etc.

23.8.2 Religious Structure

There is no shrine, structure or any other religious infrastructure present in the said project site that could be damaged and dislocated due to the project establishment.

23.8.3 Protected Structures

There is no protected site, structure or any other social infrastructure present near project site.

23.8.4 Cultural Heritage and Community Structure

Zoom Consultancy & Services team also visited the study area but did not find any cultural heritage and community structure within the study area that could be impacted due to the proposed project.

23.9 Quality of Life Values

Socio-Economic Questionnaire and Environmental Checklist were used as survey tools by the Zoom Consultancy & Services survey team to collect desired information. Graphical representation of results of Socio-Economic Survey is given below:

23.9.1 Occupation of Respondents

Majority of the respondents (50%) are private Employee, 15% have their own business, 10% attached with agriculture, 10% attached with Transportation, 10 % are shopkeepers and remaining 5% are government employees. During survey, efforts were made to interact with people representing all walks of life. The detailed graphic representation of occupational status is given below:

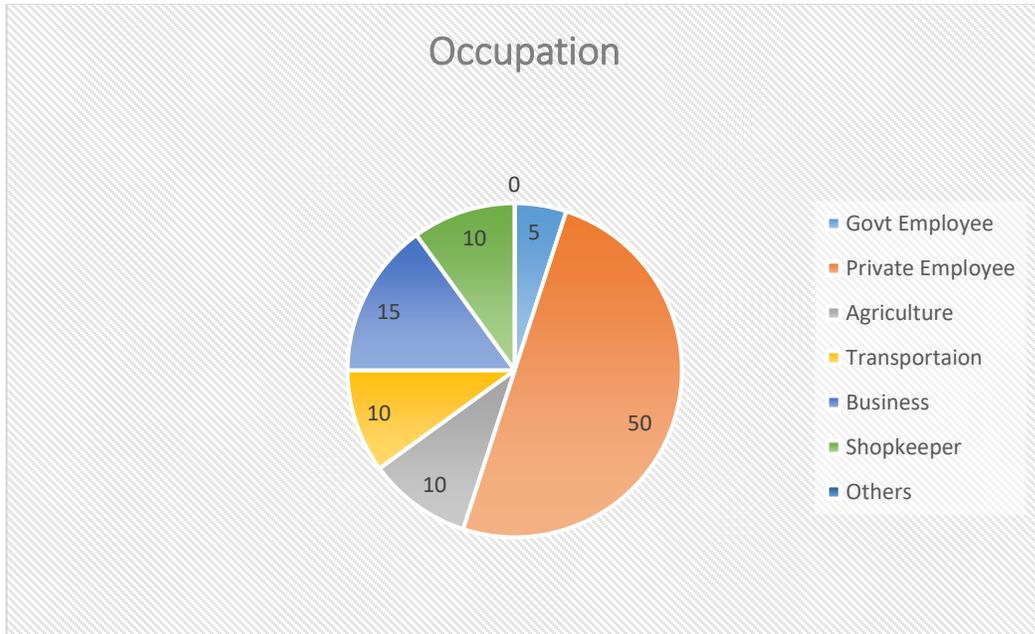


Figure 23-6: Occupation of Respondents

23.9.2 Literacy Rate

From survey results, it was found that 10% of the studied population was illiterate, 5% studied up to middle level, 15% of the respondents studied up to higher secondary level, 15 % respondent studied upto Higher Secondary level and 55 % respondents studied upto Graduation level.

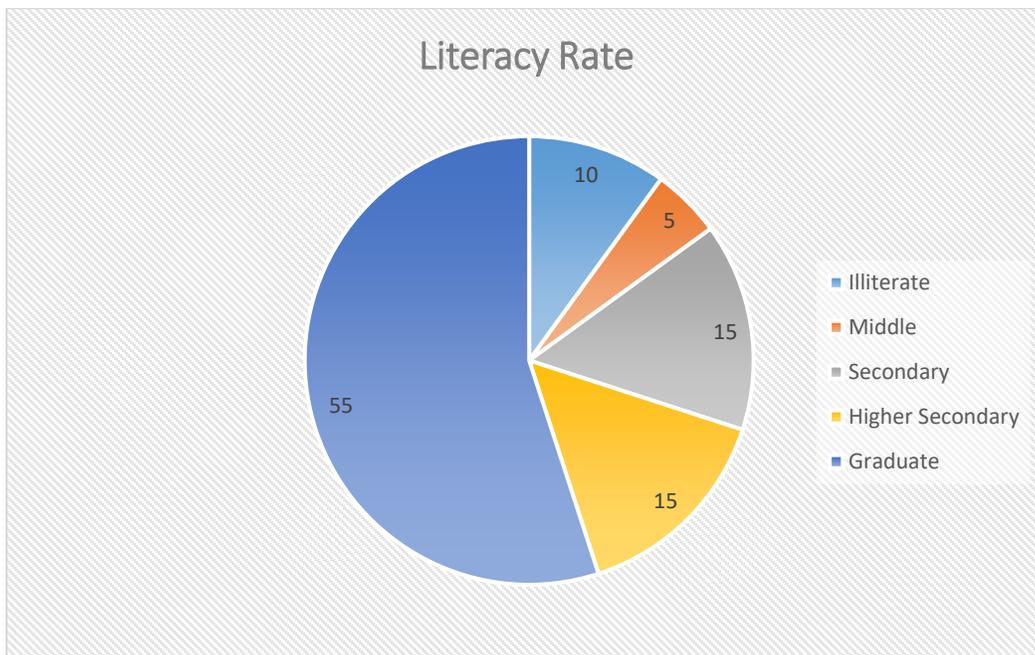


Figure 23-7 Literacy Rate of Respondents

23.9.3 Industries

There has been a steady expansion of industries in and around District Kasur since independence. Industries nearby project site are shown in map below:

23.9.4 Educational facilities

Various government and private educational institutes are present near project site,

23.9.5 Health facilities

Various hospitals are present near the project site. Social Security Hospital is adjacent to the site as shown in google map attached.

CHAPTER 5: STAKEHOLDER CONSULTATION

24.1 GENERAL

Public consultation refers to the process by which the concerns of local affected persons and others who have plausible stake in the environmental impacts of the project or activity are ascertained with a view to taking into account all the material concerns in the project or activity design as appropriate. According to the IEE and EIA Review Regulations, public consultation is mandatory for any socio-environmental study.

Impact assessment survey and public consultation sessions held with different stakeholder groups that may be impacted by the said project development. The consultation process was carried out in accordance with the guidelines laid by EPA. The objectives of this process were to:

- Share information with stakeholders on said project installation and operation
- To assess the impacts on the physical, biological, and socio-economic environment
- Understand stakeholder concerns regarding various aspects of the project
- Understand the perceptions, assessment of social impacts and concerns of the communities of the project area
- Find out the awareness level and situation of acceptability to identify any issues for the implementation of the said project
- To invite people to express their views about the positive/negative impacts on their life styles and environment

This report includes all the comments, which were taken into account in preparing the definitive development concept for the establishment of said project. Public consultation performance is attached as Annexure of this EIA Report.

24.2 OBJECTIVES OF CONSULTATION

Public consultation plays a vital role in studying the impacts said project on stakeholders in its successful implementation and execution. It provides an opportunity to exchange knowledge with the all stakeholders. Referring particularly to a project related to environmental assessment, involvement of public is all the more essential, as it leads to better and more acceptable decision-making. The overall objective of the consultation with the stakeholders is to help verify the environmental and social issues, besides technical ones, that have been presumed to arise and to

identify those which are not known or are specific to the project. In fact, discourse with many who have thoroughly observed the site conditions in the pre-developmental phase, goes a long way in updating the knowledge and understanding.

24.3 IDENTIFICATION OF STAKEHOLDERS

All the people who are directly or indirectly affected or concerned with the project are the stakeholder. Besides the living population of the surrounding areas, some other stakeholders were identified and contacted. They are the key players including; shops owners, vendors, public offices, school, university, hospitals,. Not only published material (Both brief and comprehensive literature were obtained on request) but also noted their views and the concerns. Following stakeholders are identified for this project:

Project stakeholders include the settled families, either property owners or the tenants, businessmen (land owners, traders, shopkeepers, vandors, transporters, restuarent owners etc.), employees of the commerical entities. PAPs are of two types, for instance:

24.3.1 Direct

In this case, the PAPs are those who will be benefited directly by project. No disturbance on the local community is being foreseen due to the installation of the said plant.

24.3.2 Indirect

Indirect impact will occur on those who are living or doing business within project area of influence. Indirect respondents include;

- ✓ Government agencies responsible to deal with the project related activities
- ✓ Government Agencies directly, indirectly or widely involved in the execution and monitoring of the said project
- ✓ Workers of political, cultural, religious or social scientific bodies, directly or indirectly related

24.4 PUBLIC DISCLOSURE

Public disclosure is the outcome of all such activities where public is involved at least in the information sharing process. This is an integral part of that process so before the proponent applies for NOC to the EPA, this disclosure will be distributed properly among all stakeholder. It is the

responsibility of the proponent and the consultants to display public disclosure document at prominent places where community has easy access.

24.5 CONSULTATION PROCESS

Information disclosure, public consultation and discussion regarding the various aspects of the project with the people of the area are necessary. This process is intensified during the EIA Studies, and separate rounds of public consultations were held. Surveys were carried out in order to investigate physical, biological and socio-economic resources falling within the immediate area of influence of the project. Primary data collection included:

- Data collection regarding the socio-economic condition of the study area
- Pretesting of socio-economic survey tools in the field
- To consult the locals for collection of information on biological environment

Various meeting with the stakeholders were held the following objectives:

- Share information with stakeholders on the said project and expected impacts on community in the vicinity of the project
- Understand stakeholders' concerns regarding various aspects of the project, including the existing condition of the upgrading requirements, and the likely impact of construction and operation activities
- Provide an opportunity to the public to influence the project design in a positive manner
- Obtain local and traditional knowledge, before decision making
- Increase public confidence about the proponent, reviewers and decision makers
- Reduce conflict through the early identification of controversial issues, and work through them to find acceptable solutions
- Dissemination of information through discussions, education and liaison
- Documentation of information narrated by the stakeholders and mitigation measures proposed by the stakeholders
- Incorporation of public concerns and their address in the EIA; and eliciting their comments and feedback

24.5.1 Consultation Methodology

The methodology adopted for consultations is summarized below.

24.5.1.1 Consultation Material

The main document for distribution to stakeholders during the consultations was Social Impact Assessment Interview. The filled Survey forms of stakeholders are annexed

24.5.1.2 Consultation Mechanism

Primary stakeholders were consulted during informal and formal meetings held in the project area. The consultation process was carried out in the Urdu language. During these meetings a simple, non-technical, description of the project was given, with an overview of the project's likely human and environmental impact. This was followed by an open discussion allowing participants to voice their concerns and opinions. In addition to providing communities with information on the said project, their feedback was documented during the primary stakeholder consultation. The issues and suggestions raised were recorded in field notes for analysis, and interpretation.

By reaching out to a wider segment of the population and using various communication tools such as participatory needs assessment, community consultation meetings, focus group discussions, in-depth interviews, and participatory rural appraisal EIA involved the community in active decision-making. This process will continue even after this EIA has been submitted, as well as during future EIA in which similar tools will be used to create consensus among stakeholders on specific environmental and social issues.

Secondary stakeholder consultations were more formal as they involved government representatives and local organizations, consulted during face-to-face meetings. They were briefed on the EIA process, the project design, and the potential negative and positive impact of the project on the area's environment and communities. It was important not to raise community expectations unnecessarily or unrealistically during the stakeholder consultation meetings in order to avoid undue conflict with community's leaders or local administrators. The issues recorded in the consultation process were examined, validated, and addressed in the EIA report.


24.5.2 Primary Stakeholders Consultation

The community consultations were conducted with the community members outside their settlements to encourage and facilitate their participation.


24.5.2.1 **STAKEHOLDER CONCERNS AND RECOMMENDATIONS**

The finding of the community consultation has been addressed in various sections of EIA. Mitigation plan has been incorporated into EMP. The summary of consultation with various stakeholders is given below


Out of total respondents of, 77% knew about the project whereas 23% were not aware of the project planning and implementation. All people were then briefed about the project.

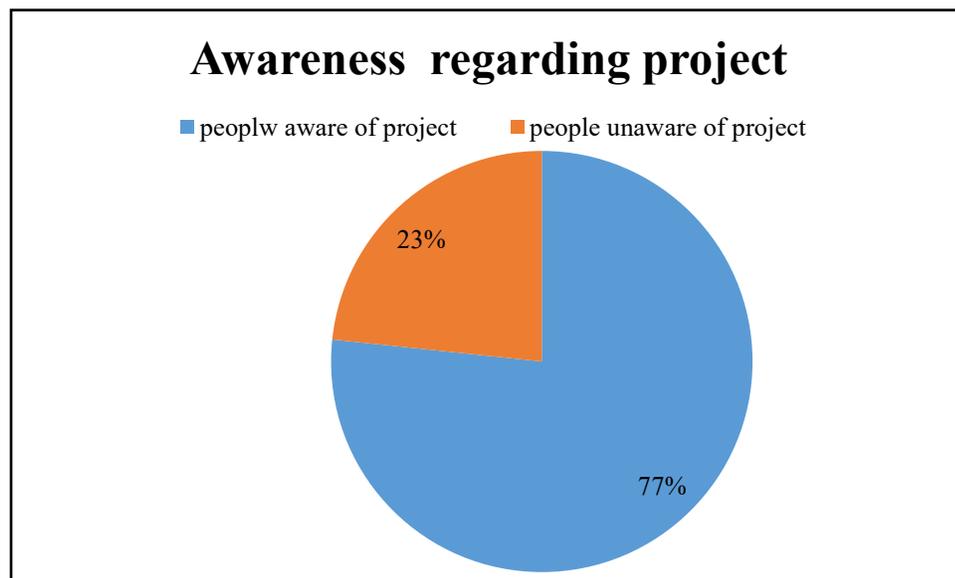

89% commented their views about the project and 11% didn't respond.

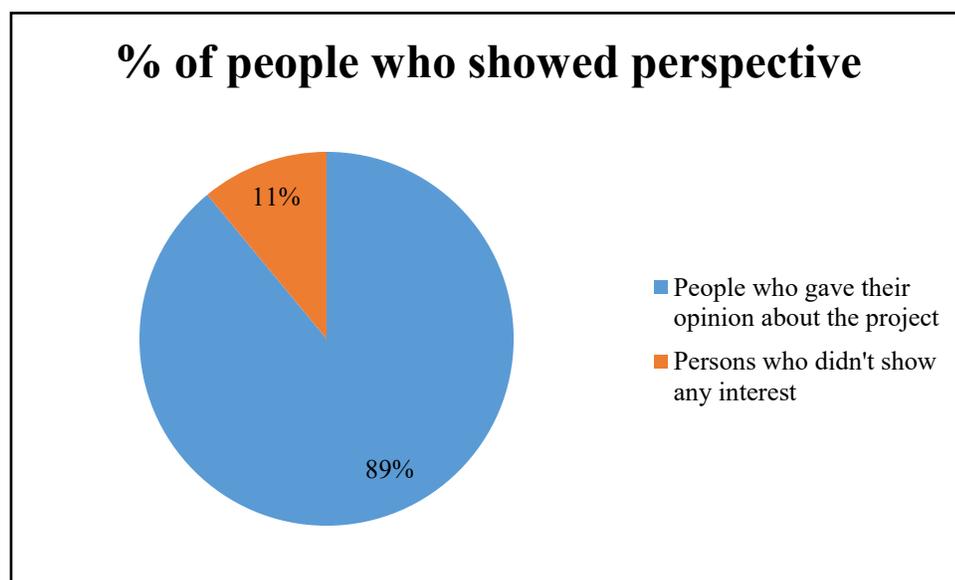

Out of 89%, majority of the people (about 94%) favored the construction of the project keeping in view its importance and 6% people showed pessimistic views in general but mitigation measures and solutions to their concerns were provided.

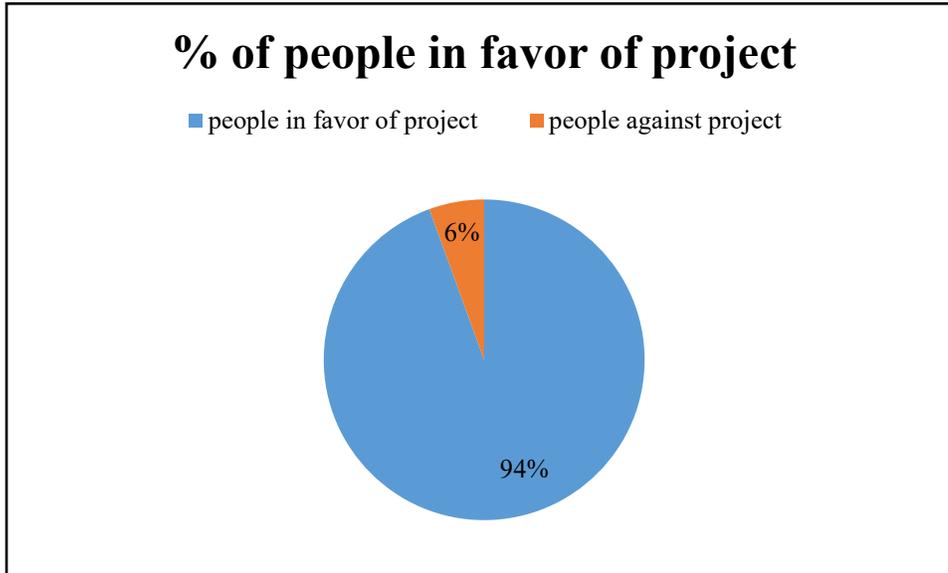

Majority of people were in favor of project. They said that project will result not only in direct jobs opportunities for locals but also will enhance subsidiary business, trade, education, and agriculture and community development. The people were of the view that industry might also elevate education standards, struggle for career enhancement besides improvement in standard and quality of living in area. People were also of the view that industry may also be instrumental in connecting the local people with major cities and will result in increase in GDP.

Very few near to 6 % only shows concerns over power house emissions, noise, wastewater and health impacts. Majority of the concerns were changed in the favor of installation after communicating the participants proper solutions and mitigation measures

24.6 STAKEHOLDERS CONSULTED

Names of consulted stakeholders are given in table below:

Table 24-1: List of consulted stakeholders

Sr. No	Stakeholder name

1.	Muhammad Hakim
2.	Abdulaziz
3.	Asghar Ali
4.	Kashif Ali
5.	Parvez Hussain
6.	Muhammad Naeem
7.	Muhammad Zulfiqar
8.	Muhammad Waqar
9.	Muhammad Arif
10.	Muhammad Javed
11.	Muhammad Jalal
12.	Muhammad Tofail
13.	Syed Barat Hussain
14.	Arif Khan
15.	Basheer Hussain

24.6.1 Secondary Stakeholders Consultation

The consultations were carried out with the local government officials and officials of the following departments:

1. District Office Environment
2. Proponent
3. Environmental Precautionar

Comments and recommendations of all government representatives are presented in table below:

S#	Participant	Designation	Concerns/Remarks
Responsible Authority			
1	Mr. Rafiq	Inspector Environment	<ul style="list-style-type: none"> • Environmental enhancement measures such as; Tree plantation, monitoring and safety should be ensured • HSE plan should be enforced strictly • Should work for local people benefit

			<ul style="list-style-type: none"> • Preventive measures should be adopted to avoid any unfortunate incident
Proponent			
1	Abdul Wajid	Representative of Proponent	<ul style="list-style-type: none"> • Local employment will be ensured • Tree plantation will be done to make project environment friendly • No waste will be dumped improperly • Quality will be ensured
Environmental Practitioners and Experts			
1	Dr. Muhammad Faqir Irfan	PhD. Environment Lawyer	<ul style="list-style-type: none"> • Health and safety arrangements must be provided

CHAPTER 6: POTENTIAL ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES

25.1 GENERAL

This chapter describes the potential environmental and social impacts of the proposed activities, predicts the magnitude of the impact and assesses the significance. The main intention of this section is to provide the mitigation measures that need to be adopted wherever necessary, to reduce, minimize, or compensate for the negative impacts.

25.2 IDENTIFICATION OF POTENTIAL IMPACTS

In the first step, potential impacts of the project are identified by desktop screening exercise, using checklists during field visits for collection of baseline data, professional judgment, published literature on environmental impacts of similar projects and standard environmental guidelines. Potential impacts are also identified through discussion with project proponent, consultation with stakeholder and community to identify their concerns. The main aspects associated with potential impacts are as follows:

- Water resources
- Ambient Air Quality
- Waste discharges
- Noise pollution
- Ecology of the area, including flora and fauna
- Vehicle movement
- Socio-economic conditions
- Archaeology

25.3 CLASSIFICATION OF IMPACTS

According to the type of potential receptors, the potential impacts are classified. The following receptor categories were used.

Category of Receptor	Description

Community	People their social and cultural values, aspirations and archaeological sensitivity
Land and Soil	Land resources, soil resources
Air Quality	Ambient air quality
Water Resources	Ground and surface water resources
Ecosystem	Vegetation, wildlife and biodiversity

25.4 SCOPING CRITERIA FOR IMPACTS

The identified potential impacts of the project are evaluated on the basis of following criteria;

- The present baseline condition, the change in environmental parameters likely to be affected by the project related activities;
- Is there any impact that environmental standards or environmental guidelines applicable to the project will be breached?
- Is there a high risk of permanent, irreversible, and significant change to environmental condition due to particular project activity?
- Did the community express any concern about this aspect?

25.5 METHODOLOGY FOR IMPACT ASSESSMENT

The impact assessment methodology defines three levels of consequences (or severity) and likelihood (chance of occurrence) i.e. Low, Moderate/Medium or High. The significance of an impact is determined on the basis of the level of consequence and likelihood of the impact.

Table 25-1: Definitions of severity and likelihood of impacts

Level	Severity of Impact (Consequence)	Likelihood
High	Serious / catastrophic damage to local and regional environment Serious threat to corporate reputation/ profitability / ability to do business	High likelihood of occurrence during lifetime of operation Regular / continuous part of operations
Moderate	Measurable damage to the environment Potential to affect reputation / cost Reduced efficiency	Moderate possibility of occurrence during lifetime of operation Periodic / occasional part of operations
Low	Negligible damage to the environment No risk to business	Unlikely to occur during lifetime of operation

Table 25-2: Impact Significance Matrix

		Likelihood (Probability of occurrence)		
		High	Medium	Low
Impact (Consequence)	High	High	High	Medium
	Medium	High	Medium	Low
	Low	Medium	Low	Low

The prediction of impacts also includes the duration of impacts in terms of short-term or long-term, nature of impact, geographical location of the impact, reversibility of the impact. The criterion for impact assessment is illustrated in the Table

Table 25-3: Impact Assessment Criteria

Impact Characteristics	Categories

Nature of the Impact	<p>Direct: The environmental parameters that are directly affecting by this project.</p> <p>-Indirect: The environmental parameters change due to the combinational effect by project and environmental impacts</p>
Duration of the Impact	<p>Short term: Lasting only till the duration of the project</p> <p>Medium term: Lasting from a few months to a year</p> <p>Long term: Lasting for a period much greater than medium term impacts</p>
Geographical Location of the impact	<p>Local: Within the area of project i.e. operation site and access roads</p> <p>Regional: Within the boundaries of the project area</p> <p>National: Within the boundaries of the country</p>
Reversibility of the impact	<p>Reversible: When a receptor resumes its pre-project condition</p> <p>Irreversible: When a receptor cannot resume its pre-project condition</p>

25.5.1 What is the problem?

The project is about Shoe Moulds manufacturing industry, namely “Establishment of Shoe Mould Manufacturing Unit by M/S Xida Mould (Pvt) Ltd. The major impact associated with the construction and operation of said industry includes solid waste management, wastewater management, noise emissions, tree plantation and fire-fighting arrangements.

25.5.2 When problem will occur and when it should be addressed?

The impacts from the said industry mainly occur during the construction and operational phase of the project. These issues include; noise generation, fugitive dust emissions, solid waste management, wastewater disposal, top-soil removal, Health and Safety issues and change in the geographic features of the area. These all problems should be addressed on-site where they are being generated, to avoid the residual or adverse impacts. The tell the description and impacts to Government and public by reports and public hearing.

25.5.3 Where problem should be addressed?

The problem will be generated from site development and operation of the industry. So, it should be addressed on source, i.e. at site within the same timeframe.

25.5.4 How the problem should be addressed?

Problem should be addressed with its full detail i.e. its magnitude, possible impacts and problem, long time effect, environmental impacts, and proper mitigation measures will be provided according to the nature of the impacts/problems.

25.5.5 Ways of Achieving Mitigation Measures:

Following ways will be adopted to reduce the impacts of the said project:

25.5.5.1 *Changing in Planning Design*

The design of industry is developed considering environmental risk and hazards. As the area is industrial lot of industries are present there. Moreover, there is no endangered and threatened species present in the project area. Any human settlement or infrastructure was not dislocated or dismantled due to the project development. The proper roads and transportation system along with migration measures is there. The project is fare away from urban development. Not any impact will affect the urbanization. Hence, there is no need to change the design of the project.

25.5.5.2 *Improved Management and Monitoring Practices*

The anticipated impacts will be reduced significantly by adopting better management activities, as it will be carried out for the betterment of the society. While environmental monitoring will be conducted on the regular basis to keep the sources of the air pollution, wastewater generation, noise and public nuisances in-check. All the migration measure and advance technology will be implanted to mitigate the impact. All the practices will meet the Punjab environmental standards and international standard like OSHA and AEPA.

25.5.5.3 *Compensation in Money Terms*

Due to the development of the project, no tree cutting is involved, however, there is no protected or environmentally sensitive area present within 2.0 km vicinity of the project that could be impacted. Hence, no compensation in the monetary terms is required.

25.5.5.4 *Replacement/Relocation/Rehabilitation*

The project site is owned by the proponent and reserved for the said industry. No replacement, relocation and rehabilitation is required for the commencement of the aforesaid project.

25.6 Impact Summary

Environmental Parameters	Impact Assessment during Different Phases	
	Construction	Operational
A: Physical		
Land Resources		
Soil Erosion and Contamination	0	0
Transportation	-1t	-1 t
Solid Waste and By-Products	-1t	+1p
Land Use	NA	NA
Air Resources		
Noise Pollution	-1t	-1p
Air Emission	-2t	-1p
Dust	-1t	-1t
Water Resources		
Ground Water	-1t	-1p
Surface Water	NA	NA
Wastewater	-1t	-1p
B : Ecological		
Flora		
Tree Cutting	N/A	N/A
Fauna		
Terrestrial Fauna	N/A	N/A
C: Socio-Economic		
Employment Opportunities	+1t	+1p
Land Value Appreciation	N/A	N/A
D: Hazards		
Physical Hazards	-1t	-1p
Health and Safety	-1t	-1p
<i>Legends: 1= Low; 2= Medium; 3= High; 4= Extremely High; NA= Not Applicable; t= Temporary; p= Permanent; app= Applicable; 0= Negligible</i>		

25.7 IMPACTS DUE TO PROJECT LOCATION

The said project site is located in area surrounded by other industries. As all the rules and migration procedure is applied. The project site is owned by the company. Further, the project site is devoid of any human habitation hence evacuation of the project-affected persons will not be involved in this project. Thus, no resettlement and rehabilitation issues will be involved in the said project.

This project will be developed while undertaking minimum cutting for making terraces for construction while making minimum modifications in the terrain conditions and implementing environmental measures.

The topsoil removed from the site will be restored in dumps during construction period and in the post construction phase. The top soil will be spread on the unbuilt area of the plot and tree plantations and green belt development will be taken up. As the top soil removed from the site will be reused for the growth of plants, no adverse impact will be envisaged due to removal of topsoil from the site.

25.8 DESIGN PHASE

In general, the design of the said project optimized the use of best available technology in order to prevent or minimize potentially significant environmental impacts associated with the project as well as to ensure high level business and environmental performances. In pre-construction / design phase, a management system will be provided at design level for the reduction of impacts. Design of the said project will adhere to all standard technical requirements in order to avoid adverse impacts on the environment and human health. Efficient infrastructure will be developed. Procurement of construction materials from approved dealers will be ensured.

25.9 IMPACTS ASSOCIATED WITH CONSTRUCTION PHASE

Sr. No	Aspect	Impacts	Mitigation Measures
1	Economy Improvement	During construction phase, employment opportunities for local people will be generated. Raw material will be obtained locally increasing the economic value of area.	No specified mitigation measure is required. The contract is signed with the authorized construction companies. All of labor rules will applied on them.
2	Air Quality	During construction phase, suspended particulate matter are the main pollutants during the site	Dust emissions will be minimized through strict enforcement of onsite speed controls.

		<p>development activities such as leveling of land, filling activities, transportation of construction material to the project site from various places.</p> <p>Fugitive emissions will be observed due to vehicular movement. But it will be negligible or temporary phenomenon.</p>	<p>The routes will be sprinkled with water regularly to reduce the amount of dust generated by construction vehicles.</p> <p>Construction machinery will be kept away from the walkways.</p> <p>All the vehicles carrying the construction material will be fully covered and well maintained.</p> <p>The inspection of the vehicles and construction machinery will do on regular basis.</p> <p>All vehicles and construction machinery will be properly tuned, serviced and monitored on regular basis.</p>
3	Water Quality	<p>During construction phase, water will be required for construction of structures, sprinkling on roads for dust suppression, domestic uses of construction workers</p>	<p>During this phase, water conservation practices will be given proper consideration.</p>
4	Relocation of Utilities	<p>The project site is already near other industries. The construction will not relocate the existing public utilities.</p>	<p>No mitigation measure is required.</p>
5	Solid Waste Generation	<p>During excavation of the site for foundation works and landscaping, solid waste will be generated. The waste consisted of metal cuttings, rejected materials, surplus material,</p>	<p>Recyclable material will be separated at source.</p> <p>The cement bags and other such items will be handed over to</p>

		paper bags, cement bags, empty cartons and broken glass pieces.	<p>approve contractors on weekly basis.</p> <p>Other waste will be accumulated at waste area and will be taken by the municipal waste management company.</p>
8	Worker's Health, Safety and Environment	The construction activities had the potential to pose negative impact on the health and safety of workers in case of unfavorable working conditions.	<p>The contractor ensured that the workers and labors will be trained in safety procedures for all relevant aspects of the construction.</p> <p>Workers will be provided with proper safety equipment which were required on the basis of nature of the work.</p> <p>First aid kits will be kept available on the site to ensure safe working environment for the labors and workers.</p> <p>As per the requirement warning signs will be displayed in local language.</p> <p>Proper fencing will be done around the site.</p> <p>A safety officer will be appointed at the site for risk assessment and ensure the safety of workers.</p>

25.10 IMPACTS ASSOCIATED WITH OPERATION PHASE

During the operation phase different type of the process will be done. The possible impacts of the process activities is being evaluated as down here.

In this section, the combined environmental and socio-economic impacts associated with the said process of this project in operation phase are discussed. The impacts that are discussed are as follows:

Environmental Impacts

- Air emissions
- Noise
- Traffic
- Solid waste and by-products
- Wastewater
- Resource Consumption
- Abnormal conditions
- Occupational Health and Safety

Socioeconomic Impacts

- Employment Opportunity
- Community Development

25.11 ENVIRONMENTAL IMPACTS

25.11.1 AIR EMISSIONS

POTENTIAL IMPACTS

Air emissions from the project are relatively small and specified. Fugitive dusts and emissions may result during raw material handling and storage which is relatively less likely to occur. Some volatile organic compounds may present due to miss-handling and unfortune events. Other potential sources for air emissions are combustion products (nitrogen oxides, sulfur dioxide, particulate matter, carbon monoxide) from standby diesel generators, boilers and combustion products from vehicles used for project activities. Air Emissions from generator include Smog producing compounds like nitrogen oxides and volatile organic compounds. The smoke of boilers

and generator produce other compounds like, Particulate matter, Carbon monoxide, Sulfur dioxide, Air Toxins (Toxics), Greenhouse Gases, Wastewater (once-through cooling water, cooling system blowdown, boiler blowdown, water-side boiler cleaning and demineralizer regenerant. The emissions from standby generators will be less in concentration. The emission levels depend on the type and quality of fuel and the manner in which it is burnt.

MITIGATION MEASURES

The following mitigation measures will be implemented. The proposed mitigation measures to reduce the impacts on air quality during the operation activities are:

- Electrical Furnace will be used
- Power Engines will be equipped with air emission control technology.
- Monitoring of Ambient air parameters (Particulate matter, SO_x, NO_x) emissions should be carried out on regular basis to ensure compliance with the PEQS.
- The inspection and the maintenance of the boiler and generator will be done on regular basis.
- Plantation of indigenous trees within the premises and along the boundary.

RESIDUAL IMPACT

If proper mitigation measures are effectively implemented, the residual impact of the proposed activities on the area's air quality is expected to be low in terms of significance, reversible.

25.11.2 NOISE

POTENTIAL IMPACTS

The main sources of pollution from noise are during raw material and finished good loading and unloading, vehicle movements, operation of machines. The increased noise may be a source of disturbance to workers, working near to the machines. The main source of the noise is boiler and power house unit. But this area is closed and separated from other operational areas. So, the Noise level during operation phase of unit will be limited to specific site. In the dying, unit latest machinery is planted that has low level of noise. Workers could be exposed to high noise levels for limited time, however only concerned staff will be working in the area with required personal protective equipment (PPE) to minimize or reduce the noise exposure.

MITIGATION MEASURES

The following mitigation measures will be undertaken in order to further reduce the noise levels:

- Effective noise suppression design and plan will be made for all noise producing equipment i.e. high noise generating machines will be kept in isolation from other machines to minimize the overall cumulative noise.
- Noise barriers should be implanted
- The repairing and the small source of noise will be removed if it will possible.
- PPEs are provided to workers
- Proper tree plantation has been done
- Noise monitoring will be carried out periodically.

RESIDUAL IMPACTS

Implementation of the mitigation measures proposed above will result in negligible to no residual impact due to unit noise on the surrounding environment.

25.11.3 TRAFFIC

The operational phase of the unit will result in increased traffic. However, the impact will be minimal. Vehicles will be well maintained to prevent unnecessary exhaust emissions and drivers will be appropriately trained.

MITIGATION MEASURES

The following mitigation measure will be implemented.

- Nighttime driving of project vehicles will be limited where possible.
- Vehicles will remain confined to defined access.
- The rote of the vehicles will be defined and given to drivers and security system.
- The road will be labeled according to the rules and regulations.
- Speed limits will be maintained.
- The timetable and schedule of the vehicles will be defined and the monitoring of vehicles will be done every time.
- Road signage relevant to the project traffic will be placed, where necessary.

- Community complaint register and other means will be adopted for the community to complain about non-adherence of traffic to speed limits, safe driving and other safety related concerns.
- All vehicle drivers will be trained in community safety aspects. Drivers will be trained in responsible and safe driving practices; safe speed limits for vehicles will be followed.

25.11.4 **SOLID WASTE**

Solid waste generated will be generated from process and domestic activities from the canteen and admin block will produce. Most of the generated waste will be recyclable. Aluminum will be remelted in furnace where fuel will be electrical. All the waste will be segregated from its production line. The generated domestic solid waste will be handled as per area practices. If the waste management is not carried out properly, it can affect health of workers, pollution of soil, surface or ground water. All waste generated from the project will be managed by proposed controls. The environmental impacts will be minimized after the implementation of the proposed mitigations.

MITIGATION MEASURES

The following mitigation measures will be implemented:

ON-SITE HANDLING

- There will be separated bins for segregation of different type of waste
- Proper waste collection system will be ensured. For this purpose, waste bins are placed inside the boundary.
- The recyclable waste will be sent to waste contractors.
- Proper person will be hired for the collection and removal of waste from the site.
- Records of generated waste should be maintained.
- All non-hazardous waste that can be recycled or reused will be handed over to the contractors.
- Training will be provided to personnel for identification, segregation and management of waste.
- All containers of waste will be labeled properly.
- All the container should be kept clean, making sure no dust will produce in it.

- The proper waste management system will be applied.
- Small bins and large containers will be provided on every waste producing site at defined place causing no risk to worker and machinery.
- In-house audits of the waste management will be undertaken on regular basis.

RESIDUAL IMPACTS

Proper implementation of the mitigation measures will minimize the residual impact from waste. Monitoring and inspection will be undertaken to ensure the implementation of mitigation measures.

25.11.5 WASTEWATER

Wastewater will be produced from domestic uses. The wastewater may include different type of chemicals due to usage of dyes.

Mitigation Measures

- For treatment of wastewater, septic tank will be installed
- Wastewater will be disposed off in nearby Drain, the management has obtained approval.

RESIDUAL IMPACTS

Implementation of the proposed mitigation measures and regular monitoring is not likely to leave any significant impact of the waste water from the unit.

25.11.6 ABNORMAL CONDITIONS

Abnormal events might include loss of power and diesters. The unit will have its own backup power supply using diesel generator to protect against a loss of power. This site is fare from river so no changes of flood. As the project will be constructed above to the ground and high liniment so when the heavy rain occur the water flow will stand on project site.

25.11.7 OCCUPATIONAL HEALTH AND SAFETY

This section discusses the occupational health and safety impacts of the operation of said unit. Physical hazards may include exposure to same-level fall hazards due to slippery conditions. In a variety of situations, a worker can be exposed to lifting, carrying, and repetitive work and work posture injuries.

MITIGATION MEASURES

In order to reduce the physical hazards and other health and safety issues that may be encountered at workplace, following will be followed.

- Proper training will be provided for the proper usage of machineries and personal protective equipment (PPE) will be provided. It will be ensured that the individual who has received the correct training is operating a particular machine.
- Risk Assessment will be done on daily basis
- Emergency response plans will be remained active.
- Monitoring cameras and sensors will be implanted at the work site
- OSHA polices will be implemented on site
- Regulation of the health and safety polices will be done on regular basis
- Training of staff in the handling of lifting materials.
- Timely maintenance and repair of electrical equipment will be conducted.
- At workplace, first aid facilities will be maintained at readily accessible places.

25.12 SOCIOECONOMIC IMPACTS

A summary of potential socio-economic impacts of the project is presented in Table below.

Table 25-4: Potential Socioeconomic impacts of the project

Impact	Beneficial	Adverse
Economic	<ul style="list-style-type: none"> • Employment generation • Procurement of equipment and services • Local authority business tax / rates revenue • Increase in property value 	Negative economic Impacts are not anticipated
Social	<ul style="list-style-type: none"> • Indirect beneficial community impacts from employment 	Risks of occupational and environmental health issues.

	<ul style="list-style-type: none"> • Provision of training to employees and workers 	
--	--	--

By implementing the following mitigation measures, impact to community can be minimized.

- All vehicle drivers will be trained in community safety aspects.
- The company will maintain a social complaint register at the site to document all complaints received from local communities. The register will also record the measures taken to mitigate these concerns.
- It will be ensured that generators, vehicles, and other potentially noisy equipment used are in good condition. Noise from generators, vehicles and other equipment will be kept to the minimum through regular maintenance.
- Maximum number of unskilled and semi-skilled jobs will be reserved for the local communities.

25.12.1 EMPLOYMENT OPPORTUNITIES

The project is expected to have positive impact on economic condition of locals. Employment opportunities will be generated due to project activities.

Similarly, the operation of the project will create far greater number of indirect income resources for example income resource for transporters for the transportation of the raw materials, procurement of required goods from local market etc.

Overall, the project will have a positive impact on the employment opportunities of Pakistan.

25.13 POTENTIAL ENVIRONMENTAL ENHANCEMENT MEASURES

25.13.1 GREENBELT DEVELOPMENT

Apart from functioning as a pollutant sink, green belts provide other benefits like:

- Green belt helps in noise abatement for the surrounding area. Thus, it is recommended as noise barriers.
- Green belt will help to regulate the air quality
- Green belt also absorbs extra heat help to maintain the change of enthalpy
- Green belt will provide natural refreshment to workers
- It will increase the ornamental beauty of the industry

CHAPTER 7: ENVIRONMENTAL MANGEMENT AND MONITORING PLANS

26.1 GENERAL

This EIA provides the Environmental Management Plan (EMP) of the project to keep it environment benign as well as the monitoring plan to ensure the compliance of the established EMP.

Outline and key features of the EMP for construction and operations phase is presented in sub-sections below. As per the environmental legislation in Pakistan, the EMP for the operations phase, along with other documents, is to be submitted to the environmental protection agency to obtain confirmation for compliance and Environmental Approval for project operation. Even after implementation of the suggested mitigation measures, the impact may remain significant, and require regular monitoring. This section also underlies the monitoring framework for both construction and operation phases to check compliance of the EMP and to take timely actions for correction in case any accident of significant criteria, requirements or goals are found.

26.2 OBJECTIVES OF ENVIRONMENTAL MANAGEMENT PLAN

The primary objectives of the EMP are to:

- Facilitate the implementation of the mitigation measures identified
- Define the responsibilities of the project proponent and contractor and provide a means of effective communication of environmental issues between them.
- Identify monitoring parameters in order to ensure the effectiveness of the mitigation measures
- Provide a mechanism for taking timely action in the face of unanticipated environmental situations.
- Identify training requirements at various levels.
- To apply the rules and regulation of the Punjab Environmental laws and international standards
- Making of environmental managemental polices
- Reviewing, regulating and improving of environmental policies on regular basis.

26.3 MANAGEMENT APPROACH

The organizational roles and responsibilities of the key players are summarized below:

Proponent: The project proponent will undertake overall responsibility for compliance with the EMP. Concerned Departments will carry out verification checks to ensure that the contractors are effectively implementing their environmental and social requirements.

Contractors: The contractors will implement the majority of environmental and social mitigation measures. The contractors will carry out field activities as part of the project. The contractors are subject to certain liabilities under the environmental laws of the country, and under its contract with proponent.

26.4 COMPONENTS OF THE EMP

THE EMP CONSISTS OF THE FOLLOWING:

- Management plan
- Monitoring Plan
- Communication and documentation
- Institutional capacity
- Environmental training

26.5 ENVIRONMENT MANAGEMENT PLAN

It lists all the mitigation measures identified in the EIA and the associated environmental or social aspect in line during operational phase with the administrative framework involving all the responsible implementing authorities who are required to take the planned actions/measures. It enhances project benefits by reducing its impacts and making it environmental friendly.

Table 26-1: Environmental Management Plan

Objective	Management Action	Responsibility	Time framework	Residual impact
Construction phase				
Employment Opportunities				
To promote the employment of local persons	Recruitment of local workers will be undertaken without discrimination and in accordance with company recruitment policy by contractors involved in construction	Contractor	On commencement of construction activities	Unemployed people of area will get job opportunities and their standard of living improved
To promote the use of local service providers	Local procurement of goods and services will be undertaken wherever possible and cost effective and where practicable to the project	Contractor	On commencement of construction activities	Indirect job opportunities
Safety during construction				
To ensure safety on construction site	<ul style="list-style-type: none"> • Safety signage will be put in relevant places within the construction site • Site Health and Safety officer is present • Construction drivers are subjected to public safety awareness 	Contractor/Environmental manager/HSE manager	On commencement of construction activities	Safety of workers will be ensured by implementing proposed mitigation measures.

	<ul style="list-style-type: none"> • Reckless driving by construction workers will be prohibited and monitored • Workers will be given PPEs such as; helmets, mask, ear-plugs/muffs, safety boots, etc. and its use will be strictly enforced • Workers will be trained on the regular basis regarding personal safety • Incidents will be reported directly to the concerned authority 			
Construction waste management				
To prevent the contamination of soils and water resources due to inappropriate management and disposal of waste	<ul style="list-style-type: none"> • The construction site will have litter bins for waste collection • Recycling or reuse of waste wherever possible. • Application of a good strategy to collect, remove and safely dispose of waste on daily basis to ensure a clean environment in the factory site 	Contractor	Throughout construction stage	Waste was disposed of/reused/ recycle or resale as per practices of area.

	<ul style="list-style-type: none"> • Integrated waste management system will be adopted for the proper management of the waste at site • All the idle machinery and equipment will be immediately removed from the site • Scrap and the debris will be removed from the site at the end of the construction stage after appropriate segregation of the material • All the domestic waste produce by the worker will be given to the municipal waste management company 			
Pollution control management				
To contain spillages	<ul style="list-style-type: none"> • Proper maintenance of construction vehicles and equipment will be undertaken • Appropriate procedures and protocols will be established and monitored for materials transport and handling whilst on the site. 	Contractor	On-site establishment	Potential for accidental release of materials during transport and handling on the site should be minimized.

	<ul style="list-style-type: none"> • Emergency response plan will be developed for any incident. 			
To manage sewage	Portable toilets will be provided at site.	Contractor	On commencement of construction	Portable toilets will be cleaned properly and regularly
Protection of biodiversity				
To avoid unnecessary disturbance of and quick recovery of biodiversity in the plant site	<ul style="list-style-type: none"> • Minimize clearing of vegetation during construction • Surface soil excavated during construction to be placed back on the sub-soil to fast vegetation recovery • Prepare and implement an appropriate landscaping programme to help in re-vegetation of affected project areas after construction • The flora of the site will be restored at the end of the construction phase by landscaping and planting native vegetation • Defining the route for vehicles and machinery transport, defining the 	Contactore	Throughout construction phase	Although the land is industrial in nature but vegetation loss cannot be avoided, but successful restoration, improvement and long-term management of the surrounding areas and maintenance of planted trees will be provided

	work area, the pathway for the worker area will also be defined and policy will form for the minimum use of outer land during construction.			
Air quality & dust management				
To minimize the dust entrainment during construction	<ul style="list-style-type: none"> • Regular surface wetting will be implemented on dusty sections in the factory construction site • All trucks hauling soil, sand and other loose materials will be covered • No excavation activity will be carried out during windy days • The watering of the route will be done on regular basis • Specified routes will also help to overcome the dust to evolve. • Fuel-efficient and well-maintained haulage trucks will be employed to minimize exhaust emissions 	Contractor	On commencement of construction activities	Dust propagation will be limited to construction area and will not influence local community. However, workers were supplied with dust masks especially on dry days.

	<ul style="list-style-type: none"> • Construction workers will be sensitized on measures to reduce air pollution 			
Noise				
To minimize disturbance due to noise	<ul style="list-style-type: none"> • Residences are at a safe distance from site so no disturbance will be envisaged. • Drivers will be instructed to avoid unnecessary gunning of vehicles, hooting and buzzing. • Regular maintenance of the machinery will be done to reduce the noise • Vehicles will be tuned on regular basis • The inspection of the vehicles will be done by health and safety officer on regular interval 	Contractor	On commencement of construction activities	within PEQs
Occupational health & safety				

<p>To ensure healthy and Secure/safe environment in the construction site for all workers</p>	<ul style="list-style-type: none"> • Management will ensure that fire extinguishers should be located in strategic and visible places • Health and Safety data sheet will be design and formed by Safety officer. • All vehicles and construction equipment will be under control of competent personnel • Inspection of material and harmonization to the occupational health and safety standards. • Adequate security for workers will be provided during construction • Sensitize workers to operate in teams 	<p>Contractor</p>	<p>Throughout construction phase</p>	<p>Record of all incidents will be maintained and reported to HSE manager.</p>
<p>Operation phase</p>				
<p>Wastewater management</p>				
<p>Degradation of surface waters quality due to process water and sewage direct disposal</p>	<ul style="list-style-type: none"> • Process is dry in nature so no process wastewater will be generated 	<p>Xida Mould (Pvt) Ltd</p>	<p>Throughout project life cycle</p>	<p>None</p>

	<ul style="list-style-type: none"> • Domestic solid waste will be treated through septic tanks before final disposal in nearby drain. 			
Air quality management				
Particulate emissions and stack emissions	<ul style="list-style-type: none"> • Electricity will be used as fuel in aluminum furnace • Power Engines will be equipped with air emission control technology. • Monitoring of Ambient air parameters (Particulate matter, SO_x, NO_x) emissions should be carried out on regular basis to ensure compliance with the PEQS. • The inspection and the maintenance of the boiler and generator will be done on regular basis. • Plantation of indigenous trees within the premises and along the boundary. 	Xida Mould (Pvt) Ltd	Throughout operation phase	Local air quality will be virtually unaffected and will be based on PEQs
Noise & vibration				

<p>To minimize disturbance of communities due to noise</p>	<ul style="list-style-type: none"> All the machinery will be installed and operated in a closed hall and from operation of machinery noise will not be a problem for the residents in the area nearby. Further Administration of the unit will take the precautionary measures to avoid the noise emissions. There is no possibility of Noise pollution A thick greenbelt will be developed all around the plant which will be acting as noise barrier. All the workers will be provided with ear plugs. Latest technology will be implanted which has low level of noise. The boiler and power house (closed system) will be planted away from the admin and the work area. 	<p>Xida Mould (Pvt) Ltd</p>	<p>Throughout project life cycle</p>	<p>Noise level will be based on PEQs</p>
<p>Traffic & transport</p>				
<p>Increased heavy vehicles traffic both locally and nationally.</p>	<ul style="list-style-type: none"> Maximize the use of the rail network, when available, for bulk deliveries and abnormal loads. Restricting 	<p>Management of Xida Mould (Pvt) Ltd</p>	<p>Throughout project operation</p>	<p>The traffic has the potential to contribute to congestion and lead to complaints due to</p>

	<p>delivery hours to reduce noise nuisance; avoid heavy truck movements in the night hours will be considered whether deliveries should be scheduled to avoid peak times to reduce congestion</p> <ul style="list-style-type: none"> • Routes for the transport and speed limits will be defined for vehicles and machinery 			<p>noise/vibration nuisance on a local basis. However, the study indicates that there will not be a significant impact.</p>
HSE				
<p>To minimize loss work injury/hazards/incidents/accidents</p>	<ul style="list-style-type: none"> • Training regarding HSE should be given on the regular basis • Workers will be given PPEs such as; helmets, mask, ear-plugs/muffs, safety boots, etc. • Risk assessment will be done on daily basis by HSE officer • Permits and safety data sheets will be filled on regular basis and record will be maintained 	<p>Environmental manager/HSE of Xida Mould (Pvt) Ltd</p>	<p>Throughout life cycle of project</p>	<p>Potential of injuries will be minimized</p>

	<ul style="list-style-type: none"> • It should be strictly enforced to wear PPEs while working • Workers will be trained on the regular basis regarding personal safety and disaster management • Incidents should be reported directly to the concerned authority 			
First aid				
To ensure safety and health	<ul style="list-style-type: none"> • First aid box will be available at the site • First aid training will be given to the employees on the regular basis • Numbers of all the concerned/authorized persons that will be contacted in the case of emergency will be displayed on-site 	Environmental manager/HSE of Xida Mould (Pvt) Ltd	Throughout life cycle of project	None
Fire hazard				
To prevent any disaster	<ul style="list-style-type: none"> • Firefighting equipment including DCP type fire extinguisher, CO2 Type extinguisher, sand buckets, sand 	Environmental manager/HSE	Throughout life cycle of project	Potential of disaster will be minimized by suggested

	<p>drums with spade and hose pipe cabinet will be installed inside the plant</p> <ul style="list-style-type: none"> • All the equipment will be placed at strategic locations where the risk of out-burst of the fire is high. List of fire posts is annexed. • Smoking will not be permitted in the vicinity of the plant • Regular site inspection will be done to eliminate all the chances of the hazards • Checking and maintenance of the fire-fighting equipment will be carried out on the regular basis <p>✓ Emergency evacuation plan is annexed.</p>			mitigation measures implementation
Employment				
To provide job opportunities and helping in improving living standard of people	<ul style="list-style-type: none"> • During this phase, skilled and unskilled labour will be required. • Employment opportunities for the unskilled workers will therefore increase 	Xida Mould (Pvt) Ltd	During construction and operation phase	Direct and indirect jobs

	<p>which will enhance the positive benefits for the local people who are in dire need of income for sustenance.</p> <p>✓ Indirect opportunities for employment will arise from the provision of services to the construction teams, such as sale of raw-material such as cement, bricks, sand etc., as well as food and beverages for the labour and after completion of construction phase serve as a permanent business opportunity.</p>			
--	--	--	--	--

26.6 ENVIRONMENTAL MONITORING PLAN

Environmental monitoring is a vital component of the Environmental Management Plan. It is the mechanism through which the effectiveness of the environmental management Plan in protecting the environment is measured. The feedback provided by the environmental monitoring is instrumental in identifying any problem or lapse in the system under implementation and planning corrective actions.

Table 26-2: Environmental Monitoring Plan

Env. Components	Project Stage	Parameters	Instrument	Standards	Monitoring			Institutional Responsibility
					Location	Frequency	Duration	
Air	Construction	PM ₁₀ , SO ₂ , NO ₂ , CO, SPM ,O ₃	Air Quality Monitors/Gadgets	PEQS	Project site	Twice during construction	As per approved testing method	Contractor through approved monitoring lab
	Operation	Stack emissions	Air Quality Monitors/Gadgets	PEQs	stack	Quarterly	As per approved testing method	Through approved third party/monitoring lab

Noise Levels	Construction	Noise levels on dB(A) scale	Digital Sound Meter	PEQs	Project site	Twice during construction	Reading to be taken at 15 seconds interval for 15 minutes every hour and then averaged	Contractor through approved monitoring lab
	Operation	Noise levels on dB(A) scale	Digital Sound Meter	PEQs	Project site	Quarterly	Reading to be taken at 15 seconds interval for 15 minutes every hour and then averaged	Through approved third party/monitoring lab
Wastewater	Operation	BOD, COD, TSS etc	Through approved equipments	PEQs	ETP	Monthly	As per approved testing method	Through approved third party/monitoring lab

26.7 INSTITUTIONAL CAPACITY OF THE UNIT

The organizational structure for the Environment Management Plan is outlined below:

26.7.1 Primary Responsibilities

The primary responsibility for implementing different aspects of the EMP within the company lies with the concerned departments of Xida Mould (Pvt) Ltd.

26.7.2 Operation Management & Control

Conducting the operational activities in environmentally sound manner will be the responsibility of the concerned Manager; for which he will be trained.

26.7.3 Supervision & Monitoring

Senior Supervisor will be responsible for all environmental issues and for the implementation of EMP.

26.7.4 Communications & Documentation

An effective mechanism to store and communicate environmental information during the project is an essential requirement of an EMP.

26.7.4.1 Meetings

As environment is multidisciplinary subject with environmentalist having a dynamic role therefore In-charge environment would be considered as integral part in both constructional and operational team. Participation of Environmental in-charge in daily morning meeting and any other special meeting is mandatory. Besides internal meeting HSE in-charge/Environment in-charge is also responsible to conduct meeting with local in keeping administration in liaison.

26.7.4.2 Changes-Record Register

A change-record register will be maintained at the site, in order to document any changes in project design. These changes will be handled through the change management mechanism.

26.8 ENVIRONMENTAL TRAINING

Environmental training will help to ensure that the requirements of the EIA and EMP are clearly understood and followed by all project personnel in the course of the project.

Table 26-3: Training Program

Target audience	Trainers	Contents	Schedule
Selected management staff	Contractors	Key finding of mitigation measure	After every five months
All personnel	HSE Officer	Mitigation measures	Monthly
Technical Staff	HSE Officer	Waste disposal or sale out status, vehicle movement restriction and other mitigation measures	After every three month
Other staff	HSE Officer	Waste disposal, resource conservation and other mitigation workers	Monthly

26.9 EQUIPMENT MAINTENANCE DETAILS

The project is about Shoe Moulds manufacturing industry namely “Xida Mould (Pvt) Ltd”. Machines in said unit will be maintained on the regular basis. Following is the maintenance details for the machines and equipments:

Task	Weekly	Monthly	Semi-Annually	Annually
Visual Inspection	✓			
Testing and Inspection		✓		
Maintenance of Machines				
Fire Mains and Nozzles				
Containers/Cylinders				
Control and Section Valves				

26.10 ENVIRONMENTAL BUDGET

Approximately PKR 5 million budget will be reserved for tree plantation, solid waste management, wastewater management and environmental monitoring. Monitoring tests for ambient air quality, noise and groundwater quality will also be conducted.

CHAPTER 8: CONCLUSION AND RECOMMENDATIONS

27.1 CONCLUSION

The report presents Environmental Impact Assessment (EIA) of the said unit. EIA of said Project is performed according to guidelines of EPA. It includes description of the project, description of the environmental baselines, potential environmental impacts and suggested mitigation measures. An implementation mechanism for mitigation measures in the form of an Environmental Management Plan is included in the study.

The performed EIA showed all anticipated impacts (both positive and negative), associated with the project. Appropriate mitigation measures as explained in the environmental study will strengthened the environment and promote sustainable development.

Based on overall assessment of the environmental impact of the project, it is concluded that the economic benefit from the project is not at the cost of environment. From the historical records and vast experience in sustainable development keeping environment as integral part of manufacturing system, Xida Mould (Pvt) Ltd is worthy of Environmental approval. Further the project is not likely to cause any significant adverse impact on the physical and biological environment but positive impact on social development and economic prosperity of the area, provided that suitable mitigation measures as identified in this study are implemented.

It is accordingly recommended that Environmental Approval for the project may be issued by the Punjab Environmental Protection Agency, subject to payment of the requisite scrutiny fee by the proponent of the project.

27.2 RECOMMENDATIONS

The Environmental Impact Assessment study and survey results are finally evaluated to recommend the following:

- Implementation of EMP must be given top priority.
- Proper PPEs including ear plugs, ear muffs, mufflers, goggles, gloves and shoes etc. should be provided to workers

- Train workers to use PPEs
- Advise workers to follow SOPs.
- Equipment maintenance and efficiency must be checked.
- No compromise on public health and environment should be allowed.
- Waste minimization practices should be employed and workers should be encouraged to adopt such methods.
- Wages should be distributed on time.
- Proper tree plantation plan should also be developed in order to make the unit environment friendly.
- Small waste storage bins should be installed at different corner for proper waste collection and discharge.
- Proper dispensary and first aid box should be provided for workers
- Smoking should be avoided within premises of project site and near fuel storage areas.
- The Security Guards shall also be trained to act in case of all possible emergency situations. The fire alarms can be activated to signal evacuation. At the same time, communication shall be made with hospitals, emergency services and police for urgent support.
- The proposed Environmental Management & Monitoring Plan should be implemented.
- The construction and installation should be completed in guidelines of accorded Environmental Approval.