

EXECUTIVE SUMMARY

The printing and packaging industry comprises of companies involved in the protection of content element, allow for the ease of transportation, provide information, add convenience in stocking, marketing, supply and communicating the value of the product, most importantly security of the product to keep it safe to consumer, and finally, environmentally reasonability. They are subject to a variety of laws and regulations that govern the patenting, testing, safety, efficacy and marketing of parinted packaging boxes. In this regard, M/S. Modern Printing and Packaging is aiming to construct a packaging boxes manufacturing plant at 45 km Multan Road Nathy Khalisa, Tehsil Pattoki, District Kasur. Proposed project involves production facilities of packaging products which are used by different industries for the packaging of their products, following will be ensured by the company.

- Quality Assurance / Quality Control:
- Modern Engineering practices:
- Ware House:
- Personnel:
- Standard Operating Procedures:
- Solid waste management

M/s. Modern Printing and Packaging, 45 km Multan Road Nathy Khalisa, Tehsil Pattoki, District Kasur. The project site/unit is situated at agriculture cum an industrial land.

According to section-12 of PEPA-1997 (Amended, 2012) Environmental Approval/NOC is a mandatory provision.

The said Environmental Impact Assessment Study will cover the sections-12 for Environmental Approval Punjab Environmental Protection Act, Amended 2012. Furthermore, the study provides relevant information, as required under the officially approved format, to help the decision makers i.e. EPA Punjab before issuing the Environmental Approval.

The main objectives of this Environmental Impact Assessment (EIA) Report are to identify the baseline environmental, biophysical and socio-economic conditions, to examine project alternatives including alternate sites, and to study the potential impacts along with formulation of suitable mitigation measures for an environment friendly implementation of the proposed project site and around the project area.

Table 1: Salient Features of the Project

1.	Project Title	Modern Printing and Packaging
2.	Project Location	45 km Multan Road Nathy Khalisa, Tehsil Pattoki, District Kasur.
3.	Proponent	Syed Muhammad Raza Jilani S/O Syed Abdul Razaq Jilani R/O: House no. 90, sector B, ghauri block bahria town, Lahore CNIC: 36302-4229390-1
4.	Consultant	EnvironTech Consultants (Pvt) Ltd.
5.	Total Area	12 Kinal 18 Marla
6.	Capacity of Project	boxes 50,000/Day
7.	Location of project	31°13'14.1"N 73°59'15.9"E
8.	Nature of Area	Agricultural cum Industrial
9.	Present status of Land Use	Open/Vacant plot
10.	Land use in the surroundings of project site. North South East West	The project is located in agricultural area. The surroundings are: Open/Vacant land Road Open/Vacant Land Mosque
11.	Cost of Project	PKR 18 million
12.	Raw material	Kraft Paper Rolls, Cornstarch Glue
13.	Product	Packaging Printed Boxes
14.	Purpose of proposed project	Manufacturing of packaging printed boxes

15.	Nearby emergency services i.e. Hospital, police station, rescue, fire brigade etc.	DHQ Hospital Kasur (77 Km) Rescue 1122 Kasur (59.2 Km). Police Station Larri Adda (56 Km)
16.	Tree Planation	At Designated Green Areas
17.	Water Source	Ground Water
18.	Status of Project	Open/Vacant Land
19.	Source of Power	WAPDA (LESCO)

1.0 Project Description

The proposed project will involve the manufacturing of the quality packaging and printing boxes, that are based on the layers of kraft paper will be crimped and glued to form corrugated cardboard, which will be then cut, printed, folded, and glued to make boxes. Proposed project will be constructed on an area of 12 Kanal-18 Marla. Total capacity of the plant will be estimatedly 500,000boxes/Day.

The salient features of proposed unit are as under:

- Imported latest art of technology plant/machinery which incorporates the requirements of PEQS rather the plant based on International Standards which are more stringent as compared to standards of Punjab.
- Quality Assurance/Quality Control Department
- Research & Development Department
- Water System
- Air Handling System
- Ware House
- Standard Operating Procedure
- Central fire hydrant system, fire alarm systems, Smoke detectors, fire extinguishers are placed.

- Emergency assembling points are mentioned in the factory and the workers are trained to cope with any emergency situation.
- Ornamental plants/trees are grown up, grassy lawns have been developed at open place.
- The stand by generators will be latest art of technology and well-tuned within time. Silencer and sound proof canopies are also installed.

2.0 Impacts and Recommended Mitigation Measures

In order to identify all the impacts associated with the project during construction and operational activity with potential to cause adverse environmental impacts, a thorough review has been conducted. Although, there is very low chances of any adverse impact occurrence on the surrounding environment. However, in case of impact arises from the project activity possible necessary measures will be adopted to control the same. Overall the project has positive social impacts specifically on the local population and generally contributes in Pakistan's GDP. The project may have some adverse environmental impacts of minor to moderate magnitude which will be controlled through mitigation measures proposed in Environmental Management and Monitoring Plan (EMMP). Moreover, there is no tree present on site, few patches of bushes and grass are present, and restoration and reclamation will be carried out by the plantation of native species in specified green areas. Environmental impacts have been identified and mitigation measures are recommended within the Project Area of Influence. The major impacts on physical, biological and social environments are described as under:

Table 2: Impact Summary

Environmental Parameters	Impact Assessment during Different Phases	
	Construction	Operational
A: Physical		
Land Resources		

Soil Erosion and Contamination	-2p	0
Transportation	-1t	-1t
Solid Waste and By-Products	-2t	-2p
Land Use	-2p	NA
Air Resources		
Noise Pollution	-1t	-1t
Air Emission	-1t	-1t
Dust	-1t	-1t
Odor	NA	-2t
Water Resources		
Ground Water	-1p	-1p
Surface Water	NA	NA
Wastewater	-1p	-2p
B: Ecological		
Flora		
Tree Cutting	-1p	+1p
Fauna		
Terrestrial Fauna	-1p	+1p
C: Socio-Economic		

Employment Opportunities	+1t	+1p
Land Value Appreciation	+1t	+2t
D: Hazards		
Biological Hazards	NA	NA
Physical Hazards	-1t	-1p
Chemical Hazards	0	-1p
Health and Safety	-1t	-1p
<i>Legends: 1= Low; 2= Medium; 3= High; 4= Extremely High; NA= Not Applicable; t= Temporary; p= Permanent; app= Applicable; 0= Negligible</i>		

3.0 Environmental and Social Monitoring Plan

Environmental Management and Monitoring Plan (EMMP) were developed for effective implementation of the recommended mitigation measures. The EMMP includes check and balance to control and minimize the identified impacts and monitoring programs to oversee residual impacts, if any, during the operational phase. The EMMP describes procedures to be followed throughout the construction and operation of the project. It also identifies the roles and responsibilities of all concerned personnel, including the persons reporting during the different project phases. Mitigations for physical, biological and socio-economic parameters will be measured to determine compliance with standards established in EMMP. The Monitoring Plan will record the inputs provided by various participants in the environmental and social management process. It will also check whether the prescribed national and provincial guidelines and plans are being followed and that the required mitigation measures and activities are being accomplished in time.

4.0 Monitoring Plans

During operational phase, monitoring is required to be carried out at least once in a month during rainy season to check the soil contamination and surface water

EnvironTech Consultants (Pvt) Ltd.

Office no. 11, Second Floor, Centre Point Plaza, Main Boulevard, Gulberg, Lahore
Contact +92-303-4342302

level/condition. Moreover, periodic monitoring should also be carried out regarding ambient air quality, noise and dust level and worker safety. A detailed site monitoring plan has been developed and given in Chapter-7 of this EIA Report.

5.0 Conclusion

The findings of EIA Report showed that although the pharmaceutical manufacturing unit is expected to have significant minor to moderate negative impacts on the environment during the construction and operational phases, but the severity of these adverse impacts can be reduced significantly by adopting EMMP with true spirit as proposed in the Chapter 7 of this EIA Report. The impacts were assessed by frequent site visits, studying related projects and by reviewing the documents. Generally, the project is planned to follow efficient environmental management systems. Specific environmental and social benefits have been mentioned below which depend on the proper application of mitigation measures suggested in EMMP and best engineering practices.

6.0 Recommendations

The intensity and severity of impacts occurred due to the processing varies with change in the nature and magnitude of the project as well as depends upon the baseline environmental conditions of the area. The mitigation measures will require constant information flow and consultation with the stakeholders to ensure the least adverse social-economic impact to outweigh the “no project development” scenario.

- ⊙ The adverse environmental impacts can be reduced significantly by adopting best management and monitoring practices as well as by implementation EMMP with true spirit
- ⊙ Proper PPEs including gloves, face masks, head gear etc. will be provided
- ⊙ No compromise on public health and environment should be allowed
- ⊙ Waste minimization practices should be introduced to workers by conducting lectures on spot to aware the workers about the long-term benefits of the same in lieu of surrounding environment

- ⊙ A proper tree plantation plan should also be developed in order to make the process environment friendly
- ⊙ Small domestic waste storage bins should be placed at different locations for proper collection and disposal of the solid waste
- ⊙ It is recommended that the Proponent should obtain an Environmental Approval (NOC) from the Punjab-EPA before proceeding further.

Contents

EXECUTIVE SUMMARY	1
1. INTRODUCTION	18
1.1 Project Background	18
1.2 Project Nature and Size	19
1.2 Project Location.....	19
1.4 Regulatory Compliance	20
1.5 The Proponent	21
1.6 Scope of Project	21
1.7 Details of Consultant.....	22
1.8 Purpose of Report	23
2. SCREENING AND SCOPING	25
2.1 Screening/Type and Category of Project	25
2.2 Scoping:	25
2.3 Alternatives	27
Site Alternatives	27
Project Alternatives	27
Environmental Alternatives:	28
Economic Alternatives:	28
3. DESCRIPTION OF PROJECT	29
3.1 Objectives of Project	29
3.2 Location and Layout of Project	29
3.3 Land Use on Site:	30
3.4 Road Access	30
3.5 Vegetative Features	30
3.6 Amenities	31

3.6.1	Electricity.....	31
3.6.2	Ground Water Resource	31
3.7	Management Plans.....	31
3.7.1	Air Emissions	31
3.7.2	Wastewater Management and Disposal	33
3.7.3	Waste Management	34
3.8	Staff/Manpower	35
3.9	Emergency Preparedness	35
3.9.1	Safety Trainings.....	36
3.9.2		36
3.9.3		36
3.10	Cost and Magnitude of Operation	36
3.11	Land ownership Documents.....	37
3.12	Schedule of implementation	37
3.13	Process Description.....	38
3.13.1	Basic Raw Materials Required by the Proposed Unit.....	38
3.14	Manufacturing Process of finished product	38
3.14.1	Corrugator.....	38
3.15	Relocation and Rehabilitation Plan	40
5.	DESCRIPTION OF THE ENVIRONMENT	41
4.1	Methodology.....	41
4.1.1	Data Collection	41
4.1.2	Social Survey	41
4.1.3	Sampling Design	42
4.1.4	Questionnaires.....	42
4.1.5	Data Editing and Analysis	42

4.2	Review of Legal and Administrative Framework	42
4.3	Baseline Conditions	43
4.4	Physical Environment	43
4.4.1	Topography	44
4.7.2	<i>Hydrology</i>	44
4.7.3	<i>Seismicity</i>	44
4.7.4	<i>Geography</i>	45
4.7.5	<i>Climate</i>	45
4.7.6	<i>Wind</i>	47
4.8	Ecological Environment	48
4.8.1	<i>Aquatic Flora & Fauna</i>	48
4.8.2	<i>Flora</i>	48
4.8.3	<i>Fauna</i>	49
4.8.4	<i>Ambient Air Quality</i>	52
4.8.5	<i>Noise</i>	53
4.8.6	<i>Water Resource</i>	53
4.9	Socio-Economic Resources	54
4.10	Socio-Economic Profile of Study Area	54
4.10.1	<i>Study Area Profile</i>	54
4.11	Demographic Profile	56
4.11.1	<i>Health Facilities</i>	57
4.11.2	<i>Educational Facilities</i>	57
4.11.4	<i>Demographic Characteristics of the Population</i>	57
4.11.5	<i>Family Size</i>	57
4.11.6	<i>Age Groups</i>	57
4.11.7	<i>Occupation of Respondents</i>	58

4.11.8	<i>Literacy Rate</i>	58
4.11.9	<i>Common Diseases</i>	59
4.11.10	<i>Cultural, Religious & Other Structures</i>	59
4.12	Lab Reports of Environmental Analysis	59
4.13	Suitability of Site:	59
6.	PUBLIC CONSULTATION AND INFORMATION DISCLOSURE	60
5.1	Proponent's Environment Management Team.....	60
5.2	The Responsible Authority	63
5.3	Objectives of Consultation	63
5.4	Identification of Stakeholders	64
5.4.1	Direct Stakeholders	64
5.4.2	Indirect Stakeholders.....	64
5.4.3	Other Departments and Agencies.....	65
5.5	Public Disclosure	65
5.6	Consultation Process.....	65
5.7	Environmental Practitioners and Experts.....	66
5.8	Affected and Wider Community.....	66
5.8.1	Views, Concerns and Suggestions of Various Stakeholders.....	67
5.8.2	Addressing Public Concerns	68
5.9	Acceptance Level of the Project.....	68
7.	POTENTIAL ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES	69
6.1	General.....	69
6.1.1	What is the problem?.....	69
6.1.2	When problem will occur and when it should be addressed?	70
6.1.3	Where problem should be addressed?.....	70

6.1.4	How the problem should be addressed?	70
6.2	Ways of Achieving Mitigation Measures?	70
6.2.1	Changing in Planning Design.....	70
6.2.2	Improved Management and Monitoring Practices	71
6.2.3	Replacement/Relocation/Rehabilitation.....	71
6.3	Impact Assessment Methodology	71
6.3.1	Screening of Potential Impacts	71
6.3.2	Identification of Mitigation Measures	71
6.4	Impact Evaluation.....	72
6.4.1	Methodology for Impact Evaluation.....	72
6.5	Impacts Associated with Project Location.....	77
6.6	Design Related Impacts.....	78
6.6.1	Changes in Land value	78
6.6.2	Seismic Hazard.....	78
6.6.3	Emergency response.....	79
6.7	Impacts During Construction Stage	79
6.7.1	Change in land use	79
6.7.2	Impacts on Topography	80
6.7.3	Impacts on Soils.....	80
6.7.4	Impacts on Surface and Ground water	80
6.7.5	Impacts on Air Quality	80
6.7.6	Water Consumption	81
6.7.7	Health and Safety of Workers.....	81
6.7.8	Impacts on flora.....	82
6.7.9	Impacts on Fauna	82
6.7.10	Change of Land Appearance/layout.....	82

6.7.11	Employment Generation	83
6.8	IMPACTS DURING OPERATIONAL STAGE	83
6.8.1	Impacts on Climate.....	83
6.8.2	Employment Generation	83
6.8.3	Air Quality	83
6.8.4	Vapor/Fumes in Production Hall.....	84
6.8.5	Water Consumption	84
6.8.6	Wastewater Generation	85
6.8.7	Solvent Liquid Waste Generation.....	85
6.8.8	Solid Waste Generation	85
6.8.9	Health and Safety of Workers.....	86
6.8.10	Emergency Response.....	87
6.9	POTENTIAL ENVIRONMENTAL ENHANCEMENT MEASURES	88
6.9.1	Tree Plantation	88
6.9.2	Facility Design.....	88
6.9.3	Social Enhancement Measures.....	88
8.	ENVIRONMENTAL MANAGEMENT AND MONITORING PLANS	90
7.1	Objectives.....	90
7.2	Management Approach	91
7.2.1	Proponent.....	91
7.2.2	Contractors.....	91
7.3	Components of EMMP.....	91
7.3.1	Remedial and Mitigation Measures	91
7.4	Environmental Management and Monitoring Framework	92
7.4.1	Institutional Arrangements and Responsibilities.....	103

7.4.2	Proposed Monitoring Program to Assess Performance or Output of EMP	105
7.5	Proposed EMP Reporting and Reviewing Procedures	130
7.5.1	Meetings.....	130
7.5.2	Changes-Record Register.....	130
7.6	Impacts and their Mitigation Summary	130
7.7	Equipment Maintenance Details	132
7.8	Environmental Budget	132
9.	CONCLUSION AND RECOMMENDATIONS.....	134
8.1	Merits and Demerits	134
8.2	Recommendations.....	135

LIST OF TABLES

Table 1: Salient Features of the Project.....	2
Table 2: Impact Summary	4
Table 3: Details of Proponent	21
Table 4: Consultant Details.....	22
Table 5: List of Experts	22
Table 6: Vegetative Features of the Project Area	30
Table 7: Specification of Cyclone	32
Table 8: Details of the Officers	35
Table 9: Flora of the Study Site	49
Table 10: Mammals in Study Area.....	50
Table 11: Birds in Study Area	50
Table 12: Reptiles in the Study Area	51
Table 13: Amphibians in the Study Area.....	51
Table 14: Insects in Study Area.....	51
Table 15: Study Area Profile	54
Table 16: Impact Screening Checklist.....	74
Table 17: Impact Evaluation Matrix.....	76
Table 18: Environmental Management Plan.....	93
Table 19: Roles and Responsibilities	103
Table 20: Environmental Monitoring and Management Plan.....	107
Table 21: Impacts Summary of Modern Printing and Packaging	130
Table 22: Schedule for Implementation of Environmental Budget	133

LIST OF FIGURES

Figure 1-1: Project Site.....	19
Figure 1-2: Paper packaging import in Pakistan (CY16-CY20)	21
Figure 1-3: Paper & Board Production (FY16-FY20)	22
Figure 3-1: Proposed project site	29
Figure 3-2: Road Access Map	30
Figure 3-3: Cyclone for Air Emission Control.....	32
Figure 3-4: Design of Cyclone	33
Figure 3-5: Design for Septic Tank	34
Figure 3-6: corrugated cardboard	39
Figure 3-7: Cutted Packaging Boxes	40
Figure 3-8: Printed packaging boxes	40
Figure 5-1: Seismic Zoning Map of Pakistan	45
Figure 5-2: Average Annual Temperatures and precipitation in Kasur	46
Figure 5-3: Maximum temperature ranges in Kasur	46
Figure 5-4: Annual Precipitation amounts in Kasur	47
Figure 5-5: Annual average wind speed in Kasur	47
Figure 5-6: Wind Rose diagram of Kasur	48
Figure 5-7: Consulted age groups in the area near project site	58
Figure 5-8: Occupation of Respondents	58
Figure 5-9: Literacy Rate	59
Figure 7-1: Impact Assessment Hierarchy.....	72

1. INTRODUCTION

1.1 Project Background

The printing and packaging industry comprises of companies involved in the protection of content element, allow for the ease of transportation, provide information, add convenience in stocking, marketing, supply and communicating the value of the product, most importantly security of the product to keep it safe to consumer, and finally, environmentally reasonability. The In past, existing time and foreseeable future printing and packaging industry will continue to play a central role in all facets of global economy by protecting the carrying content from all possible affecting factors i.e., light, moisture microbes, chemicals and environmental elements sustaining economy. No matter how simple or complex, packaging shapes and printed logos are it is the way consumer interact with brands, their products and se Corrugated cardboard is a stiff, strong, and light-weight material made up of three layers of brown kraft paper. From the paper mill, rolls of kraft paper are transported to a corrugating, or converting, plant. At the plant, layers of kraft paper are crimped and glued to form corrugated cardboard, which is then cut, printed, folded, and glued to make boxes.

Kraft paper has been manufactured since 1906. Since then, pulp processing, paper making, and corrugating operations have been developed to a high state of efficiency and productivity. Today, in the corrugated cardboard industry, designers are creating innovative containers that require four-color printing and complex die-cutting. These innovative containers are designed with sophisticated software such as computer-aided design (CAD) programs, allowing a packaging designer to brainstorm different package designs before manufacturing begins. A designer using a CAD program can call up and modify different designs that have been stored in a computer design library. Thus, existing packages can generate new designs. Many retail stores use such light, strong, and colorful containers directly, as point-of-purchase displays.

Most items at your favorite supermarket, discount store, or shopping mall were safely delivered in boxes made of corrugated cardboard, and many are displayed in the same boxes, which were manufactured so they could be opened and used for this purpose. Because corrugated cardboard is such a versatile packaging material, millions of tons

are used each year to protect and display products. During 1992, more than 25 million tons of corrugated cardboard were produced in the United States. According to current analysis the estimated market size of the global packaging industry stood at USD~917bln in 2019 (2018: USD~891bln). The industry is expected to witness a growth in 2020-2021 of ~10% partially attributable to the greater demand partially due to Covid-19, consumer lifestyle and adoption of e-commerce.

1.2 Project Nature and Size

The proposed project will involve the manufacturing of the quality packaging and printing boxes, that are based on the layers of kraft paper will be crimped and glued to form corrugated cardboard, which will be then cut, printed, folded, and glued to make boxes. Proposed project will be constructed on an area of 12 Kanal-18 Marla. Total capacity of the plant will be estimatedly 500,000boxes/Day.

1.2 Project Location

The proposed location for the installation of proposed project of Modern printing and packaging is at 45-km Multan Road Nathy Khalisa, Tehsil Pattoki, District Kasur, Pakistan. The geographical location of the proposed area is 31°13'14.1"N 73°59'15.9"E.

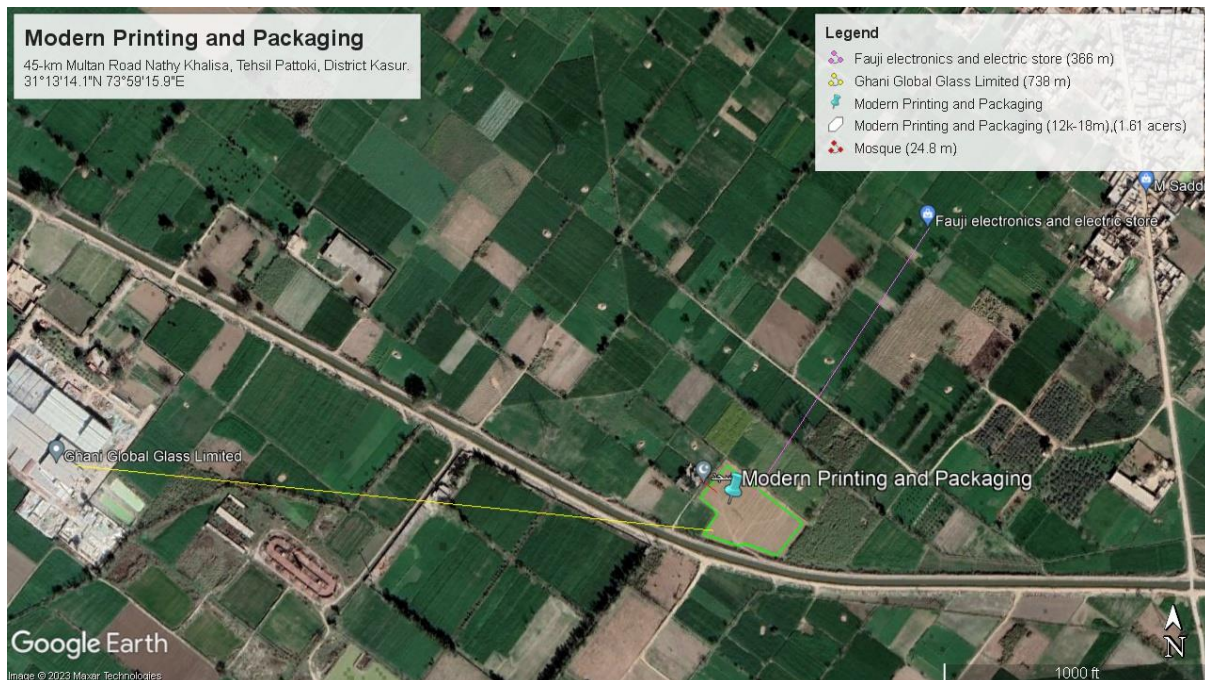


Figure 1-1: Project Site

There is no environmental sensitive, ecologically important features or socially significant infrastructures with in the project area periphery present in the study area. No ecology sensitive receptor such as; forest or reserved area is present within 5 km vicinity that could be impacted due to the installation and operation of the proposed project.

There are no particular sensitive areas as project is located far from populated areas.

1.4 Regulatory Compliance

As per IEE/EIA Regulations 2022, it is mandatory for the proponent of any development project to obtain Environmental Approval (NOC) from EPA by filing an IEE or EIA as the case may be. The said project is proposed by the proponent to meet the ever-increasing demand of packaging material for multiple industries in Pakistan. For this purpose, the proponent has decided to engage environmental consultants, M/S Central Environmental Services and EnvironTech Consultants to prepare EIA Report. The purpose of this study is to identify the environmental and social baseline of the project and study area i.e., physical, biological, socio-economic, cultural changes and to assess all possible impacts anticipated during the installation and operation phases of the proposed project with the aim to find out appropriate mitigation measures to either eliminate those impacts or to bring them to acceptable level as well as to formulate Environmental Management and Monitoring Plan (EMMP) for implementation in sustainable manner. This EIA Report provides relevant information as required under the officially approved format, to help the decision makers i.e., EPA Punjab before issuing for the Environmental Approval.

Following rules, regulations and acts are considered for the commencement of the proposed project:

- a) Pakistan Environmental Protection Act (PEPA), 1997 & Punjab Environmental Protection Act (PEPA), 1997 (amended 2012)
- b) Pakistan Environmental Protection Agency Regulations, 2022 for review of IEE and EIA.
- c) Pakistan Environmental Impact Assessment procedures, 2022.
- d) Guidelines for Preparation and Review of Environmental Reports

EnvironTech Consultants (Pvt) Ltd.

Office no. 11, Second Floor, Centre Point Plaza, Main Boulevard, Gulberg, Lahore
Contact +92-303-4342302

1.5 The Proponent

The details of the proponent of the proposed project are given below:

Table 3: Details of Proponent

1.	Name	Syed Muhammad Raza Jilani S/O Syed Abdul Razaq Jilani
2.	Company	Modern Printing and Packaging.
3.	Address	House no. 90, sector B, ghauri block bahria town, Lahore.

1.6 Scope of Project

Pakistan's packaging industry has an approximate size of USD~5.53bln (PKR~897bln) in FY20 as compared to USD~5bln (PKR~750bln) in FY19. With Paper and plastic segments occupy the major share in total market. The imports of paper and board packaging products has grown consistently since CY16 with a CAGR of ~10%. During CY19, the imports stood at USD~14mln (PKR~2,172mln) as compared to USD~12mln (PKR~1,407mln) in CY18 as shown in figure below;

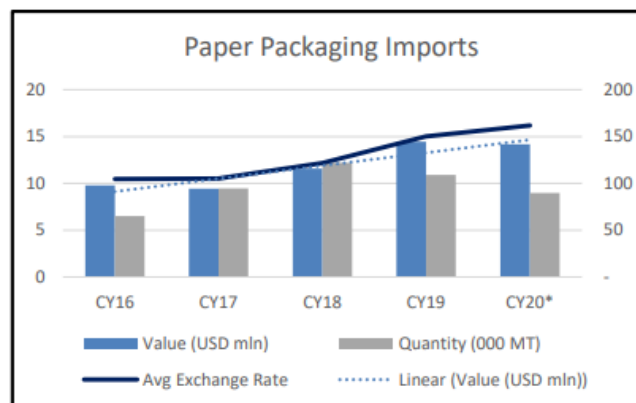


Figure 1-2: Paper packaging import in Pakistan (CY16-CY20)

The paper packaging segment has remained relatively stable in recent years. Despite the economic slowdown caused by the COVID-19 pandemic, demand for the segment remained relatively consistent as it falls in the supply chain of various essential products and industries. The graph below shows production levels of paper and board for the last five years which have experienced a CAGR of ~3% in the period. Moreover, consistent levels of production can be observed since FY18. This reflects on

the stability of paper packaging segment as it makes up a significant portion of overall paper and board production.

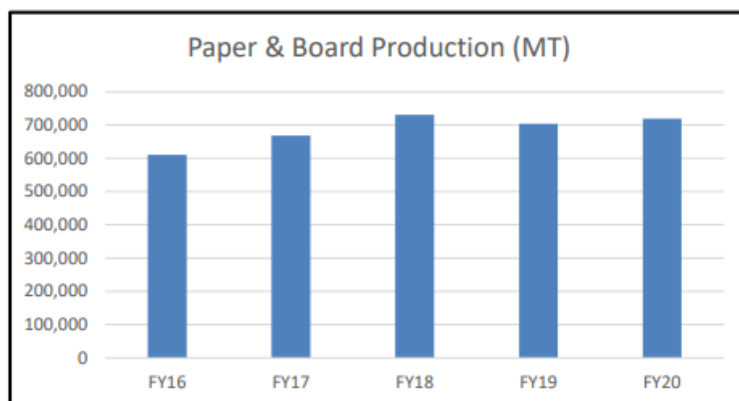


Figure 1-3: Paper & Board Production (FY16-FY20)

1.7 Details of Consultant

The proponent of the **Modern Printing and Packaging** has engaged **EnvironTech Pvt Ltd.** to carry out the EIA Study for the installation and operation of aforesaid project in accordance with Punjab-EPA guidelines. This will be a joint venture of both the companies. For this purpose, the company engaged the group of professionals which comprises of environmental specialists and social scientists. The details of the consultant are given below:

Table 4: Consultant Details

Sr#	Consultant Details	
1	Consultant	<i>EnvironTech Consultants (Pvt) Ltd.</i>
2	Address	Office no.11 (2 nd floor) Centre point Plaza, Main Boulevard Lahore.
3	Contact No.	0303-4342302
Focal Person		
4	Name	Kamal Ahmed Cheema (C.E.O)

To prepare EIA Report of the respective project the company engaged the following experts. The details of the experts are given below:

Table 5: List of Experts

<i>Name of expert</i>	<i>Position held</i>	<i>Highest Qualification</i>
Dr. Mateen Shafqat	Chief Advisor	PhD Environmental Sciences, PMAS, Arid Agriculture University
Kamal Ahmed Cheema	Chief Environmentalist	M. Phil. Environmental Economics, PIDE, Islamabad
Mr. Shahzaib Ahmed	Social Scientist	M. Phil Development Studies, PIDE, Islamabad.
Arslan Iqbal	Environmentalist	M. Phil Environment Sciences, The University of Lahore BS Environmental Sciences The University of Lahore
Jawad Shafiq	Environmentalist	BS Environmental Sciences University of Gujrat
Amna Hafeez	Environmentalist	M.Sc. Mountain Conservation and Watershed Management, University of the Punjab, Lahore
Rahma Butt	Environmentalist	M.Phil. Environmental Science, U.E.T Lahore.
Saba Nazir	Environmentalist	M.Phil. Environmental Science, UOL Lahore.
Abeesha	Environmentalist	M.Phil. Environmental Science, The University of Punjab, Lahore.

1.8 Purpose of Report

The main objectives of this EIA Study were:

- ✎ To determine and record the state of the environment of the project area to establish a baseline in order to assess the suitability of the project in that proposed area

EnvironTech Consultants (Pvt) Ltd.

Office no. 11, Second Floor, Centre Point Plaza, Main Boulevard, Gulberg, Lahore
Contact +92-303-4342302

- ↳ To identify pre-construction/ design, construction and operation activities and to assess their impacts on environment
- ↳ Provide assistance to the proponent for planning, designing and implementing the project in a way that would eliminate or minimize the negative impact on the biophysical and socio-economic environment and maximizing the benefits to all parties in the cost-effective manner
- ↳ To present mitigation and monitoring plan for smooth implementation of the suggested mitigation measures and supervise their efficiency and effectiveness
- ↳ To provide opportunity to the public for understanding the project and its impacts on the community and their environment in the context of sustainable development
- ↳ Prepare an EIA Report for submission to the EPA, Punjab for Environmental Approval (NOC)

2. SCREENING AND SCOPING

2.1 Screening/Type and Category of Project

Section 12 of Punjab Environmental Protection Act, 1997 (amended 2012) states “No proponent of a project shall commence construction or operation unless he has filed with the Government Agency designated by Federal Environmental Protection Agency or Provincial Environmental Protection Agencies, as the case may be, or, where the project is likely to cause an adverse environmental effects an Environmental Impact Assessment (EIA), and has obtained from the Government Agency approval in respect thereof.” Punjab Environmental Protection Act provided the guidelines for categorizing the projects. According to **Schedule-II** of IEE and EIA Regulations, 2022; the proposed project falls under **Category B (Manufacturing and Processing)** i.e., the project requires an EIA Study. Thus, an EIA Report is being prepared and submitted accordingly for approval.

2.2 Scoping:

1. Spatial and Temporal Boundaries of Environmental Assessment:

Temporal and spatial boundaries for the effects assessment are defined by the characteristics of the project and the VECC being assessed. These boundaries encompass time periods and areas during and within which the VECCs are likely to interact with or be influenced by the project.

- Temporal Extent (during construction and operation)
- Spatial Extent (local or widespread)

2. Views, Concerns and Suggestions of Various Stakeholders

Community showed a lot of concerns; a few are being mentioned here:

- ✚ Removal of shrubs and trees should be avoided to the extent possible
- ✚ The project will become the source of income for local to earn their livelihood easily and honorably
- ✚ The area will become further industrialized
- ✚ For the solid waste management and waste disposal, proper disposal techniques should be adopted

- ✚ Employment opportunities will be generated, and locals should be hired on the priority basis
- ✚ The air pollution is one of the major impacts of the proposed project, so ambient air quality should be monitored regularly
- ✚ Water spraying/sprinkling should be done on the regular basis during construction phase to avoid dust emissions
- ✚ Removal of shrubs and trees should be avoided to the extent possible
- ✚ Good relations with the local communities will be promoted by encouraging Contractor to provide opportunities for skilled and unskilled employment to the locals as well as on-job training
- ✚ The contractor should prefer hiring local labor from adjacent nearby villages
- ✚ Indigenous trees around the facility should be planted to control air pollution and as the compensation
- ✚ Noise reducing barriers should be installed to reduce noise pollution as the nearest community lies within the radius of 0.8 km

Concerns

- ❖ Workers should be hired from local community
- ❖ Proper disposal of solid waste should be practiced
- ❖ Proper disposal of wastewater should be practiced
- ❖ Indigenous trees around the facility should be planted to control air pollution
- ❖ Removal of shrubs and bushes should be avoided to the extent possible

3. Significant impacts and factors to be determined

The proposed project is of manufacturing of Modern printing and packaging. The nature of the land is agriculture cum industrial and current status of land is open land having no vegetation. The study area is fertile, leveled land. In addition, to the noise and fugitive dust emissions during the development phase solid waste management and disposal issues may arise along with wastewater disposal issues. There are few minor impacts associated with the operation of manufacturing unit includes the

management of the municipal solid waste generated during the, raw-material storage which will be managed according to local practices of area.

The impacts from the establishment of the Modern printing and packaging will not occur during the construction and operation due to the safe distance of the project from residential area.

2.3 Alternatives

The details of the site alternatives and technology alternatives are discussed below:

Site Alternatives

No other site alternative was available to be considered as feasible option for the installation of the plant as the land is owned by the proponent. The proposed site was selected because of the following reasons;

- 1) The site is at the safe distance from the nearest residential area.
- 2) The site is well connected to the other parts of the city through Multan Road.
- 3) No human settlements displacement or relocation associated with the project development and operation.
- 4) Operation of the proposed processing unit in the respective zone will provide job opportunities to local people and will improve their socio-economic status of the study area as 10 employees will be hired during the operational phase

Project Alternatives.

Although Pakistan's printing and packaging sectors are expanding and evolving rapidly with e-commerce and online business, it acts as a backbone for the rest of the industries and in order to maximize benefits form packaging manufacturers it is required to encourage its production. Clearly this project presents an opportunity, but much more work needs to be done by the government and industry's stakeholders.

Printing and packaging companies are facing challenges with developing new styles and meeting the complex demands of clients. Unprecedented challenges in the packaging companies are raising concerns about innovations that increase R&D, administrative and sales cost. Some of the challenges include:

- Sustainability
- Product Protection
- Recognition
- Distribution
- Impression

The Pakistan printing and packaging companies are success story, providing high quality packaging boxes at affordable prices to Millions.

As the proposed project is need of time so no project alternative is considered by the proponent.

Environmental Alternatives:

No important religious, archaeological, recreational site or ecologically/declared protected area and human settlement exists within proximity of the selected site i.e., within 5 Km which is a safe distance. In view of these facts, it can be concluded that the selected site is best suited for the project and will not pose any adverse impact or threat on any component of the environment.

Economic Alternatives:

The industry is relatively young in the international markets with the total turnover of the industry is Rs425 billion annually, and with the printing and packaging industry adding value of 35% to 40% it takes overall turnover to around Rs595 billion per annum. Pakistan's packaging industry has an approximate size of USD~5.53bln (PKR~897bln) in FY20 as compared to USD~5bln (PKR~750bln) in FY19. The imports of paper and board packaging products has grown consistently since CY16 with a CAGR of ~10%.

The Pakistan printing and packaging industry is focusing on increasing exports. In the meantime, exports are also likely to be boosted by new regional and global opportunities. In the light of above facts, there is a need to encourage local market development, which are also economical to Country mates.

3. DESCRIPTION OF PROJECT

This section of the study concentrates on details of the project and its salient features; such as its location, site layout, objectives, selection of alternative sites and technology, cost and magnitude of operation at various phases and process employed for the processing of the proposed project.

3.1 Objectives of Project

The main objectives of the proposed project are as under: -

- Protection of the product adequately protect from the wide range mechanical, manual and environmental hazards it will encounter through on its distribution journey.
- Containment at its highest level, because of encompassing large variety of the products. The design should ensure minimal in-transit damage.
- Printing of the packaging must serve as a high degree of communication with direct or indirect marketing.

3.2 Location and Layout of Project

4. The proposed location for the installation of proposed project of the Modern printing and packaging is 45-km Multan Road Nathy Khalisa, Tehsil Pattoki, District Kasur. The geographical location of the proposed area is 31°13'14.1"N 73°59'15.9"E



Figure 3-1: Proposed project site

3.3 Land Use on Site:

The surface land in and around the project area is leveled and fertile, agriculture cum industrial in nature. No ecology sensitive receptor such as; forest or reserved area is present within 5 km vicinity that could be impacted due to the installation and operation of the aforesaid project.

3.4 Road Access

The project site is linked with Multan road.

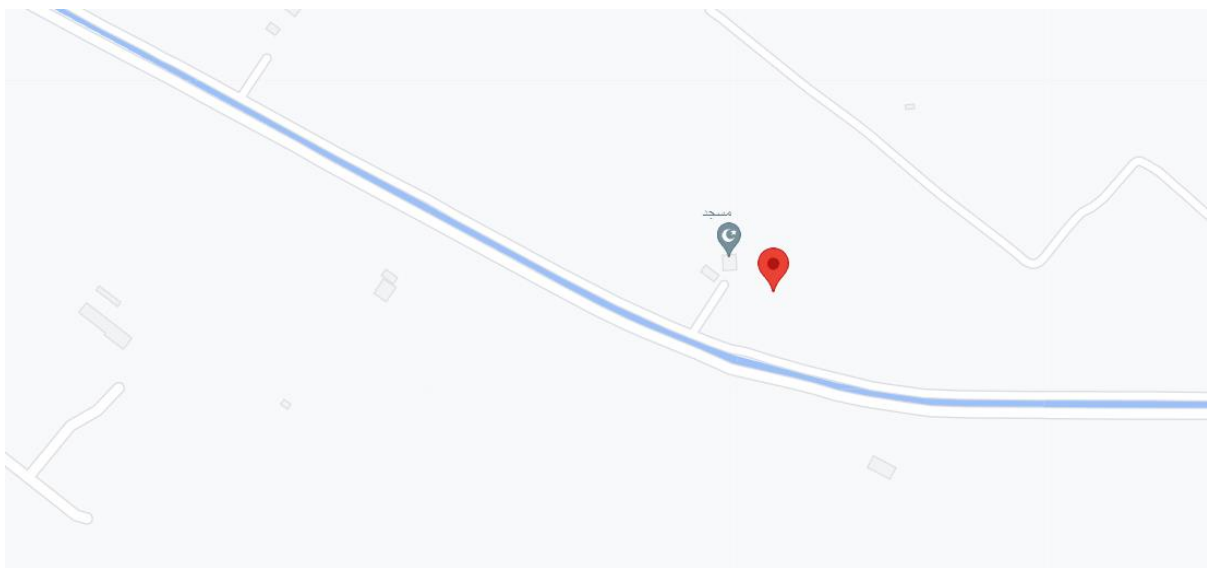


Figure 3-2: Road Access Map

3.5 Vegetative Features

The area around the project area is Industrial. The main crops grown around the project area includes; rice, sugarcane and maize whereas, the vegetative features of the area include; safeda, bari, neem and kikar.

Table 6: Vegetative Features of the Project Area

Sr.#	Local Name	Type	Biological Name
1	Kikar	Throne Tree	<i>Prosopis juliflora</i>
2	Safeda	Tree	<i>Eucalyptus</i>
3	Sheesham	Tree	<i>Dalbergia sissoo</i>

4	Peepal	<i>Tropical Tree</i>	<i>Ficus religiosa</i>
5	Wild Grasses	<i>Grass</i>	--

3.6 Amenities

The following social amenities are present at site and the management of the waste (solid waste and effluents) is explained in sub-sections below:

3.6.1 Electricity

Electricity will be purchased from WAPDA(LESCO).

3.6.2 Ground Water Resource

For construction stage the ground water will be used. About average 94-meter cube per day of ground water will be used in construction phase of the project. For Operational phase total water requirement of the proposed project will be minutely for making glue and majorly domestic; required primarily for floor cleaning and for fire-fighting besides domestic uses (drinking). Groundwater will be the source of water for all these requirements. The ground water will be pumped from 90ft and is supplied by industrial estate. The total water requirement will be 200m³/day out of which 180m³/day is domestic water demand.

3.7 Management Plans

Following management plans will be employed to reduce the impact of the proposed activity

3.7.1 Air Emissions

Particulate dust will be generated during construction phase and to deal with the air emissions during the operational phase cyclones will be installed with the efficiency of more than 95% keeping in view of PEQs. For safety purpose the workers dealing with the process activities will be provided with masks, safety shoes and all other

necessary PPEs. To reduce the public nuisance native trees will be planted on the boundary to reduce the nuisance and to reclaim the disturbed soil effectively.

Design and Working principle of Cyclones

A cyclone removes particulates by causing the dirty airstream to flow in a spiral path inside a cylindrical chamber. Dirty air enters the chamber from a tangential direction at the outer wall of the device, forming a vortex as it swirls within the chamber. The larger particulates, because of their greater inertia, move outward and are forced against the chamber wall. Slowed by friction with the wall surface, they then slide down the wall into a conical dust hopper at the bottom of the cyclone. The cleaned air swirls upward in a narrower spiral through an inner cylinder and emerges from an outlet at the top. Accumulated particulate dust is periodically removed from the hopper for disposal.

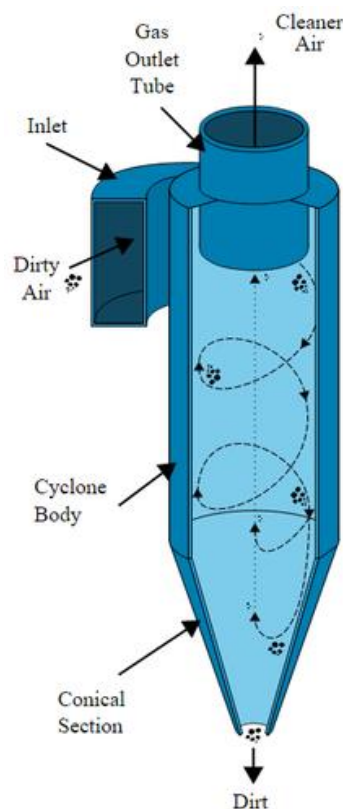


Figure 3-3: Cyclone for Air Emission Control

Table 7: Specification of Cyclone

Dimensions	Efficiency	
	Stairmand	Swift

$H_c/D_c=K$	0.5	0.44
$B_c/D_c=K_B$	0.2	0.21
$S_c/D_c=K_S$	0.5	0.5
$D_i/D_c=K_i$	0.5	0.4
$L_c/D_c=K_L$	1.5	1.4
$Z_c/D_c=K_Z$	2.5	2.5
$D_s/D_c=K_D$	0.375	0.4

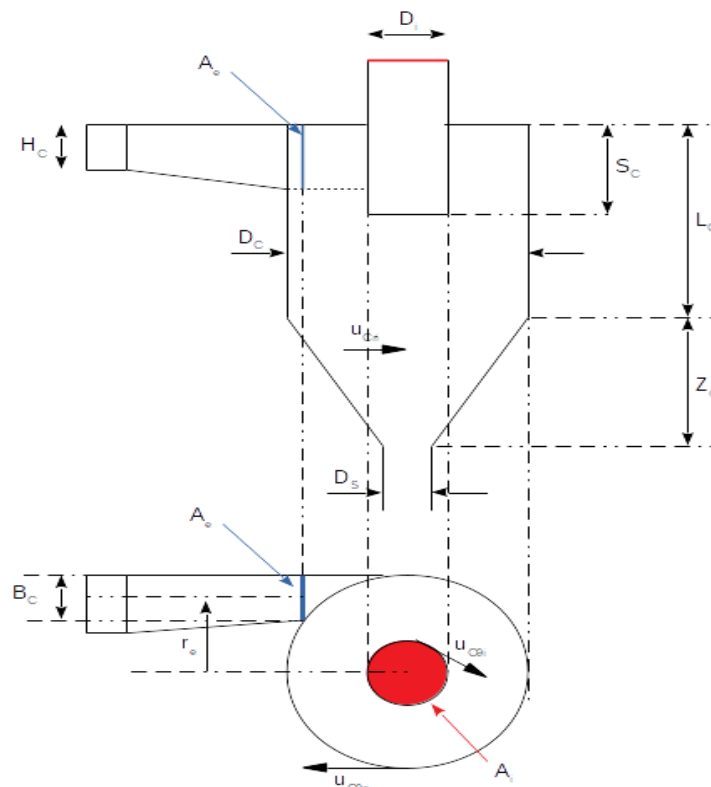


Figure 3-4: Design of Cyclone

3.7.2 Wastewater Management and Disposal

Major wastewater in project processing will be produced by the personnel daily uses. The wastewater generation rate from domestic activities will be 200-300 liters/day. This municipal wastewater will be treated through settling tanks. So, no hazardous wastewater will be generated or discharged to environment and septic are sufficient for greywater produced by the project. Domestic effluent from mine office will be

discharged in septic tank and soak pit system. Efforts will be taken to divert surface run-off from virgin area away from the broken-up area. Wastewater only in the form of domestic effluent from office and rest shelter will be generated. This effluent will be discharged in septic tank.

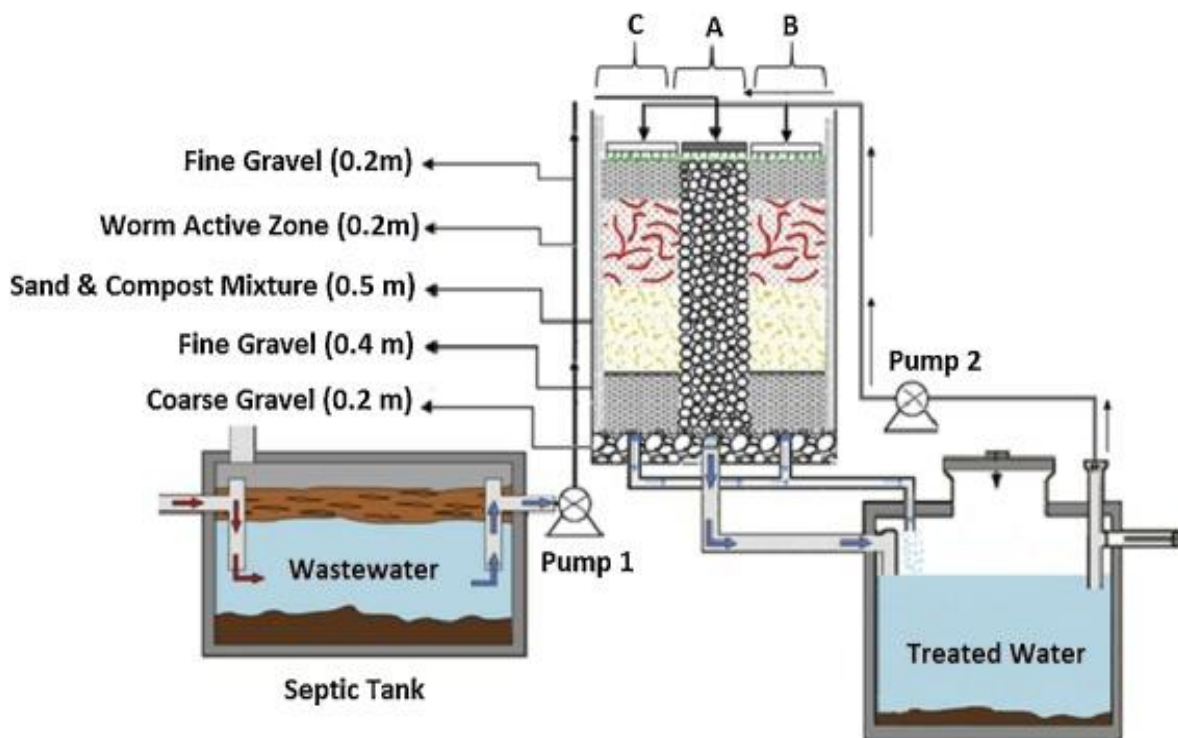


Figure 3-5: Design for Septic Tank

3.7.3 Waste Management

Most of the solid wastes that will be generated during the daily work can be divided into 3 main categories:

- i. The ordinary household wastes that the workers and the staff generate all-day around; e.g. kitchen and food residues, clothing, personal unneeded articles, etc.
- ii. Municipal residues; e.g. grass clipping, strings, scraps je sort, etc.
- iii. Cutting leftovers of packaging boxes.

Quantity of solid waste will 25 kg/day and is going to be dumped in the containers (number, capacity and type will be identified and sufficient for the needs) which will

be emptied by the municipality trash collection cars according to the acting regulations under the supervision of the concerned authorities. Collecting the trash/garbage will be followed on daily basis in disposable environmental friendly shopping bags.

3.8 Staff/Manpower

During construction phase of the proposed project about 50-55 people will be engaged for development of the project. Around 50+ workers will be required during process related activity. The breakdown of the workers employed is given below:

Table 8: Details of the Officers

Sr#	Designation	No.
1	Production Manager	03
2	Deputy Manager	03
3	Asst. Manager	04
4	HSE Manager	03
5	Electrical Manager	02
6	Mechanical Manager	02
7	Metallurgical Manager	01
8	HSE Inspectors	03
Total Number of Officers		20

3.9 Emergency Preparedness

Emergency response preparedness committee will be formulated consisted of heads of all departments and nominated members. Project Manager will be the head of the team who will chair the Committee. In the case of emergency, he will immediately

inform the concerned authorities. HSE Manager will be responsible for on-site HSE management.

First aid facilities will be available at facility which will include; blankets, hot water bottles, sterilized dressing, snake bite kit, cotton and iodine (2% alcohol).

3.9.1 *Safety Trainings*

Skilled, semi-skilled and un-skilled staff will be provided with proper training about the work and safety practices that need to adopt during the process activities.

3.9.2 *Use of Drugs and Narcotics*

Drugs and narcotics are strictly prohibited during working hours in working area. Smoking will be only allowed during rest timings at properly isolated places.

3.9.3 *Personal Protective Equipment's*

Following Personal Protective Equipment (PPEs) will be provided to the workers:

- ✓ **Safety Helmet**
- ✓ **Safety Shoes/Dry Shoes**
- ✓ **Dust Mask**
- ✓ **Safety Gloves**
- ✓ **Safety Jackets**
- ✓ **Earmuffs**
- ✓ **Insulating Gloves and Suits**

3.10 *Cost and Magnitude of Operation*

Total Cost of the proposed project is 18 million. The main activities involved in establishment of the proposed project are:

- The activities will include:
- Installation of the machinery.
- Purchase of instruments.
- Transportation of raw-material and final product
- Plantation of trees

3.11 Land ownership Documents

Site selected for the proposed project installation is under undisputed partnership and owned by three persons, power of attorney has been given to proponent Mr. Khalid Mahmood Malik. Land ownership documents have been attached as Annexure of EIA Report, which clearly shows that the selected area for the installation of Modern printing and packaging has been owned by the proponent through a proper channel.

3.12 Schedule of implementation

The completion duration of Modern printing and packaging is about 9-12 months. There will be a symmetrical process. The process is divided in to 3 phases

Preconstruction phase

This phase includes:

- Site investigation & Evaluation
- Budgeting
- Design
- Schedules of working
- Obtaining all relevant NOC

Construction phase

This phase includes:

- Management team& Construction Crew
- Excavation
- Construction of building
- Provision of allied facilities
- Mitigation process
- Amenities Development
- Managing safety
- Monitoring & Evaluation

Operational phase

This phase includes:

- Implementation of fire safety, emergency evacuation plans
- Security management
- Finishing of amenities
- Plant operations

3.13 Process Description

The project includes the manufacturing and printing of the packaging boxes.

3.13.1 Basic Raw Materials Required by the Proposed Unit

The basic raw materials such as glue, kraft paper rolls are mainly used in manufacturing of the finished packaging boxes. Approximately 19 ton/day of above-mentioned (kraft paper) as a raw material would be required for the project.

Area Reserved for Raw Material:

⇒ 1921 SFT

3.14 Manufacturing Process of finished product

The finished product includes variety of the packaging boxes of various size, shape and printed design according to the demand of the customer. While, the manufacturing process is explained below;

3.14.1 Corrugator

At the beginning of this process, kraft rolls from the paper mill are loaded into a huge machine called a corrugator. Some rolls of kraft paper are used as the corrugating medium that are crimped and others are used as liners, the layers of kraft paper glued on each side of the medium. In this whole first step the corrugator has heated, glued, and pressed the kraft paper to form corrugated cardboard.

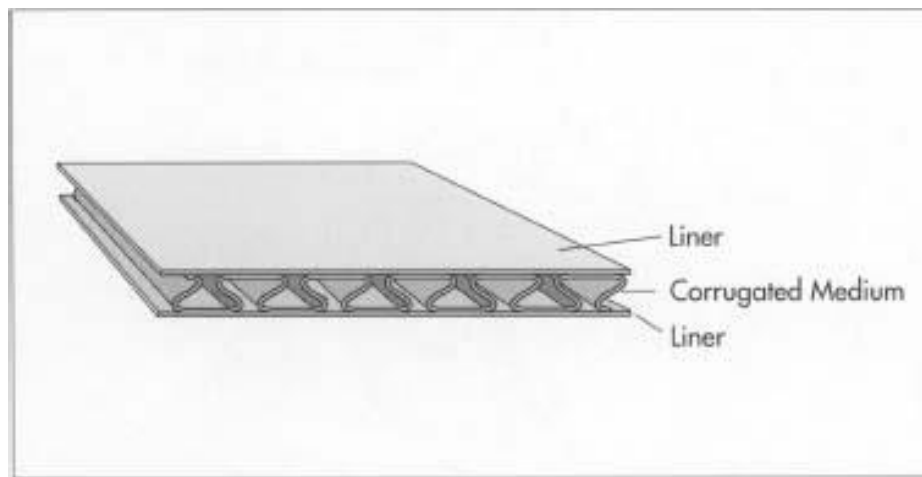


Figure 3-6: corrugated cardboard

3.14.2 *Trimming/Cutting*

At the end of corrugator, a slitter-scorer trims the cardboard and cuts it into large sheets called *box blanks*. Box blanks pop out of the slitter-scorer like wide slices of toast and slide into an automatic stacker that loads them onto a large, rolling platform. From here, they will be transported to the other machines that will further glue and fold.

3.14.3 *Pasting Machine*

Box blanks from the previous process will be used to glued together further in pasting machine that are than further used to printing boxes.

3.14.4 *Dye Machine*

Pasted corrugated box blanks will be printed according to the desired locals, color prints and patterns.

3.14.5 *Flatbed Trimmer*

The required shape of the box will be cut by pressing and passing it through flatbed trimmer.



Figure 3-7: Cutted Packaging Boxes

3.14.6 Folding and Gluing

Machine will used to shape the edges of the box and fold it to makeup end boxes. In small boxes adhesive material will be glue while for the larger boxes glue will be coupled with the pins to ensure the retention of shape of large size boxes.



Figure 3-8: Printed packaging boxes

3.15 Relocation and Rehabilitation Plan

There exists no human settlement in safe radius of the selected project site to be displaced owing to the commencement of the proposed project. Moreover, no structure of any significance stands at the site is proposed to be relocated or dismantled. The project area is owned by the proponent. So, no restoration and rehabilitation are required.

5. DESCRIPTION OF THE ENVIRONMENT

This chapter provides baseline data (physical, biological and socio-economic parameters) related to the project and study area. The information has been compiled by using primary and secondary data resources. This chapter also refers to the theoretical analysis of the methodology adopted for collection of baseline data. The underlying principles and practices adopted in this regard are also discussed.

4.1 Methodology

The methodology employed to collect the baseline data and information regarding the social structure and various related parameters as discussed in sub-sections below:

4.1.1 Data Collection

The primary data was collected by visiting the project area and its communities in its nearby vicinity. The secondary data regarding physical parameters (topography, geology, seismology, and climate) was obtained by visiting relevant various government departments and their official websites. The biological parameters such as flora and fauna were studied by preparing a floristic list based on visual observation and fauna was studied by using opportunities approach. The species were recorded with reference to their existence in the project area. Information on wildlife fauna species (mammals, amphibians, reptiles, birds, etc.) in the assessment area was compiled based on opportunistic observation, gathering the existing information and consultation with local experts, community members and government and Non-Government Organizations (NGOs). The socioeconomic aspects were studied and analyzed by studying detailed village profile and by conducting household surveys.

4.1.2 Social Survey

The purpose of social survey was to record the present condition of the people living in the project area and to assess the expected project impacts on their life, subsistence systems and socio-cultural conditions. Prior to conducting the field surveys, the following steps were taken:

- Clear boundaries of the project area were identified

- Decided the sampling procedure in order to draw a representative sample size of the target population and households
- Developed the tools for data collection i.e. questionnaires to access the socio-economic status of the area

4.1.3 *Sampling Design*

Social baseline data of the persons residing in the study area has been estimated and collected through random sampling by using pre-developed questionnaires.

4.1.4 *Questionnaires*

In order to test the validity and reliability of the proposed questionnaires, they were reviewed to assess whether questions needed to be clarified, changed or re-sequenced and then a final editing of questionnaires was conducted prior to their application in the project area. The sample of socio-economic questionnaires used is attached as Annexure.

4.1.5 *Data Editing and Analysis*

The filled questionnaires and recorded information were compiled by the same field investigators who were involved in the data collection. This was done immediately after completing the field investigations. Data sets were processed. Analysis of the data and preparation of conclusions in the minimum possible time was done using statistical techniques of data analysis.

4.2 *Review of Legal and Administrative Framework*

The objective of reviewing legal and administrative framework is to obtain information on all legislation pertaining project development. The Socio-Environment Team of Central Environment Services reviewed the environmental policies, national, international and provincial laws and guidelines relevant to the development of project which helped in systematic identification of impacts.

4.3 Baseline Conditions

This chapter provides baseline data (physical, biological and socio-economic parameters) related to the project and study area

4.4 Physical Environment

Pakistan Can be divided into five broad physiographical regions. These are the mountainous regions of the north, the western highlands and plateaus, the sub-mountains Indus region, the Potohar Plateau, Salt Range, and the Indus Plain. Brief description of these regions is given below:

Region	Characteristics	Location	Height
Northern Mountainous	Hindu Kush Karakoram and Himalayan Mountain Ranges	Northern Part of KPK, Gilgit Agency, Northern Areas and Kashmir.	Rises above 8,000m
Western Highlands and Plateaus	Toba Kakar, Sulaiman, Central Baruhi, Saihan, Central Makran, Makran Coastal and Kirthar Ranges	Mainly in Baluchistan, also parts of Sindh and KPK	Between 1,200 to 3,000 m
Sub-Mountains Indus	Alluvial filled Basins	Plains of Peshawar Kohat and Bannu	Less than 1,000 m
Potohar Plateau and Salt Range	Flat to gently undulating surface, broken by gullies,	Mainly northern parts of Punjab, some parts of KPK	Less than 1,000 m
Indus Plain	Flood plains of the Indus, Jhelum, Chenab Ravi and Sutlej Rivers	Punjab and Sindh	Less than 1,000 m

4.4.1 Topography

Kasur District lies between River Satluj which flows along its boundaries with India and River Ravi which flow its boundary with Sheikhpura District. The districts may be divided into two parts, a low lying or riverine area along the two bordering rivers and upland, away from the rivers. The riverine area is generally inundating during monsoon season. The water level in this area is higher than in the upland. The soil of the district is sandy. The upland is flat plains sloping from North-West to South-West. The general height of the area is from 150 to 200 meters above the sea level. The land of the project area is plain and highly fertile i.e. consists of sand silt and clay in equal ratios. The irrigation in most of the areas is through the canal system as well as by using water pumps. The topography of the proposed site is flat.

Project Site:

The proposed project site is located in District Kasur

4.7.2 Hydrology

Groundwater from depth of 100 ft can be used for drinking and other purpose. Groundwater is the major source of water in the study area, which is extracted with the help of pumps and motors. The groundwater extracted is used to fulfill various domestic, irrigation and industrial needs. Ground water quality report of area is annexed. No surface water body is present within 5 km radius of the project site.

4.7.3 Seismicity

According to Seismic Zoning of Pakistan, the project area lies in Zone 2A and represents minor to moderate damage due to earthquakes.

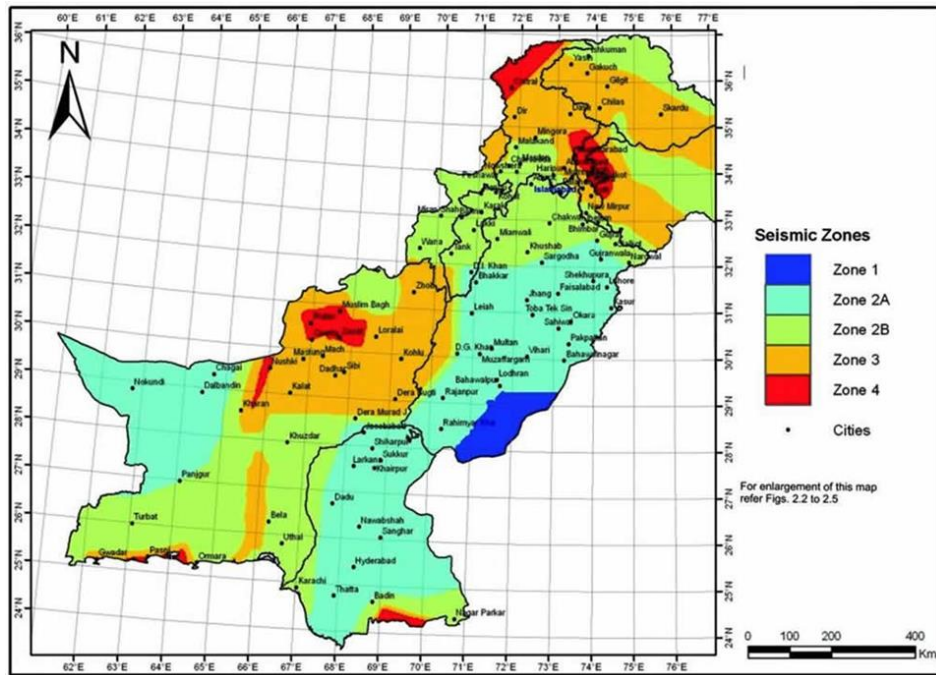


Figure 5-1: Seismic Zoning Map of Pakistan

4.7.4 Geography

The District Kasur is bounded by the Ravi River in the North-West and River Sutlej in the South-East whereas, the old course of Beas River bifurcates the district into two equal parts locally known as Hither and Uthar or Mithan Majh. Both of the areas have a height differential of approximately 5.5 meters. The natural surface elevation of the district is 198 meters above the sea level, having a general slope from North-East to South-West whereas, the East and West ends of the district comprise the flood plains of the rivers Satluj and Ravi, characterized by breaching of looping river Channels braided around meander bars.

Kasur District is attached with Lahore from east, attached with Nankana Sahib from North, attached with Faisalabad from West and attached with Okara and India from South. The geographical coordinates of the City are 31° 7'3.40" north and 74°26'59.82"east, whereas, the coordinates of the project site are 31°11'8.86"N 74°26'0.53"E.

4.7.5 Climate

Climate of District Kasur is very hot and dry in summer and cool in winter. The hottest months are April to September. The maximum and minimum temperatures are 46°C

and 28°C respectively. The coldest months are December to February. During this period the temperature fluctuates between 16°C and 6°C as shown below. Temperature at the project site was 28°C.

Precipitation is the lowest in November, with an average of 3 mm. The greatest amount of precipitation occurs in July, with an average of 1150 mm.

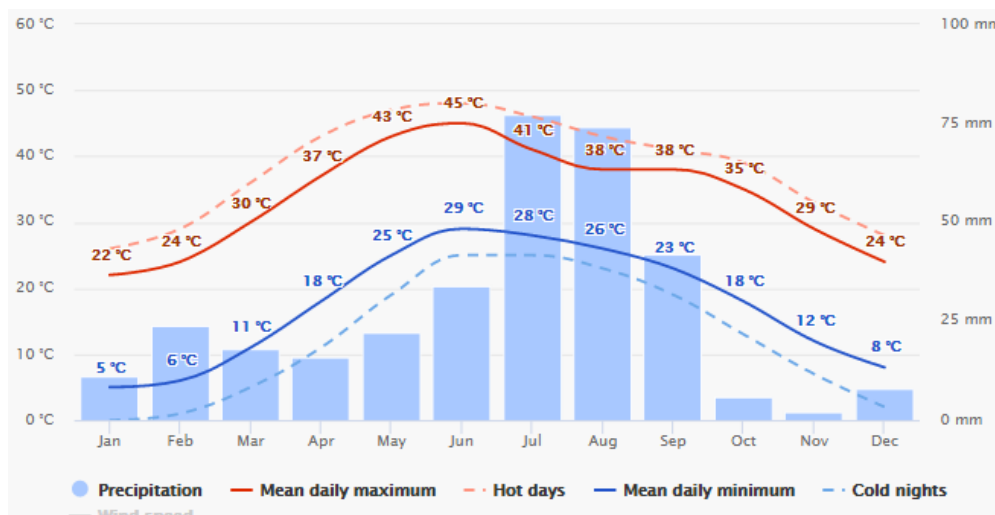


Figure 5-2: Average Annual Temperatures and precipitation in Kasur

The "mean daily maximum" (solid red line) shows the maximum temperature of an average day for every month for Kasur. Likewise, "mean daily minimum" (solid blue line) shows the average minimum temperature. Weather in Kasur is influenced by Subtropical Dry Semiarid Steppe climate. Low-latitude dry climate. Evaporation exceeds precipitation on average but is less than potential evaporation.

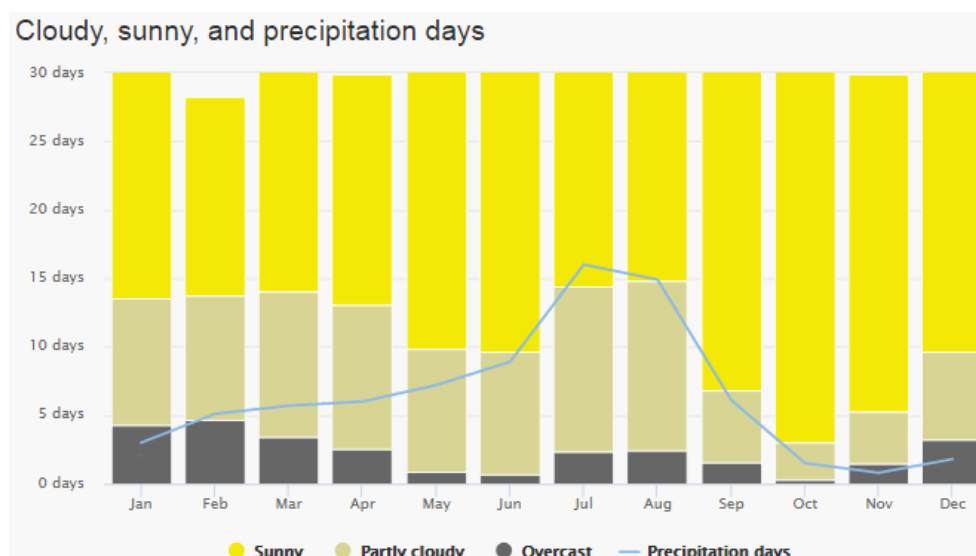


Figure 5-3: Maximum temperature ranges in Kasur

The graph shows the monthly number of sunny, partly cloudy, overcast and precipitation days. Days with less than 20% cloud cover are considered as sunny, with 20-80% cloud cover as partly cloudy and with more than 80% as overcast.

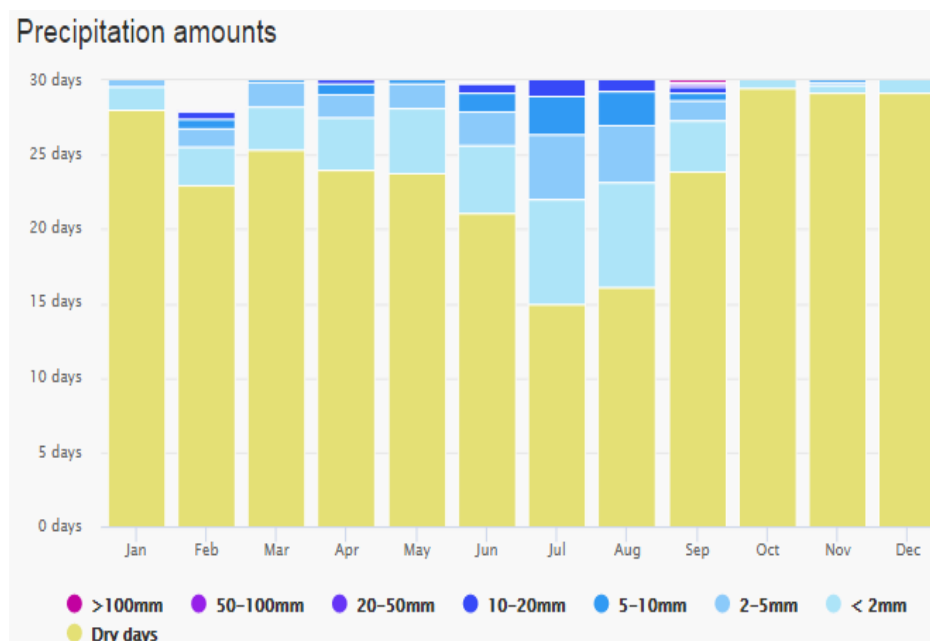


Figure 5-4: Annual Precipitation amounts in Kasur

4.7.6 Wind

The diagram for Kasur shows the Max and Average Wind speed and Wind Gust.

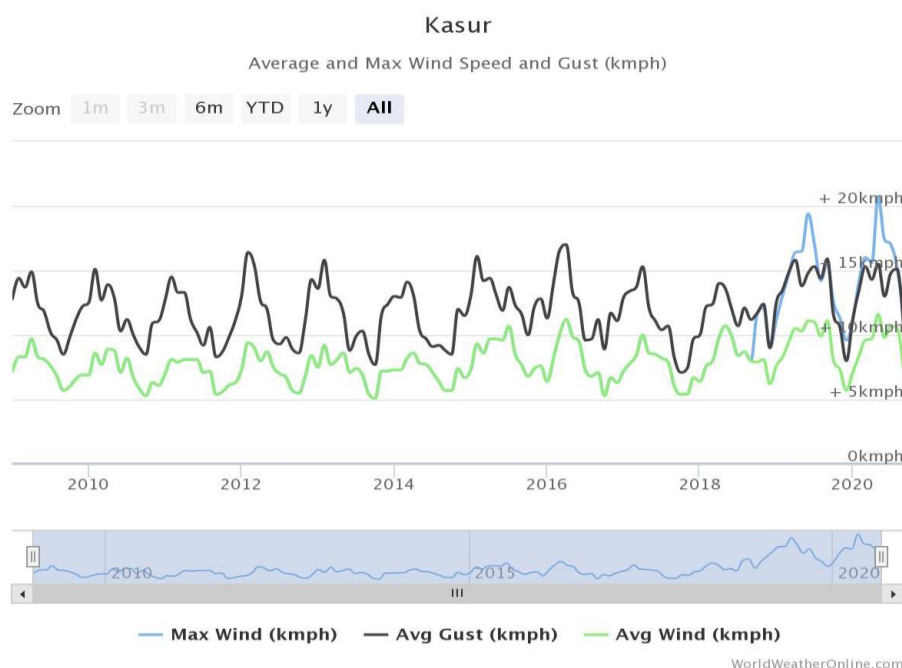


Figure 5-5: Annual average wind speed in Kasur
(<https://www.worldweatheronline.com>)



Figure 5-6: Wind Rose diagram of Kasur

The wind rose for Kasur shows how many hours per year the wind blows from the indicated direction. Example SW: Wind is blowing from South-West (SW) to North-East (NE).

4.8 Ecological Environment

Kasur is enriched with the presence of natural flora and fauna, although with the growing population and development activities, the presence of some has been somewhat affected. They are discussed in detail below

4.8.1 Aquatic Flora & Fauna

No aquatic ecosystem (i.e. canal, stream, river or pond) observed within or around the study area, which omits the possibility of any kind of aquatic species that may be harmed due to the establishment of proposed project.

4.8.2 Flora

The project is located in industrial area. The project site has no vegetative cover, hence, no trees or vegetation will be removed. The dominant tree species in study area include; Eucalyptus, Neem, and Kikar. The crops present around project site include

wheat, sugarcane and common grass. The nomenclature including common, English, local and botanical names of the flora found in the study area are presented in Table

Table 9: Flora of the Study Site

S#	Common Name	Scientific Name
1	Neem	<i>Azadirachta indica</i>
2	Kikar	<i>Vachellia nilotica</i>
3	Safeda	<i>Eucalyptus globulus</i>

4.8.3 Fauna

For study of fauna in the project area, field guides and books were consulted. On the other hand field observations were conducted along with the interviews of local community members about the fauna of the area. The equipment used in field included cameras, binoculars and GPS device (wherever required). It is important to note that there is a number of factors which can change the findings of such survey. It may be pointed out that the pattern of seasonal migration of small birds varies depending upon each specie. During the construction activity in project area, no important biological feature will be damaged or disturbed as the project falls in industrial area.

The fauna commonly found in District Kasur includes; Hares, Falcon, Eagle, Quail, Starling, Jungle Pigeon, Russian Sparrow, Doves, King Fisher, Parrot, Crow and Local Sparrow.

Commonly found mammals in the area include; dogs, cats, horses, house-rats, squirrels, porcupines and bats. However, Small Indian Mongoose and Indian Palm Squirrel are also found in the District Kasur.

Table 10: Mammals in Study Area

S#	Common Name	Scientific Name
1	Rat	<i>Rattus</i>
2	Bat	<i>Chiroptera</i>
3	Small Indian Mongoose	<i>Herpestes javanicus</i>
4	Indian Palm Squirrel	<i>Funambulus palmarum</i>
5	Porcupines	<i>Erethizon dorsatum</i>
6	Squirrels	<i>Sciuridae</i>

The commonly found bird's species include; House Sparrow, Crow and some of them are mentioned below with scientific names.

Table 11: Birds in Study Area

S#	Common Name	Scientific Name
1	House Sparrow	<i>Passer domesticus</i>
2	House Crow	<i>Corvus splendens</i>
3	Pigeon	<i>Columbidae</i>
4	Bulbul	<i>Pycno notidae</i>
5	Teetar	<i>Francolinus francolinus</i>
6	Parrot	<i>Psittaci forms</i>

7	Titodi	<i>Vanellus indicus</i>
---	--------	-------------------------

In District Kasur reptiles such as Snakes (Cobra and Kraits), Spiny Tailed Lizard and Fringed Toed Lizard are common in the tract, but cases of snake bites are very rare, as these reptiles have been either killed by expanding urbanization or they have moved away.

Table 12: Reptiles in the Study Area

S#	Common Name	Scientific Name
1	Snake	<i>Serpentes</i>
2	Spiny Tailed Lizard	<i>Uromastix hardwickii</i>
3	Fingered Toed Lizard	<i>Acanthodactylus cantoris</i>
4	Earthworm	<i>Lumbricina</i>

The amphibians commonly seen around the project area, especially during the rainy season includes;

Table 13: Amphibians in the Study Area

S#	Common Name	Scientific Name
1	Common Frog	<i>Rana temporaria</i>
2	Indus Valley Toad	<i>Bufo stomaticus</i>

A large number of insects are present due to open fields in the project site. Few of these insects are known to cause diseases in local population. Following is a list of commonly observed insects at the site:

Table 14: Insects in Study Area

S#	Common Name	Scientific Name
----	-------------	-----------------

1	Black Ants	<i>Paratracheaiognicornis</i>
2	Dragon Fly	<i>Dragon Fly</i>
3	House Flies	<i>Musca domestica</i>
4	Butter Flies	<i>Parnassiusbalucha</i>
5	Honey Bees	<i>Apismellifera</i>
6	Wasps	<i>Anagyrus pseudococci</i>
7	Grasshopper	<i>Melanoplus differentialis</i>
8	Mosquito	<i>Anophlese sp.</i>

No endangered species are found at the site. The area has not been identified as ecologically sensitive area by wildlife department.

4.8.4 Ambient Air Quality

Ambient air quality monitoring was carried out on the project site. The Impinges Method and Drager Miniwarn, Germany manufactured ambient air quality monitoring equipment was used. Monitoring carried out for Sulfur dioxide (SO₂), Nitrogen oxides (NO_x, NO and NO₂) and Carbon monoxide (CO).

The degradation of air quality in all the large cities is a major environmental concern these days. Air pollution levels in urban centers have either crossed safe limits given in the PEQS or have reached the threshold values.

About 60 to 200 % of the deterioration in the air quality is due to the vehicular emissions. The parameters which have proved to be the major threat are particulate matter and concentration of oxides of nitrogen that are relatively higher in all the large cities of Punjab.

Atmospheric pollution particularly in urban area has a strong impact upon daily life. Kasur is the main city of Pakistan. Its economic growth, industrial progression &

transport have risen to grounds responsible for growing energy consumption leading ultimately to the consequences of increase in air pollution. The main sources of air pollution are exhaust from motor vehicles and industries. The main exhaust gases include SO₂, NO₂, CO, etc. Particulate Matter (PM) and noise which are inspected as the pollution indicators.

It was observed during the visit that Petrol and Diesel operated vehicles are emitting smoke and exhaust gasses in excessive quantity which are the leading sources of environmental pollution and responsible for the air quality worsening. In fact, exhaust emissions (including dangerous gases such as carbon monoxide, oxides of nitrogen, hydrocarbons and particulates) and Evaporative emissions (including vapors of fuel which is released into the atmosphere, without being burnt) are the prime reasons of deterioration of air quality. It was however observed during the visit that environment of the project area is clean.

4.8.5 Noise

Noise is described as an unwanted sound emitted from un-avoidable sources of anthropogenic activities. Daily based natural induced sources of noise are rare to none but human induced noise sources are plenty and un-avoidable. Physically, there is no distinction between sound and noise. Sound is a sensory perception and the complex pattern of sound waves is labeled noise, music, speech, low altitude aero plane flying etc.

Environmental noise is a common cause of hearing loss of people indulged in industrial activities. Noise pollution in the city is on the rise with most residents complaining that the noise is becoming a public nuisance.

Project Site:

Noise level was monitored at the time of field survey.

4.8.6 Water Resource

The main source of the water consumption is the ground water which is being pumped from 200 ft borehole and its being used in the study area for domestic purposes. To check the quality of the water in the area, ground water was collected

and analyzed. The ground water was collected from bore hole adjacent to the project area.

4.9 Socio-Economic Resources

This section provides collective information about the existing socio-economic and environmental condition of the project area within the AOI. The different types of socio-economic aspects were covered such as demographic profile, occupation, education and health facilities. This data helped in identifying major interventions for the development of Environmental Management and Monitoring Plan (EMMP). The study also helped to assess the positive or adverse impacts on local community.

4.10 Socio-Economic Profile of Study Area

This topic provides an overview of the baseline information relating to the socio-economic environment of the project area and the AOI. The socio-economic study gives information about the demographic profile, occupation, education and health facilities in the project area.

4.10.1 Study Area Profile

The village profile reflects the basic socio-economic conditions of local people. These parameters indicate the needs of society while planning the the aforesaid project. The village profile has been obtained by meeting with community representatives who are well aware about their surroundings. The consultant, with his team, visited project area and study area in order to identify the socio-economic and environmental aspects of project. The following information is obtained by surveying the community.

Table 15: Study Area Profile

S#	Socio-Economic Indicators	Qutba
1	Language Spoken	Punjabi
2	Distance from Project Area	1.35 km

3	Accessibility of Road	Metaled Road
4	Transport	Public and Private Transport
6	Population	4000+
7	Livelihood	Agricultural, Livestock and Labor
8	Houses	More than 200
9	Educational Facilities	Primary School, Secondary School and Govt. & Private Schools
10	Institutional Facilities	Mosque
11	Civil Facilities Available	Electricity, Water Supply and Graveyard
12	Source of Water	Groundwater
13	Common Diseases	Fever, Hepatitis, Common Cold, TB, Typhoid, Diarrhea and Malaria
14	NGO Working in Study Area	NIL
15	Historical Place	NIL
16	Simble industries	10

17	Saw	15
18	Types of Trees	Neem, Kikkar and Eucalyptus
19	Disaster Management	NIL
20	Major problems of the Study Area	Safe Drinking Water, Sanitation and Sewerage System, Roads Access, Educational and Medical Problems.

4.11 Demographic Profile

The Demographic Studies are the major source of any city's Socio-Economic profile. Demographic Studies relate to population. Population studies are extremely important from Town Planning point of view. Until and unless we know about population in detail, we cannot do successful planning. All aspects of population, such as sex-age composition, trend of migration, social, cultural, political, economic and administrative works, values and facilities have to be related to planning considerations and decisions. Individuals are the raw material of society; therefore, society is directly affected by size, growth, composition and distribution of its individuals. The term population refers to the number of individuals living within a geographical area at a given time.

Different community individuals in the vicinity of the project area have different family sizes depending upon their living setups. Average family size is however 5-7 individuals per family with 1-2 earning hands per family.

4.11.1 Health Facilities

As the project site is in an Industrial zone. DHQ Hospital Kasur is located at the distance of approx. 77 km radius. Some other private health center is present as Villages area present in the vicinity of the project site.

4.11.2 Educational Facilities

As the project site is not located in any residential area. However, the villages located around project site have few government primary schools.

4.11.4 Demographic Characteristics of the Population

The field survey (including interviews, focus group discussions, census, and area profile) was carried out to collect the socioeconomic data from the project affected people as well as other general population to accomplish the baseline information, which will provide the basis for subsequent monitoring and evaluation studies.

The demographic features include the information on household's profile, gender composition, occupations, and literacy status of the population residing in the project area. The information relating to the demographic profile of the people in the project area are described below.

4.11.5 Family Size

Based on the field survey of local population, the average family size computed to be 5-6.

4.11.6 Age Groups

Ages of the consulted population were also recorded. The people interviewed for the socio-economic assessment belongs to different age groups i.e. 20-35 years, 36-45 years, 46-55 years, and 56 years and above.

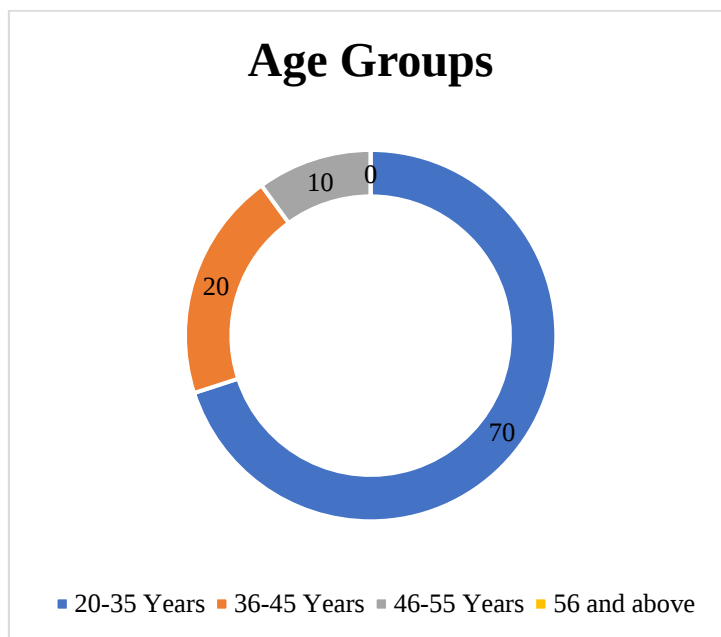


Figure 5-7: Consulted age groups in the area near project site

4.11.7 Occupation of Respondents

Majority of the respondents (55%) are attached with agriculture, 20% shopkeepers and remaining 150% are labors. During survey, efforts were made to interact with people representing all walks of life. The detailed graphic representation of occupational status is given below:

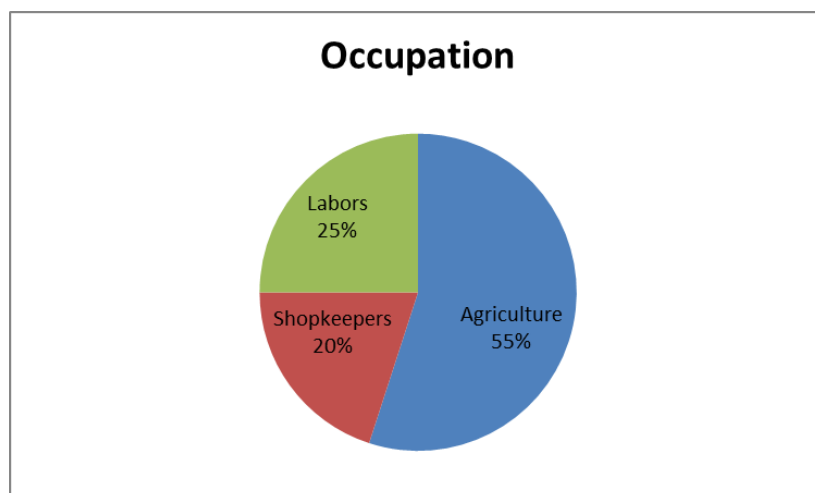


Figure 5-8: Occupation of Respondents

4.11.8 Literacy Rate

From survey results, it was found that 75 % of the studied population was illiterate, 15% was up to primary level, 10% studied up to middle level.

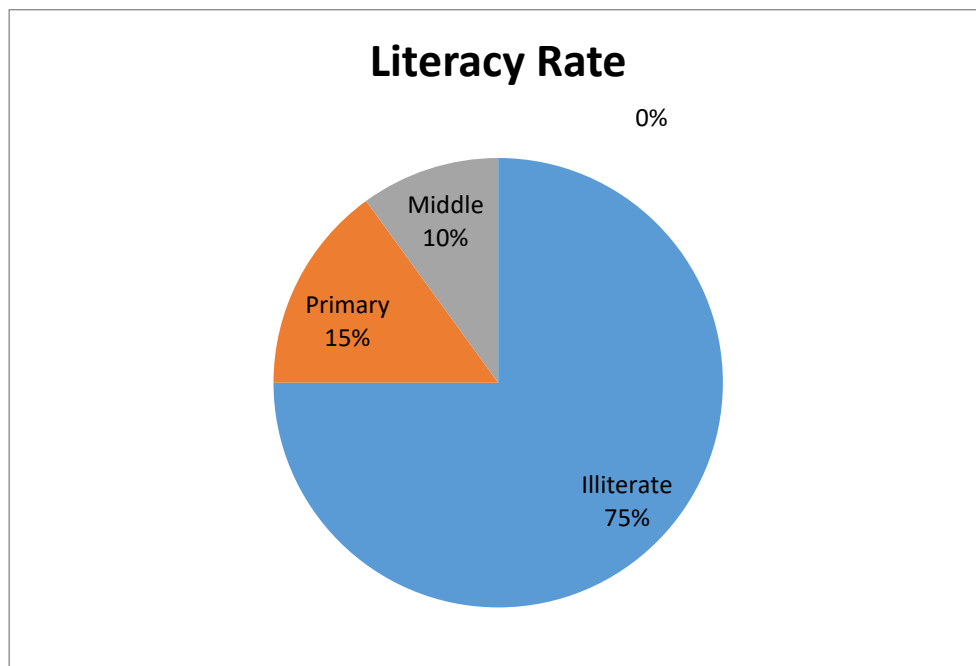


Figure 5-9: Literacy Rate

4.11.9 Common Diseases

According to the survey the common disease recorded in the project area is Hepatitis.

4.11.10 Cultural, Religious & Other Structures

No cultural, religious and other structures are present in the close proximity of the project area that needs to be relocated. Villages present around the project site have mosques and imam bargah.

4.12 Lab Reports of Environmental Analysis

Testing of different parameters was done from a certified laboratory named SEAL to check the quality of different environmental parameters. The copy of the lab reports of these parameters (ambient air analysis, water quality analysis and noise) is attached at Annexure of this EIA Report.

4.13 Suitability of Site:

Comprising all assessment of above baseline data there will be no significant ecological/ environmental impact expected in and around the present selected project site, hence it is suitable for the proposed project.

6. PUBLIC CONSULTATION AND INFORMATION DISCLOSURE

Public consultation refers to the process by which the concerns of local affected persons and others who have a plausible stake in the environmental impacts of the project or activity are ascertained with a view to taking into account all the material concerns in the project or activity design as appropriate. According to the IEE and EIA Review Regulations, public consultation is mandatory for any socio-environmental study.

5.1 Proponent's Environment Management Team

Following are the designated roles and responsibilities of the employees involved in the monitoring and management of the adverse impacts and will be appointed after operation of project starts.

Roles and Responsibilities		
Sr#	Concerned Persons	Duties
1	The Project Manager	Following will be the responsibilities of the Project Manager • Ensure that the contractor is aware of all specifications, legal constraints, standards and procedures pertaining to the project specifically with regards to environment. • Ensure that all stipulations within the EMMP are communicated and adhered to by contractor(s) • Monitor the implementation of the EMMP throughout the project by means of site inspections and meetings. This will be documented as part of the minutes of the site meeting documents • Ensuring project execution within defined budget and timelines

		• Conducting regular check of the project status and meetings with project team • Provide support and guidance to project team as and when needed • Project Manager is expected to continually monitor and improve the overall performance of their operation
4	HSE Manager	In addition to the health and safety responsibilities held by staff, managers and supervisors must do whatever is reasonably practical to ensure that both the workplace and the work itself are safe. This includes: • Ensuring that staff are appropriately trained and supervised • Identifying, assessing and managing health and safety risks • Consulting with workers (including staff, affiliates and contractors): i. Health and safety risk assessments ii. Decisions are made about the measures to be taken to eliminate or control these risks iii. Health and safety risk assessments • Implementing health and safety risk management programs relevant to their operations, teaching, research and consulting functions and work environment • Reporting (to the Human Resources Unit), investigating and responding to all hazards, accidents, incidents and taking action to control the risk • Assisting with the development, implementation and maintenance of a return to work program for injured staff.

		• Be fully conversant with the EIA and conditions of its approval • Be fully conversant with the EMMP • Be fully conversant with all relevant environmental legislation, policies and procedures, and ensure compliance • Convey the contents of this document to the contractor site staff and discuss the contents in detail with the Project Manager and Contractor • Undertake regular and comprehensive inspection of the site and surrounding areas in order to monitor compliance with the EMMP • Take appropriate action if the specifications contained in the EMMP are not followed • Monitor and verify that environmental impacts are kept to a minimum, as far as possible • Review and approve construction methods, with input from the Site Manager, where necessary • Ensure that activities on site comply with all relevant environmental legislation • Compile progress reports on regular basis, with input from the Site Manager, for submission to the Project Manager, including a final post excavation audit • Liaise with the Site Manager regarding the monitoring of the site • Report any non-compliance or remedial measures that need to be applied • All environmental problems arising on the construction area will be reported to the Site Manager by the Environmental Manager. Reports on such problems will be submitted to the Project Manager by the Site Manager
--	--	--

5.2 The Responsible Authority

Impact assessment survey and public consultation sessions held with different stakeholder groups that may be impacted by the proposed project commencement. The consultation process was carried out in accordance with the guidelines laid by Punjab-EPA. The objectives of this process were to:

- ⊙ **Share information with stakeholders on proposed project installation and operation**
- ⊙ **Access the impacts on the physical, biological, and socioeconomic environment**
- ⊙ **Understand stakeholder concerns regarding various aspects of the project commencement**
- ⊙ **Find out valuable suggestions by the stakeholders to improve the proposed project design**
- ⊙ **Understand the perceptions, assessment of social impacts and concerns of the affected people/communities of the project area**
- ⊙ **Find out the awareness level and situation of acceptability to identify any issues for the implementation of the proposed project**
- ⊙ **Invite people to express their views about the positive/negative impacts on their lifestyles and environment**
- ⊙ **Disclose information about contact offices/officers for any complaints/queries**

It is envisaged, there will be no social impact being foreseen due to the construction and operation of Air Pharmaceuticals (PVT) Ltd at the proposed location. This EIA Report includes all the comments, which were taken into account during the social survey and preparing the definitive development concept for the installation and operation of Air Pharmaceuticals (PVT) Ltd in G. Public consultation performas is attached as Annexure of this EIA Report.

5.3 Objectives of Consultation

Public consultation plays a vital role in studying the impacts of the proposed project on stakeholders in successful implementation and execution of the project. It provides an opportunity to exchange knowledge with the beneficiaries and affected parties.

Referring particularly to a project related to environmental assessment, involvement of the public is all the more essential, as it leads to better and more acceptable decision-making. The overall objective of the consultation with the stakeholders is to help verify the environmental and social issues, besides technical ones, that have been presumed to arise and to identify those which are not known or are specific to the project. In fact, discourse with many who have thoroughly observed the site conditions in the pre-development phase, goes a long way in updating the knowledge and understanding.

5.4 Identification of Stakeholders

All the people who are directly or indirectly affected or concerned with the project are the stakeholder. Besides the living population of the surrounding areas, some other stakeholders were identified and contacted which enlisted below. They are the key players including; shops, public and government offices, schools, university, hospitals, hotels, international agencies and the NGOs. Not only published material, brief or other literature were obtained on request, but also noted their views and the concerns, in an official capacity as well as on the personal basis. Following stakeholders are identified for this project:

Project Affected Persons (PAPs) include the settled families, either property owners or the tenants, businessmen (big, shopkeepers, vendors, etc.), employees of the commercial entities. PAPs are of two types, for instance:

5.4.1 Direct Stakeholders

No disturbance in the local community is being foreseen due to the installation of the aforesaid project as the community is at a safe distance. No property loss is being envisaged due to the construction of the Air Pharmaceuticals (PVT) Ltd

5.4.2 Indirect Stakeholders

Indirect impact will occur on those who are living or doing business within a Project Area of Influence (AOI). In the case of the proposed project, the citizens of nearby small towns) will get opportunities of being employed. So, in the early development

stages and during the operational phase the people will be benefited due to the installation of the Air Pharmaceuticals (PVT) Ltd

5.4.3 Other Departments and Agencies

Following departments are related to the project in public consultation:

- ➔ **Government agencies responsible to deal with the project related activities**
- ➔ **Government Agencies directly, indirectly or widely involved in the execution and monitoring of the proposed project**
- ➔ **Government departments such as TMA and Planning & Development Department, Forest Department, Agricultural Department Industrialist around the estate and working on the other development activities are considered as indirect stakeholders**
- ➔ **Workers of political, cultural, religious or social scientific bodies, directly or indirectly related to the project**

5.5 Public Disclosure

Public disclosure is the outcome of all such activities where the public is involved at least in the information sharing process. This is an integral part of the process. So, before the proponent applies for NOC to the Punjab-EPA, this disclosure will be distributed properly among all stakeholders. It is the responsibility of the proponent and the consultants to display a public disclosure document in prominent places where community has easy access.

5.6 Consultation Process

Information disclosure, public consultation and discussion regarding the various aspects of the project with the people of the area are necessary. This process is intensified during the EIA Studies, and separate rounds of public consultations were held. Surveys were carried out in order to investigate physical, biological and socioeconomic resources falling within the immediate AOI of the project. Primary data collection included:

- ☒ **Data collection regarding the socioeconomic condition of the study area**
- ☒ **Pre-testing of socioeconomic survey tools in the field**

EnvironTech Consultants (Pvt) Ltd.

Office no. 11, Second Floor, Centre Point Plaza, Main Boulevard, Gulberg, Lahore
Contact +92-303-4342302

- ☒ **To consult the locals for collection of information on biological environment**

Various meetings with the stakeholders were held the following objectives:

- ➔ **Share information with stakeholders on the proposed project and expected impacts on community in the vicinity of the project**
- ➔ **Understand stakeholders' concerns regarding various aspects of the project, including the existing condition of the upgrading requirements, and the likely impact of construction and operation activities**
- ➔ **Provide an opportunity to the public to influence the project design in a positive manner**
- ➔ **Obtain local and traditional knowledge, before decision making**
- ➔ **Increase public confidence about the proponent, reviewers and decision makers**
- ➔ **Reduce conflict through the early identification of controversial issues, and work through them to find acceptable solutions**
- ➔ **Dissemination of information through discussions, education and liaison**
- ➔ **Documentation of information narrated by the stakeholders and mitigation measures proposed by the stakeholders**
- ➔ **Incorporation of public concerns and their address in the EIA; and eliciting their comments and feedback**
- ➔ **Create a sense of ownership of the proposal in the mind of the stakeholders**

5.7 Environmental Practitioners and Experts

Officers of government departments and industries were consulted by the socio-environmental team of the consultants and concerned details about the project were noted down through personal interviews, group meetings, etc., in their offices, for instance. List is attached as an annexure.

5.8 Affected and Wider Community

In addition, to the use of direct methods to evince the response of the various stakeholders in the population of the study area was ascertained by conducting a sample survey, through specially formatted questionnaires (attached in the Annexure of this EIA Report). Questions posed to the public were related to creation of possible

impacts, adverse impacts and beneficial impacts, including; employment opportunities, income generation activities, change in living standards and provision of the amenity.

- ☒ **Disclose the proponent plan of the construction of the proposed facility**
- ☒ **To share information on the design and specifications of proposed project works**
- ☒ **To analyze the expected impact on the socioeconomic environment**
- ☒ **To understand their concerns regarding various aspects of construction and operation**

5.8.1 Views, Concerns and Suggestions of Various Stakeholders

Community showed a lot of concerns; a few are being mentioned here:

- ✍ **Removal of shrubs and trees should be avoided to the extent possible**
- ✍ **The project will become the source of income for local to earn their livelihood easily and honorably**
- ✍ **The area will become further industrialized**
- ✍ **For the solid waste management and waste disposal, proper disposal techniques should be adopted**
- ✍ **Employment opportunities will be generated, and locals should be hired on the priority basis**
- ✍ **The air pollution is one of the major impacts of the proposed project, so ambient air quality should be monitored regularly.**
- ✍ **Water spraying/sprinkling should be done on the regular basis during construction phase to avoid dust emissions**
- ✍ **Removal of shrubs and trees should be avoided to the extent possible**
- ✍ **Good relations with the local communities will be promoted by encouraging Contractor to provide opportunities for skilled and unskilled employment to the locals as well as on-job training**
- ✍ **The contractor should prefer hiring local labor from adjacent nearby villages**
- ✍ **Indigenous trees around the facility should be planted to control air pollution and as the compensation**
- ✍ **Noise reducing barriers should be installed to reduce noise pollution**

Concerns

- ☒ **Workers should be hired from local community**
- ☒ **Proper disposal of solid waste should be practiced**
- ☒ **Indigenous trees around the facility should be planted to control air pollution**
- ☒ **Removal of shrubs and bushes should be avoided to the extent possible**

5.8.2 Addressing Public Concerns

The best mechanism of effective communication between the community and the proponent is the by the nomination of the representative of the community and all the issues/concerns must be recorded for future reference. This representative may be the member of the Grievances Redressed Committee (GRC).

a. Grievances Redressed Committee

Grievances Redressed Committee (GRC) will be formulated by the proponent to address the concerns of the locals during the construction phase. The main role of the GRC will be to resolve the issues of the community associated with the proposed project, if any.

5.9 Acceptance Level of the Project

The opinions of the respondents were noted during the public consultation. The majority of respondents (88%) were in favor of the proposed project. They expect that installation of the proposed unit will also increase the economic value of local assets. According to them the proposed project will boost the employment opportunities, mobility access to resources and social amenities.

7. POTENTIAL ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES

6.1 General

The potential environmental impacts related to the proposed project have been studied related to design, location, construction and operational stages of the Project. Environmental protection measures are recommended to eliminate adverse environmental impacts or to reduce them to an acceptable level within the prevailing legislative and regulatory framework.

Impacts are evaluated on the basis of magnitude, immediacy and sustainability. Evaluation criteria are as follows:

Magnitude

Type of impact (direct, indirect, cumulative)

Immediacy

Temporal extent (during construction, after construction)

Spatial extent (local, widespread)

Sustainability and Reversibility

Mitigability (fully, partially)

Monitoring (fully, partially)

The basic purpose of mitigation measures is to reduce the impacts of the establishment of pharmaceutical manufacturing unit on the socio-environment up to the maximum possible extent. The mitigation measures are suggested based on the following parameters:

6.1.1 What is the problem?

The nature of the land is open land. The project is vacant plot in industrial. In addition, to the noise and fugitive dust emissions during the development phase solid waste management and disposal issues may arise along with wastewater disposal issues. There are few minor impacts associated with the operation of manufacturing unit

includes the management of the municipal solid waste generated during the, raw-material storage which will be managed according to local practices of area.

6.1.2 *When problem will occur and when it should be addressed?*

The impacts from the establishment of packaging boxes manufacturing unit will occur during the construction and operation due to the civil work. These issues included; noise generation, fugitive dust emissions, solid waste management, wastewater disposal, top-soil removal, Health and Safety issues and change in the geographic features of the area. These all problems should be addressed on-site where they are being generated, to avoid the residual or adverse impacts.

6.1.3 *Where problem should be addressed?*

The problem will be generated from site development and operation of the unit. So, it should be addressed on source i.e. at site within the same timeframe.

6.1.4 *How the problem should be addressed?*

Proper mitigations measures will be provided according to the nature of the impacts/problems. For example, against dust emissions sprinkling of water may be done on regular basis, for solid waste proper solid waste management and disposal practices may be adopted, to manage liquid waste proper treatment may be made before discharging into the receiving body. The change landscape is estimated to be quite minor and the removed topsoil may be used to reclaim the disturbed areas.

6.2 *Ways of Achieving Mitigation Measures?*

Following ways will be adopted to reduce the impacts of the packaging box manufacturing:

6.2.1 *Changing in Planning Design*

There is no endangered and threatened species present in the project area. Moreover, there is not any human settlement or infra-structure that will be dislocated or dismantled due to the proposed project development. Hence, there is no need to change the design of project.

6.2.2 Improved Management and Monitoring Practices

The anticipated impacts had been reduced significantly by adopting better management activities, as it will be carried out for betterment of the society. While environmental monitoring will be conducted on the regular basis to keep the sources of the air pollution, wastewater generation, noise and public nuisances in-check. Following practices that need to be adopted to reduce the impact significantly:

6.2.3 Replacement/Relocation/Rehabilitation

The proposed project is located in open land where there is no sensitive area, human population or preserved natural resource is present which could be impacted due to the commencement of the proposed project. No replacement, relocation and rehabilitation will be required for the commencement of the aforesaid project.

6.3 Impact Assessment Methodology

The impact assessment methodology for the installation of the packaging boxes manufacturing unit is given below:

6.3.1 Screening of Potential Impacts

Based on site visit, observation, brain storming, provided information and social interviews, significant impacts were anticipated and evaluated. Then qualitative and quantitative (where possible) assessment of these anticipated impacts is to be carried out.

6.3.2 Identification of Mitigation Measures

After anticipation and screening of significant impacts, certain mitigation measures are to be provided in order to enhance benefits of project and reducing impacts. These measures can be classified as:

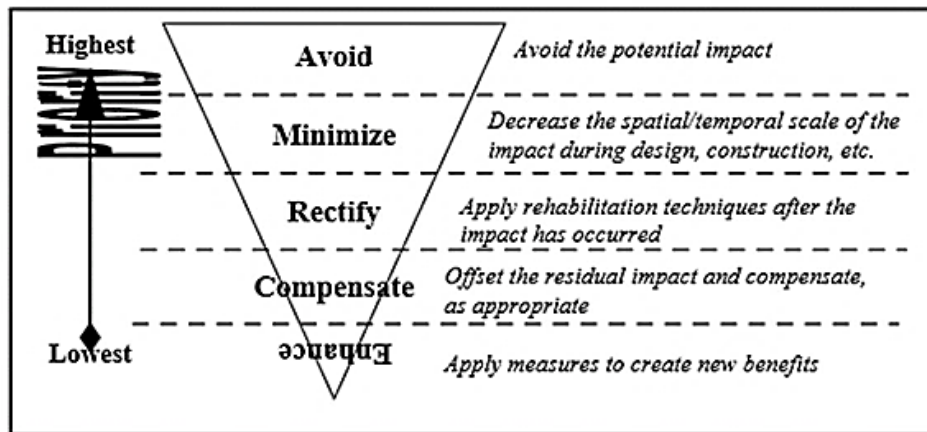


Figure 7-1: Impact Assessment Hierarchy

6.4 Impact Evaluation

Impact screening checklist and project impact evaluation matrix have been developed to evaluate the potential impacts of the establishment of pharmaceutical plant on the basis of set procedures as given in the environmental guidelines by Punjab EPA.

6.4.1 Methodology for Impact Evaluation

These tools have been used to identify the significance and magnitude of the impact as well as the nature, reversibility and extent:

1. An Impact Screening Checklist
2. Project Impact Evaluation Matrix

Following is given a brief description of assessment tools:

a) Impact Screening Checklist

The impact screening checklist is developed to screen out the potentially insignificant environmental and social impacts from the potentially significant adverse environmental and social impacts during planning & designing, construction and operational phases of the project. The objective of the impact screening process is to assess the significance of the issues related to the air, water, noise, soil, transportation, communication, the hazards and external constraints. The positive and adverse impacts of the project during planning & designing, construction and operational phases are identified based on their duration, location, frequency, extent, significance

and reversibility. Each activity impacts on various environmental parameters are given below:

Table 16: Impact Screening Checklist

Sr#	Environmental Component	Impact Characteristics												
		Duration		Location		Frequency		Extent		Significance			Reversibility	
		Long	Short	Direct	Indirect	Cont.	Intermittent	Wide	Local	Large	Moderate	Minor	Rev.	Irrev.
Beneficial Impacts														
	Employment Opportunity	☐		☐		☐			☐		☐		☐	
	Availability of Raw-Material	☐		☐		☐			☐		☐		☐	
	Appreciation in Land Value	☐			☐	☐			☐			☐		☐
	Energy Availability	☐		☐		☐			☐		☐		☐	
Adverse Impacts														
	Air Pollution		●	●			●		●			●	●	

	Wastewater		•	•		•			•			•		•
	Solid Waste and By-Products	•		•		•			•		•			•
	Health and Safety		•		•		•		•			•	•	
	Chemical Hazards		•	•		•			•		•		•	
	Physical Hazards		•	•			•		•			•		•
	Security Risks		•		•		•		•		•		•	

b) Project Impact Evaluation Matrix

The Project Impact Evaluation Matrix was developed by placing different environmental parameters that are likely to be affected by the proposed project actions, grouped into categories i.e., physical, ecological and socio-economic environment. For the impact assessment risk assessment methodology was used. Moreover, the risk assessment was done on the basis of project phases (planning & designing, construction and operation). A Project Impact Evaluation Matrix is attached as Table below:

Table 17: Impact Evaluation Matrix

Environmental Parameters	Impact Assessment during operational Phase
A: Physical	
Land Resources	
Soil Erosion and Contamination	0
Transportation	-1t
Solid Waste and By-Products	-2p
Land Use	NA
Air Resources	
Noise Pollution	-1t
Air Pollution	-2t
Dust Emissions	-1t
Water Resources	
Ground Water	-1p
Surface Water	NA

Wastewater	-2p
B: Ecological	
Flora	
Tree Cutting	+1p
Fauna	
Terrestrial Fauna	+1p
C: Socio-Economic	
Employment Opportunities	+3p
Land Value Appreciation	+2t
Availability of Local Raw-Material	+2p
Economic Uplift	+3p
D: Hazards	
Physical Hazards	-1p
Chemical Hazards	-1p
Health and Safety	-1p
Legends: 1= Low; 2= Medium; 3= High; 4= Extremely High; NA= Not Applicable; t= Temporary; p= Permanent; app= Applicable; 0= Negligible	

6.5 Impacts Associated with Project Location

The proponent has selected the site owing to the following reasons:

- There is no community or human settlement present on-site or in the project as the project site is located at agriculture cum industrial land.

- There is no fauna or flora belonging to an endangered species present on-site
- The site has accessible through road network i.e., connected to the main road via access roads
- There is no ecologically sensitive or declared protected area like; Reserved Forest, Fish Hatcheries, Wildlife or Game Reserves. Moreover, there is no socio-cultural significant structure (historical or archaeological site or religious structures; Masjid, temples, etc.) It can be concluded in view of these reasons that the selected site is best suited for the project and will not pose any adverse impact or threat on any component of the environment.

6.6 Design Related Impacts

The negative impacts related to design of the proposed project will not be significant as the area is industrial having open lands in its proximity / surroundings. The machinery is according to the latest state of art technology. In view of these considerations no environmental problems are foreseen in the context of design. However, the possible impacts of proposed project have been considered and their mitigation measures proposed as under:

6.6.1 Changes in Land value

After the development of proposed project, the land value of area will enhance. It will be minor positive impact.

Mitigation

Not required.

6.6.2 Seismic Hazard

The project is situated in minor damage zone. In this zone distant earthquakes with fundamental periods greater than 1.0 second may cause damage to structures.

Mitigation

The structure of the proposed project has been designed in such a way that the building may withstand moderate to large earthquakes.

6.6.3 Emergency response

There are always chances of earthquakes and other manmade disasters such as fires due to electrical short-circuiting, over heating etc.

Mitigation

The following mitigation measures will be adopted to minimize or eliminate the emergency situations:

- The design of building will also include emergency exits, which can be used during emergency situation.
- Adequate internal and external water distribution system will be designed, which could also supply adequate quantity of water for firefighting during emergency.
- Fire hydrants and firefighting extinguishers will be provided at locations where necessary.

6.7 Impacts During Construction Stage

The potential environmental impacts of the proposed unit along with the mitigation measures during the construction stage of the project have been described as following:

6.7.1 Change in land use

The proposed project site is a vacant plot in the premises of pharmaceutical industry and the area where the project is situated, vacant plot, however industrial units are also located in the near vicinity of the project area.

Mitigation

Proposed project will not impose any major negative impact on the area in view of changes in land use because the proposed site is situated in the premises of working unit as mentioned above.

6.7.2 Impacts on Topography

The construction of the proposed project will not bring major changes in the existing topography of the project site. The changes due to the construction of the unit will be of localized nature. There will be no significant changes offsite the project area.

Mitigation

Not required.

6.7.3 Impacts on Soils

The overall geology and soil quality of the project site is not expected to be adversely impacted due to the execution of the proposed project during the construction period.

Mitigation

Plantation needs to take place at the project site so that soil becomes stabilized.

6.7.4 Impacts on Surface and Ground water

During the construction stage, the sanitary wastewater will be generated by the worker' camp(s).

Mitigation

At project site, the sanitation system already exists which will provide the safe disposal of wastewater produced from workers camp.

6.7.5 Impacts on Air Quality

During construction phase, negligible change will occur in air quality due to the construction machinery used for the development of proposed project.

Mitigation.

No such heavy machinery will be used which has the capacity to change the air quality at project site.

6.7.6 Water Consumption

During construction phase, water will be used for the preparation of the raw material, for watering under-construction buildings and consumption by the workers in various domestic activities. It will cause negative impact on underground water resource. The consumption of the water will be high causing minor negative impact on the water resource of the area. The groundwater may get polluted due to the presence/consumption of the chemicals and petroleum products on-site

Mitigation measures for water

Following mitigation measures will be required for water sources:

- Avoid un-necessary consumption of the water and close the tap when water isn't in use
- Special care will be required to protect the chemicals and petroleum products from spillage and contaminating the ground water sources
- Proper knowledge regarding the watering of the under-construction building should be given to the workers in order to conserve water
- Water efficient equipment and process will be used
- Awareness regarding the water conservation techniques should be carried out
- The wastewater that is being consumed from the use of the labour on-site will be disposed off in the wastewater drains.

6.7.7 Health and Safety of Workers

The construction activities will impose certain negative impacts on health and safety of the workers.

This impact will be minor because the construction volume is small, however mitigation measures will be required to minimize/eliminate health and safety related negative impacts of the project.

Mitigation

Implementation of the following measures will ensure health and safety of the workers during the construction stage:

- The contractor will ensure that the construction workers / laborers are trained in safety procedures for all relevant aspects of construction:
- Proponent of the Project will make regular checks to ensure that the contractor is following safety working procedures/safety measures.
- Formal emergency procedures will be developed for construction site in case of any accident. First aid kits and other necessary equipment will be kept available at site along with the list of emergency phone numbers to be contacted in case of any accident.

6.7.8 Impacts on flora

There are no trees or shrubs present at the proposed project site.

Mitigation

Not required.

6.7.9 Impacts on Fauna

The usual fauna found at the project locality of sparrows, crows, common manias etc. the project will not have any significant impacts on fauna.

Mitigation

Extensive plantation will be done at open places to enhance the beauty of the locality and project site.

6.7.10 Change of Land Appearance/layout

There would be no significant change in the land appearance, as minor execution will be involved in construction activities. The excavated earth material will be used for land filling / uplifting the floor level within the project site.

Mitigation

Not required because the project site is situated in the working unit.

6.7.11 Employment Generation

During construction stage of the proposed project, about 50+ workers/laborers will be engaged. This will be positive change.

Mitigation

Not required.

6.8 IMPACTS DURING OPERATIONAL STAGE

The anticipated environmental impacts related to the proposed Project have been studied for the operational stage as discussed below: -

6.8.1 Impacts on Climate

There will be no negative impacts expected to occur overall on climate of the area during the operational stage of the Project because the production process will be undertaken in the closed chamber machines or vessels. Generators and machinery will be maintained properly and will not impose any negative impacts on climate.

Mitigation

Not required

6.8.2 Employment Generation

When the project will be in full operation, it will generate employment for 250-300 persons. This will be a major positive impact.

6.8.3 Air Quality

During the regular operational stage of the proposed project no emissions will be generated from process however some negligible emissions from stand by generators and machinery will be produced to deal with that cyclones will be installed design and specifications are given in chapter-3.

Mitigation

Schedule of over hauling /maintenance of stand by generator/machinery will be developed.

Cyclone will also be installed at generator/machinery.

5.8.4 Noise

During the operational stage, noise will be generated only from the operation of the stand by generators and in the production hall but to the negligible level. No noisy process will be involved in the proposed project.

Mitigation

The proper foundation of the stand by generator will be constructed to cope with the problem of tremor / vibration which will consequently abate the noise problem.

- ❖ Sound proof canopy and silencer will also be installed.
- ❖ Schedule of over hauling /maintenance of stand by generator will be developed.
- ❖ Proper set back will be provided from the boundary wall, which will also help to minimize / eliminate the noise pollution.
- ❖ Extensive tree plantation along the boundary wall and at open places will also be done to act as sound barrier / sound absorber.

6.8.4 Vapor/Fumes in Production Hall

While in production of the anti-biotic products some negligible fumes may be produced in the production hall. However, all the process will be undertaken in the closed chamber plan.

Mitigation

- ❖ Cyclone will be installed in the production hall to suck the fumes if needed.
- ❖ These vapors or fugitive emissions will be captured into filters.

6.8.5 Water Consumption

During the operational stage of the proposed project water will be used for washrooms, kitchen and process.

Mitigation

At open places the grassy lawns will be developed to recharge the water table, which will also help to control the surface runoff during rainy season. Treated wastewater will be sprinkled inside the industry premises on grassy plots.

6.8.6 Wastewater Generation

During the regular operation of the proposed project wastewater will be produced from different sources as process, kitchen or washrooms, floor washing etc approximately 120liters/day wastewater will be generated.

Mitigation

- ❖ For the treatment of above mentioned, wastewater treatment plant will be installed.
- ❖ The treated wastewater will be sprinkled or used for watering of tree plantation and vegetation within the battery limits of factory.

6.8.7 Solvent Liquid Waste Generation

While operation of unit spent solvent, as liquid waste will also be generating from decontamination of mixing equipment.

Mitigation

Reuse spent solvent liquid waste from equipment decontamination as makeup in subsequent formulations.

6.8.8 Solid Waste Generation

No process solid waste or hazardous waste will be produced. Only plastic drums and packing material will be produced.

Mitigation

Packaging material and plastic drums are saleable items and will be sold to contractors and record will be maintained.

6.8.9 Health and Safety of Workers

The workers especially working in the production hall / area may be at health risk. Because they may be some exposure if they will not be properly trained and provide with Personal Protective Equipments (PPEs). This will be major negative impact if not mitigated properly.

Mitigation

To mitigate the hazards of health and safety of workers the following mitigations measures will be undertaken:

- ❖ No worker aged below 18 years or over 60 years shall be employed for any job involving physical handling of hazardous substances.
- ❖ All workers shall be thoroughly trained in safety precautions for handling hazardous substances and shall be supervised by qualified supervisors.
- ❖ Protective clothing and equipment comprising helmet of cloth cap, safety spectacles of goggles, respirators or masks, rubber or plastic gloves and workboots shall be available for all workers who may be exposed to any hazardous substances, and no worker shall be permitted on job unless and until he is wearing such protective clothing and equipment.
- ❖ To avoid any kind of potential environmental hazards the worker would be trained properly so that they know the potential hazard of chemical.
- ❖ Proper cross ventilation shall be under taken to avoid from any bad smell/odor.
- ❖ There will be proper arrangement to handle accidental / disastrous situation.
- ❖ The instructions for the workers, safety signs and precautionary / preventive measures for the costumers / visitors would be displayed at the suitable / prominent places.
- ❖ Adequate supply of water shall be made available to the workers for their personal washing as well as for washing their protective equipment's.
- ❖ Protective clothing and equipment's of the workers shall be washed and cleaned as often as required to ensure their efficiency.

- ❖ No worker shall be permitted to eat, drink or smoke till he has removed his protective clothing and equipment, washed his hands and face and left the place of work.
- ❖ All firefighting, emergency and safety equipment's shall be frequently checked and properly maintained.
- ❖ First aid medical facilities equipped with required antidotes shall be available in the premises, supervised by trained staff.
- ❖ Medical checkup of all workers shall be carried out at the time of employment and at least once a year thereafter.

6.8.10 Emergency Response

The operation of the proposed unit will handle workers and visitors who may become ill or have work related accidents. In addition, disasters such as earthquakes and fires may occur which have to be considered for minimizing their impacts.

Mitigation

- ❖ An Emergency Response Plan for earthquakes and manmade disasters will be prepared by the project management.
- ❖ Adequate supply of water shall be made available to the worker for personal washing as well as for washing their protective equipment's.
- ❖ All firefighting, emergency and Safety equipment's shall be frequently checked and properly maintained.
- ❖ Proper size and types of portable fire extinguishers will be kept near areas where flammable liquids are handled or stored.
- ❖ Adequate fire suppression system will be installed and properly functioning.
- ❖ The aesthetic conditions / outlook of the unit should be improved by tree plantation / ornamental plants and proper physical infrastructure.
- ❖ Proper disastrous and firefighting arrangements (fire extinguisher, fire hydrants, kits, instruments etc.) shall be ensured at many places of both sites.
- ❖ The internationally recognized health and safety standards will be adopted and the Emergency Response Plan will be developed and implemented in close consultation with the Fire Fighting Department.

6.9 POTENTIAL ENVIRONMENTAL ENHANCEMENT MEASURES

6.9.1 Tree Plantation

Tree plantation within and outside the premises is a potential environmental enhancement measure. A large area will be reserved for tree plantation and among plants native flora like Peepal, Kikar, Dherak, Safeeda and Amaltas will be planted in the specified green zone which will have the maximum capacity to reduce noise pollution and tolerance index of these species are more than 10. Some floral species like roses and other ornamental evergreen plants will also be introduced in the lawn which will enhance aesthetic beauty. In addition, trees like Safeeda and Amaltas will be planted as boundary wall inside the lawn which will look like green wall. The proponent will also make arrangements for protection and maintenance of trees.

6.9.2 Facility Design

The introduction of an ecologically effective and efficient design of a facility is the environmental enhancement measures planned by the proponent to be incorporated into the design of the intended project.

6.9.3 Social Enhancement Measures

Following measures will be adopted to improve the socio-economic condition of the area:

a. Employment/Poverty Alleviation

The employment opportunities in the project area will be increased due to the establishment of proposed project at the aforesaid location. During establishment of the aforesaid facility un-skilled workers will be required as labors, sanitary workers and sweepers as well as for the skilled workers such as; accounts and managers to run the administration office local community will be considered on the priority basis. In totality, the overall economic conditions of the area will be improved due to the establishment of the aforesaid project.

b. Local Economy

The employment opportunities and/or income sources generated by the project construction and operation will be long term in nature. These will be enhanced once the construction phase is completed. The local economy will experience a slight boom during development and operational period.

8. ENVIRONMENTAL MANAGEMENT AND MONITORING PLANS

This chapter summarizes the various mitigation measures as outlined previously in this EIA Report that will be implemented during the construction, operational and decommissioning stages of project. It does not discuss further the mitigation measures which have been adopted within the design and planning of the project, as these are comprehensively covered in previous section of this EIA Report.

Outline and key features of the EMMP for operations phase is presented. As per the environmental legislation in Pakistan, the EMMP for the operations phase, along with other documents, is to be submitted to the environmental protection agency to obtain confirmation for compliance and Environmental Approval for project operation. Even after implementation of the suggested mitigation measures, the impact may remain significant, and require monitoring.

7.1 Objectives

An Environmental Monitoring Plan was outlined alongside Environmental Management Plan to ensure all the corrective actions to counter adverse impacts which gives a detailed EMMP. The EMMP will serve as a principal execution module of the project that would not only mitigate adverse environmental impacts during the construction and the operational phase of the project but also ensures that environmental standards and good in-housekeeping are being practiced. Continuous environmental monitoring is exercised to ensure that preventive measures are in place and effective to sustain environmental integrity. The key objectives of EMMP are:

- ⊙ To outline functions and responsibilities of persons
- ⊙ To state and implement standards and guidelines which are required under environmental legislations particular in context to the Project
- ⊙ To facilitate the implementation of the mitigation measures by providing the technical details of each Project's impact and proposing implementation schedule of the proposed mitigation measures
- ⊙ Define a monitoring mechanism and identify monitoring parameters to ensure that all proposed mitigation measures are completely and effectively implemented

- ⊙ Identify the resources required to implement the EMMP and outline corresponding financing arrangements

7.2 Management Approach

The organizational roles and responsibilities of the key players are summarized below:

7.2.1 Proponent

The project proponent will undertake overall responsibility for compliance with the EMMP. The concerned departments will carry out verification checks to ensure that the contractors are effectively implementing their environmental and social requirements.

7.2.2 Contractors

The contractors will implement the majority of environmental and social mitigation measures. The contractors will carry out field activities as part of the project. The contractors are subject to certain liabilities under the environmental laws of the country, and under its contract with proponent.

7.3 Components of EMMP

The EMMP consists of the following:

- ⊙ Institutional arrangements
- ⊙ Mitigation plan to reduce the severity of associated impacts
- ⊙ Monitoring plan to monitor the impacts and their severity
- ⊙ Environmental and social trainings to raise awareness

7.3.1 Remedial and Mitigation Measures

The objective of remedial and mitigation measures in any project is to identify practices, technologies or activities that would prevent, minimize or mitigate all significant negativities that are likely to occur due to the proposed project.

7.4 Environmental Management and Monitoring Framework

The purpose of the environmental management and monitoring framework is to facilitate the implementation of environmental commitments, included in the environmental impact assessment. The proponent is committed for the protection of the environment and to the sustainable management of its related operations and activities.

Table 18: Environmental Management Plan

Sr. No.	Project Component or Impact	Target	Action	Responsibility
A- Pre-Construction / Design Related				
1	Seismic Hazard Analysis	To project the building structure from seismic hazard	The building will be designed to withstand moderate to large earthquakes	Proponent / Design Consultants
2	Emergency Response	To mitigate the emergency condition	The following mitigation measure will be adopted to minimize or eliminate the emergency situations: - The design of building will also include emergency exists which can be used during emergency situation. - Adequate internal and external water distribution system will be designed, which could also supply adequate quantity of water for firefighting during emergency. - Fire hydrants and firefighting extinguishers will be provided at locations where necessary.	Proponent / Design Consultants

B- Construction Stage				
1	Impacts on soil	To ensure the minimum changes in soil	Plantation needs to take place at the project site so that soil becomes stabilized	Contractor / Proponent
2	Impacts on surface and ground water	To mitigate the problem of contamination of surface and groundwater	At project site, the, sanitation system will be provided for the safe disposal of wastewater produced from workers camp.	Contractor / Proponent
3	Health and Safety of workers and public	To ensure health and safety of workers and public	Implementation of the following measures will ensure health and safety of the workers during the construction stage: - The Contractor will ensure that the construction workers / laborers are trained in safety procedures for all relevant aspects of construction; - Proponents of the Project will make regular checks to ensure that the contractor is following safety working procedures / safety measures. - Formal emergency procedures will be developed for construction site in case of an accident. First aid kits	Contractor / Proponent

			and other necessary equipment will be kept available at site along with the list of emergency phone numbers to be contracted in case of any accident. The safety of the public at all stages of the construction will be ensured through appropriate public education and safety measures such as use of sign boards, barriers and flags and proper illumination at night.	
4	Fauna	To ensure that fauna may be affected at minimum level	Extensive plantation will be done at open places to enhance the beauty of the locality and project site. This will also help to protect fauna, particularly birds.	Factory Management / Proponent
5	Disposal of Mucking Material	To avoid the degradation of soil	- The spoil will be carefully examined and disposed off in an environmental friendly manner by transporting it in closed containers and filling at appropriate sites. - It is also desirable to utilize the muck in such a way that it is consumed for the construction of any other structure within the Project Site or in the immediate vicinity.	Contractor / Proponent

			Utilization of much in the vicinity of the Project Site is considered as the best option for its disposal.	
C- Operational Stage				
1	Air Quality	To avoid the degradation of air quality	In order to minimize air pollution, following mitigation measures are recommended: Schedule of over hauling/maintenance of stand by generator will be developed.	Factory Management / Proponent
2	Vapors/Fumes in Production Hall	To mitigate the vapors/fumes impact in production hall	Cyclone will be installed in the production hall to suck the vapors or fugitive emissions (if needed).	Factory Management / Proponent
3	Noise	To mitigate the Noise problem	- The proper foundation of the stand by generator will be constructed to cope with the problem of tremor / vibration which will consequently abate the noise problem. - Sound proof canopy and silencer will also be installed.	Factory Management / Proponent

			- Schedule of over hauling / maintenance of stand by generator will be developed. - Proper set back will be provided from the boundary wall, which will also help to minimize / eliminate the noise pollution. - Extensive tree plantation along the boundary wall and at open places will also be done to act as sound barrier / sound absorber.	
4	Water Consumption	To mitigate this problem	- At open places the grassy lawns will be developed to recharge the water table, which will also help to control the surface runoff during rainy season. - Treated wastewater will be sprinkled inside the mill premises on grassy plots. However, the area is agricultural in nature, so the maximum rainwater will recharge the water table.	Factory Management / Proponent
5	Wastewater Generation	To mitigate the problem	For the treatment of above mentioned wastewater will be done.	Factory Management / Proponent

			The treated wastewater will be sprinkled or used for watering of tree plantation and vegetation within the battery limits of factory.	
6	Solid Waste Generation	To establish a proper management plan for this solid waste	process solid waste will be produced and it will be transferred to the local recycling facility for paper recycling.	Factory Management / Proponent
7	Health & Safety of Workers	To provide necessary health & safety facilities	To mitigate the hazards of health and safety of workers the following mitigations measures will be undertaken: - No worker aged below 18 years or over 60 years shall be employed for any job involving physical handling of hazardous substances. - All workers shall be thoroughly trained in safety precautions for handling hazardous substances and shall be supervised by qualified supervisors. - Protective clothing and equipment comprising helmet of cloth cap, safety spectacles or goggles, respirators or masks, rubber or plastic gloves and	Factory Management / Proponent

			workboats shall be available for all workers who may be exposed to any hazardous substance, and no worker shall be permitted on job unless and until he is wearing such protective clothing and equipment. • To avoid any potential environmental hazards the workers would be trained properly so that they know the potential hazard of chemical. • Proper cross ventilation shall be undertaken to avoid from any bad smell/odor. • There will be proper arrangement to handle accidental / disastrous situation. • The instructions for the workers, safety signs and precautionary / preventive measures for the costumers / visitors would be displayed at suitable / prominent places. • Adequate supply of water shall be made available to the workers for personal washing as well as for washing their protective equipment's.	
--	--	--	--	--

			• Protective clothing and equipment of the workers shall be washed and cleaned as often as required to ensure their efficiency. • No worker shall be permitted to eat, drink or smoke till he has removed his protective clothing and equipment, washed his hands and face and left the place of work. • All firefighting, emergency and safety equipment's shall be frequently checked and properly maintained. • First aid medical facility equipped with required antidotes shall be available in the premises, supervised by trained staff. • Medical check-up of all workers shall be carried out at the time of employment and at least once a year thereafter.	
8	Emergency Response	To mitigate the problem of emergency situations	• An Emergency Response Plan for earthquakes and man-made disasters will be prepared by the project management.	Factory Management / Proponent

			• Adequate supply of water shall be made available to the workers for personal washing as well as for washing their protective equipment's. • All firefighting, emergency and safety equipment's shall be frequently checked and properly maintained. • Proper size and types of portable fire extinguishers will be kept near areas where flammable liquids are handled or stored. • Adequate fire suppression system will be installed and properly functioning. • The aesthetic conditions / outlook of the unit should be improved by tree plantation / ornamental plants and proper physical infrastructure. • Proper disastrous and firefighting arrangements (fire extinguishers, fire hydrants, kits, instruments etc.) shall be ensured at many places of both sites. • The internationally recognized health and safety standards will be adopted, and the Emergency Response Plan will be developed and implemented	
--	--	--	--	--

			in close consultation with the Fire Fighting Department, Paramedics and Civil Defense.	
--	--	--	--	--

7.4.1 Institutional Arrangements and Responsibilities

The proposed institutional arrangement for the implementation of EMMP is based on the discussions held with the Forest Department, Environmental Protection Department, Local Union Council Office and Proponent. The discussion concluded that three types of institutional arrangements are essential for the effective implementation of EMMP, these are follows:

- ⊙ Establishment of Environment/Social Management Group
- ⊙ External Monitoring by EPA certified laboratory
- ⊙ EMC established by Proponent after consultation with consultant

a) Roles and Responsibilities

Following are the designated roles and responsibilities of the employees involved in the monitoring and management of the adverse impacts:

Table 19: Roles and Responsibilities

Roles and Responsibilities		
Sr#	Concerned Persons	Duties
1	The Project Manager	Following will be the responsibilities of the Project Manager • Ensure that the contractor is aware of all specifications, legal constraints, standards and procedures pertaining to the project specifically with regards to environment. • Ensure that all stipulations within the EMMP are communicated and adhered to by contractor(s) • Monitor the implementation of the EMMP throughout the project by means of site inspections and meetings. This will be documented as part of the minutes of the site meeting documents • Ensuring project execution within defined budget and timelines

		• Conducting regular check of the project status and meetings with project team • Provide support and guidance to project team as and when needed • Project Manager is expected to continually monitor and improve the overall performance of their operation
4	HSE Manager	In addition to the health and safety responsibilities held by staff, managers and supervisors must do whatever is reasonably practical to ensure that both the workplace and the work itself are safe. This includes: • Ensuring that staff are appropriately trained and supervised • Identifying, assessing and managing health and safety risks • Consulting with workers (including staff, affiliates and contractors): iv. Health and safety risk assessments v. Decisions are made about the measures to be taken to eliminate or control these risks vi. Health and safety risk assessments • Implementing health and safety risk management programs relevant to their operations, teaching, research and consulting functions and work environment • Reporting (to the Human Resources Unit), investigating and responding to all hazards, accidents, incidents and taking action to control the risk • Assisting with the development, implementation and maintenance of a return to work program for injured staff. • Be fully conversant with the EIA and conditions of its approval • Be fully conversant with the EMMP

		• Be fully conversant with all relevant environmental legislation, policies and procedures, and ensure compliance • Convey the contents of this document to the contractor site staff and discuss the contents in detail with the Project Manager and Contractor • Undertake regular and comprehensive inspection of the site and surrounding areas in order to monitor compliance with the EMMP • Take appropriate action if the specifications contained in the EMMP are not followed • Monitor and verify that environmental impacts are kept to a minimum, as far as possible • Review and approve construction methods, with input from the Site Manager, where necessary • Ensure that activities on site comply with all relevant environmental legislation • Compile progress reports on regular basis, with input from the Site Manager, for submission to the Project Manager, including a final post excavation audit • Liaise with the Site Manager regarding the monitoring of the site • Report any non-compliance or remedial measures that need to be applied • All environmental problems arising on the construction area will be reported to the Site Manager by the Environmental Manager. Reports on such problems will be submitted to the Project Manager by the Site Manager
--	--	--

7.4.2 Proposed Monitoring Program to Assess Performance or Output of EMP

The following environmental issues are considered to warrant specific management actions for the implementation of project. These issues have specific regulatory requirements (contained in the development consent or Environmental Approval)

and/or are considered to have the potential to result in a non-compliance with a legislative requirement or generate community complaints. To manage the adverse environmental impacts on the physical parameters of the environment following management and monitoring plans will be adopted:

Table 20: Environmental Monitoring and Management Plan

Aspect	Potential Impacts/ Risks	Likely Duration	Magnitude if not Mitigated	Proposed Mitigation Measures	Responsibility	Environmental Budget
<i>A - Pre-Construction/Related</i>						
Changes in land use	Economic gains	Permanent	Minor positive	-	-	
Seismic Hazard	Damage due to earthquake	Permanent	Moderate negative	The structure of the proposed project has been designed in such a way that building may withstand moderate to large earthquakes.	Design Consultant / Proponent	
Emergency Response	There are always changes of earthquakes and other manmade disasters such as fires due to electrical short	Permanent	Minor negative	The following mitigation measures will be adopted to minimize or eliminate	Design Consultant / Proponent	50,000/-

EnvironTech Consultants (Pvt) Ltd.

Office no. 11, Second Floor, Centre Point Plaza, Main Boulevard, Gulberg, Lahore
Contact +92-303-4342302

	circuiting, over heating etc.			the emergency situations: • The design of building will include emergency exits, which can be used during emergency situation. • Adequate internal and external water distribution system will be designed, which could also supply adequate quantity of water for firefighting during emergency. • Fire hydrants and firefighting		
--	--------------------------------------	--	--	---	--	--

				extinguishers will be provided at locations where necessary		
B – Construction Stage						
Aspect	Potential Impacts/ Risks	Likely Duration	Magnitude if not Mitigated	Proposed Mitigation Measures	Responsibility	Environmental Budget
Topography	The construction of the proposed project will not bring major changes in the existing topography of the project site. The changes due to the construction of the unit will be of localized nature. There will be no	-	-	-	-	

	significant changes off-site the project area.					
Impact on Soils	The overall geology and soil quality of the project site is not expected to be adversely impacted due to the execution of the proposed project during the construction period.	Temporary	Minor negative	Plantation needs to take place at the project site so that soil becomes stabilized.	Contractors / Proponent	25,000/-
Impact on surface and groundwater	During the construction stage, the sanitary wastewater will be generated by the workers' camp(s).	Temporary	Moderate negative	At project site, the sanitation system already exists which will provide the safe disposal of wastewater produced from workers camp.	Contractors / Proponent	50,000/-

				The storage of lubricant materials such as oil and grease will be confined to a specific area so that in case of any leakage or spillage, the lubricant materials do not contaminate the entire project site.		
Air Quality	During the construction phase, negligible change will occur in air quality due to the construction machinery used for the development of proposed project.	Temporary	Minor negative	No such heavy machinery will be used, which has capacity to change the air quality radically at project site	Contractor / Proponent	50,000/-

Health and safety of workers and public	The construction activities impose certain negative impacts on health and safety of the workers and public	Temporary	Moderate negative	Implementation of the following measures will ensure health and safety of the workers during the construction stage: - the construction workers / laborers are trained in safety procedures for all relevant aspects of construction; - Proponents of the project will make regular checks to ensure that the contractor is following safety working procedures/safety measure.	Contractor / Proponent	30,000/-
---	--	-----------	-------------------	---	------------------------	----------

				• Formal emergency procedures will be developed for construction site in case of an accident. First aid kits and other necessary equipment will be kept available at site along • The contractor will ensure that • With the list of emergency phone numbers to be contracted in case of any accident.		
Water Consumption	During the construction of project, moderate quantity of water will	-	-	-	-	

	be used because project covers 58050 SFT area.					
Flora	There are no trees or shrubs present at the project site.	-	-	-	-	
Fauna	The usual fauna found in the project area is sparrows, crows, common manias etc. the project will be having any significant impact on fauna.	Permanent	Minor negative	• Extensive plantation will be done at open places to protect birds and to enhance the beauty of the locality and project site.	Proponent	25,000/-
Disposal of Mucking Material	Inevitable cut and fill earthwork operations will open up scars on the land in and around the project site. The Excavated materials that are unsuitable for use need to be stored,	Temporary	Moderate negative	• The spoil will be carefully examined and disposed off in an environmental friendly manner by transporting it in closed containers and filling at	Contractor / Proponent	10,000/-

	transported and disposed off appropriately at the designated sites.			appropriate sites		
Employment Generation	During construction stage of the proposed project about 55 workers / laborers will be engaged. This will be minor positive change.	-	-	-	-	
C- Operational Stage						
Aspect	Potential Impacts/ Risks	Likely Duration	Magnitude if not Mitigated	Proposed Mitigation Measures	Responsibility	
Impact on climate	There will be no negative impacts expected to occur overall on climate of the area during the	-	-	-	-	

	operational stage of the project because the production process will be undertaken in the closed chamber machines. Generators will be kept in closed room and cyclone will be installed to control the emissions hence it will not impose any negative impact on climate.					
Employment Generation	When the project will be in full operation, it will generate employment for 285 persons. This will be a major positive impact.	Permanent	Major Positive	-	-	

Air Quality	During the regular operational stage of the proposed project no emissions will be generated from process however some negligible emissions from stand by generators will be produced which will be within the PEQS because green fuel Natural gas will be used.	Permanent	Moderate negative	•	Schedule of over hauling/ maintenance of stand by generator will be developed.	70,000/-
Vapor/Fumes in Production Hall	While product of the anti-biotic products some negligible fumes may be produced in the production hall. However, all the	Permanent	Negative	• Cyclone will be installed in the production hall if needed. • These vapors or fugitive emissions	Factory Management / Proponent	25,000/-

	process will be undertaken in the closed chamber machinery.			will be captured into wet cotton filters.		
Noise	During the operational stage, noise will be generated only from the operation of the stand by generator. No noisy process will be involved in the proposed project.	Permanent	Moderate negative	- The proper foundation of the stand by generator will be constructed to cope with the problem of tremor / vibration which will consequently abate the noise problem. - Sound proof canopy and silencer will also be installed. - Schedule of over hauling/maintenance of stand by generator will be developed.	Factory Management / Proponent	25,000/-

				• Proper set back will be provided from the boundary wall, which will also help to minimize / eliminate the noise pollution. • Extensive tree plantation along the boundary wall and at open places will be done to act as sound barrier / sound absorber.		
Water Consumption	During the operational stage of the proposed project about water will be used for washrooms, kitchen and process.	Permanent	Negative	• At open places the grassy lawns will be developed to recharge the water table, which will also help to control the	Factory management/ Proponent	

				surface runoff during rainy season		
Wastewater Generation	During the regular operation of the proposed project about wastewater will be produced from different sources as process, kitchen or washrooms, floor washing etc	Permanent	negative	- the treatment of the above-mentioned wastewater will be done. - The treated wastewater will be sprinkled or used for watering of tree plantation and vegetation within the battery limits of factory.	Factory management / Proponent	30,000/-
Solid Waste Generation	No process solid waste or hazardous waste is will be produced. Only plastic drums and packaging material will be produced. The	Permanent	Major negative	process solid waste will be produced and it will be transferred to the local recycling	Factory Management / Proponent	

	dispensary waste will be incinerated thought Shalimar Hospital incinerator.			facility for paper recycling.		70,000/-
Health & Safety of Workers	The workers especially working in the production hall / area may be at health risk. Because they may be some exposure if they will not be properly trained and provide with Personal Protective Equipment's (PPEs). This will be major negative impact if not mitigated properly.	Permanent	Major Negative	To mitigate the hazards of health and safety of workers the following mitigations measures will be undertaken: No worker aged below 18 years or over 60 years shall be employed for any job involving physical handling of hazardous substances.		50,000/-

				• All workers shall be thoroughly trained in safety precautions for handling hazardous substances and shall be supervised by qualified supervisors. • Projective clothing and equipment comprising helmet of the cloth cap, safety spectacles or goggles, respirators or masks, rubber or		
--	--	--	--	--	--	--

				plastic gloves and Workboats shall be available for all workers who may be exposed to any hazardous substance, and no worker shall be permitted on job unless and until he is wearing such protective clothing and equipment. • To avoid any potential environmental hazards the workers would		
--	--	--	--	---	--	--

				be trained properly so that they know potential hazard of chemical. • Proper cross ventilation shall be undertaken to avoid from any bad smell / odor. • First aid medical facility equipped with required antidotes shall be available in the premises, supervised by trained staff. • Medical check-		
--	--	--	--	---	--	--

				up of all workers shall be carried out at the time of employment and at least once a year thereafter.		
Emergency Response	The operation of the proposed unit will involve workers and visitors who may Become ill or have work related accidents. In addition, disasters such as earthquakes and fires may occur which have to be considered for minimizing their impacts.	Permanent	Major negative	- An Emergency Response Plan for earthquakes and manmade disasters will be prepared by the project Management. - Adequate supply of water shall be made available to the workers for	Factory Management / Proponent	30,000/-

				personal washing as well as for washing their projective equipment's. • All firefighting, emergency and safety equipment's shall be frequently checked and properly maintained. Proper size and types of portable fire extinguishers will be kept near areas where		
--	--	--	--	--	--	--

				flammable liquids are handled or stored. • Adequate fire suppression system will be installed and properly functioning. • The aesthetic conditions / outlook of the unit should be improved by tree plantation / ornamental plants and proper physical infrastructure.		
--	--	--	--	--	--	--

				• Proper disastrous and firefighting arrangements (fire extinguishers, fire hydrants, kits, entrustments etc.) shall be ensured at many places of both sites. • The internationally recognized health and safety standards will be adopted, and the Emergency Response Plan will be developed and implemented in		
--	--	--	--	---	--	--

				close consultation with the Fire Fighting Department, Paramedics and Civil Defense.		
--	--	--	--	---	--	--

7.5 Proposed EMP Reporting and Reviewing Procedures

An effective mechanism to store and communicate environmental information during the project is an essential requirement of an EMP.

7.5.1 Meetings

As environment is multidisciplinary subject with environmentalist having a dynamic role therefore Environment Officer would be considered as integral part in both constructional and operational team. Participation of Environment Officer in daily morning meeting and any other special meeting is mandatory. Besides internal meeting HSE Engineer/Environment Officer is also responsible to conduct meeting with local in keeping administration in liaison.

7.5.2 Changes-Record Register

A change-record register will be maintained at the site, in order to document any changes in project design. These changes will be handled through the change management mechanism.

7.6 Impacts and their Mitigation Summary

Environmental and social impacts have been identified for the process of pharmaceutical plant; their impacts had been mitigation by adopting required measures as recommended in EMMP of this EIA Report within the Project Area of Influence. The major impacts on physical, biological and social environment are described as under:

Table 21: Impacts Summary of Modern Printing and Packaging

Environmental Parameters	Impact Assessment during operational Phase
	Operational
A: Physical	
Land Resources	

Soil Erosion and Contamination	0
Transportation	-1t
Solid Waste and By-Products	-2p
Land Use	NA
Air Resources	
Noise Pollution	-1t
Air Pollution	-1t
Dust Emissions	-1t
Water Resources	
Ground Water	-1p
Surface Water	NA
Wastewater	-2p
B : Ecological	
Flora	
Tree Cutting	+1p
Fauna	
Terrestrial Fauna	+1p
C: Socio-Economic	
Employment Opportunities	+3p
Land Value Appreciation	+2t

Availability of Local Raw-Material	+2p	
Economic Uplift	+3p	
D: Hazards		
Physical Hazards	-1p	
Chemical Hazards	-1p	
Health and Safety	-1p	
<i>Legends: 1= Low; 2= Medium; 3= High; 4= Extremely High; NA= Not Applicable; t= Temporary; p= Permanent; app= Applicable; 0= Negligible</i>		

7.7 Equipment Maintenance Details

The Client and Contractor will be responsible to maintain equipment with higher efficiency and in good working conditions. The equipment will be maintained twice a year as well as monthly inspection will be done on the regular basis to keep the process going without any interruption.

7.8 Environmental Budget

The environmental budget for the project is PKR 5 lacs which will be used for the control of the air pollution by the installation of dust collection system, tree plantation at various designated sites, EMMP for the operational phase and monitoring of environmental parameters (such as ambient air, noise and wastewater). The total cost of the project is PKR 18 million. EMMP and the monitoring will be carried out on the regular basis. So, more than 1% of the total project cost will be allocated for the environmental protection. Cost Breakup is given in front of each entity in table 15: Environmental Monitoring and Management Plan.

Table 22: Schedule for Implementation of Environmental Budget

Schedule for Implementation of Environmental Budget			
Construction Phase			
Parameter	Frequency	Schedule for Implementation	Responsibilities
Solid waste	Fortnight	Visual check to access the disposal methods	Contractor and supervisor
Vehicular Exhaust gases	Monthly	Instrumental measurement	Contractor and supervisor, Reporting to EPA
Ground water quality and wastewater	Annually	Monitoring of water and wastewater parameters	Contractor and supervisor, Reporting to EPA
Health and safety	Monthly	Monitoring of health and safety of workers	Contractor and supervisor, Reporting to EPA
Operational Phase			
Parameter	Frequency	Schedule for Implementation	Responsibility
Air Quality	Quarterly	Ambient air quality and Scrubber Maintenance	Administration of project and Reporting to EPA
Noise	Quarterly	Noise by activities in the multi-purpose building	Administration
Surface and ground water	Bi-Annually	Monitoring of water and wastewater parameters defined by EPA	Administration and Reporting to EPA
Solid waste	Quarterly	Waste generation	Administration of the project

9. CONCLUSION AND RECOMMENDATIONS

The findings of EIA Report showed that although the establishment of pharmaceutical plant is expected to have significant negative impacts on the environment during the construction and operational phases, but the severity of these adverse impacts can be reduced significantly by adopting the suggested mitigation measures in EMMP with true spirit. Moreover, their severity can be further reduced by adopting relative mitigation measures as proposed in the Chapter 7 of this EIA Report. The impacts were assessed by frequent site visits, studying related projects and by reviewing relevant documents. Generally, the project is planned to follow efficient environmental management systems. Specific environmental and social benefits have been mentioned below which depend on the proper application of mitigation measures suggested in EMMP and best engineering practices.

8.1 Merits and Demerits

The major positive impacts include;

- ⊙ **Increased job opportunities,**
- ⊙ **Business opportunities,**
- ⊙ **Availability of the locals.**
- ⊙ **Environmental enhancement through tree plantation.**

The project will raise the income of the persons directly associated with project as well as it will also improve the socio-economic status of the area. The project is expected to stimulate the local economies of the community as the majority of the people living in the nearby areas are associated with the labor related activities.

In general, potential adverse environmental effects resulting from the proposed activities will be temporary in nature, short-term and of low magnitude. Through application of standards, recommended mitigation measures, adherence to applicable permit conditions and regulations, adverse impacts can be effectively minimized. The project is not likely to have significant adverse environmental impacts which cannot be mitigated. Negligible negative impacts that are likely occur during pharmaceutical plant processing includes; air pollution due to movements of vehicles, removal of bushes and shrubs, potential impact to the local water resources and social impacts

may affect the locals residing in the nearby community can be foreseen. Mitigation measures will be implemented to minimize environmental impacts though they are still negligible. There are certain mitigations suggested to cater for the aforesaid issues.

8.2 Recommendations

The intensity and severity of impacts occurred due to the pharmaceutical plant processing varies with change in the nature and magnitude of the project as well as depends upon the baseline environmental conditions of the area. The mitigation measures will require constant information flow and consultation with the stakeholders to ensure the least adverse social-economic impact to outweigh the “no project development” scenario.

- ☒ **The adverse environmental impacts can be reduced significantly by adopting best management and monitoring practices as well as by implementation EMMP with true spirit**
- ☒ **Proper PPEs including aprons, rubber gloves and shoes should be provided to workers**
- ☒ **No compromise on public health and environment should be allowed.**
- ☒ **Waste minimization practices should be introduced to workers by conducting lectures on spot to aware the workers about the long-term benefits of the same in lieu of surrounding environment.**
- ☒ **A proper tree plantation plan should also be developed in order to make the process environment friendly.**
- ☒ **Small domestic waste storage bins should be placed at different locations for proper collection and disposal of the solid waste.**
- ☒ **It is recommended that the Proponent should obtain an Environmental Approval (NOC) from the Punjab-EPA before proceeding further.**

GLOSSARY

Aesthetic	Concerned with beauty or appreciation of beauty.
Agency	A business or organization providing a particular service on behalf of another business, person, or group.
Climate	The weather conditions prevailing in an area in general or over a long period.
Consultant	A person who provides professional advice or services to companies for fee.
Construction Waste	Waste generated from the buildings and construction industry and includes material like bricks, concrete, tiles, debris, ceramics and more.
Convention	An agreement between states covering particular matters, especially one less formal than a treaty.
Demographic	A single vital or social statistic of a human population, as the number of births or deaths.
Ecology	The branch of biology that deals with the relations of organisms to one another and to their physical surroundings.
Endangered species	A species of animal or plant that is seriously at risk of extinction.
Environment	Relationship of natural world (human beings, animals and plants) with physical surroundings (air, land, water).
Excavation	Excavation is the act or process of digging, especially when something specific is being removed from the ground. Archaeologists use excavation to find artifacts and fossils.
Framework	A framework is a real or conceptual structure intended to serve as a support or guide for the building of something that expands the structure into something useful.

Hazardous Waste	Hazardous Waste is waste that poses substantial or potential threats to public health or environment.
Livelihood	A set of activities involving Securing the basic necessities –food, water, shelter and clothing of life.
Municipal Waste	Municipal Solid Waste (MSW) –more commonly known as trash or garbage –consists of everyday items we use and then throw away, such as product packaging, grass clippings, furniture, clothing, bottles, food scraps, newspapers, appliances, paint, and batteries. This comes from our homes, schools, hospitals, and businesses.
Nature	The phenomena of the physical world collectively, including plants, animals, the landscape, and other features and products of the earth, as opposed to humans or human creations.
Penicillin's	The term "penicillin" is defined as the natural product of Penicillium mould with antimicrobial activity.
Pharmaceutical Industry	The pharmaceutical industry is the part of the healthcare sector that deals with medications
Preservation	Preservation is the strict setting aside of natural resources to prevent the use or contact by humans or by human intervention. In terms of policy making this often means setting aside areas as nature reserves (otherwise known as wildlife reserves), parks, or other conservation areas.
Proponent	A person who advocates a theory, proposal, or course of action.
Rehabilitation	To restore to a condition of good health, ability to work, or the like.
Resettlement	The settlement of people in a different place.

Resource	A stock or supply of money, materials, staff, and other assets that can be drawn on by a person or organization in order to function effectively.
Sanitation	Conditions relating to public health, especially the provision of clean drinking water and adequate sewage disposal.
Stakeholder	A stakeholder is a party that has an interest in a company and can either affect or be affected by the business. The primary stakeholders in a typical corporation are its investors, employees and customers.
Topography	Topography is the study of the shape and features of the surface of the Earth and other observable astronomical objects including planets, moons, and asteroids.
Vaccines	A substance used to stimulate the production of antibodies and provide immunity against one or several diseases, prepared from the causative agent of a disease, its products, or a synthetic substitute, treated to act as an antigen without inducing the disease
Vegetation	Plants considered collectively, especially those found in a particular area or habitat.

LIST OF ABBREVIATIONS

ABBREVIATION	DESCRIPTION
ASR	Air Sensitive Receivers
BDL	Below Detection Limit
BOD	Bio-chemical Oxygen Demand
CC	Construction Contractor
CDM	Clean Development Mechanism
CO	Carbon Monoxide
COD	Chemical Oxygen Demand
DCO	District Co-ordination Officer
DD	Deputy Director
DG	Directorate General
DRR	Disaster Risk Reduction
DWQS	Drinking Water Quality Standards
EE	Environmental Engineer
EIA	Environmental Impact Assessment
EMMP Plan	Environmental Management and Monitoring
EPA	Environment Protection Agency
EPC	Engineering Procurement Construction
EPD	Environment Protection Department
EPHE	Environmental & Public Health Engineering
FGDs	Focused Group Discussion
GDP	Gross Domestic Product
gm	Gram
GoP	Government of Pakistan
IEE	Initial Environmental Examination
LGO	Local Government Ordinance
LDL	Lowest Detection Limit
mg/l	Milligrams per liter
MSL	Mean Sea Level

NCS	National Conservation Strategy
NEQS	National Environmental Quality Standards
NEP	National Environmental Policy
NO2	Nitrogen Dioxide
NOC	No Objection Certificate
OH & S	Occupational Health and Safety
PAPs	Project Affected Persons
PEPA	Pakistan Environmental Protection Act
PEPC	Pakistan Environmental Protection Council
PEQS	Punjab Environmental Quality Standards
PM	Particulate Matter
SO2	Sulfur Dioxide
SOP	Standard Operating Procedures
SWM	Solid Waste Management
TA	Technical Assistance
TORs	Terms of Reference
TSS	Total Suspended Solids
UNDP	United Nation Development Pro
WASA	Water and Sanitation Agency

LIST OF PEOPLE CONSULTED AND THEIR VIEWS

SR. NO.	NAME	ID CARD NUMBER	OCCUPATION	CONCERN/VIEWS
1.	Ghulam Shabir	36303-7360882-5	farmer	Positive
2.	Ansar Ali	34101-5615463-9	Farmer	Positive
3.	Liaqat Ali	34101-527.5075-1	Farmer	Positive
4.	Abdul Rehman	34102-0434594-7	Shop Owner	Concerned about air pollution
5.	Muhammad Bilal	36303-9299987-3	Shop Owner	Concerned about Noise pollution
6.	Muhammad Yousaf	36302-5965175-3	Daily Wager	Positive
7.	Muhammad Asif	36303-4107290-1	Daily Wager	Positive
8.	Muhammad Iqbal	36303-1561962-1	Vendor	Positive
9.	Abdul Hameed	36302-0474840-7	Vendor	Positive
10.	Muhammad Imran	42201-3691562-7	Daily Wager	Positive
11.	Muhammad Sabir	36303-9221124-3	Vendor	Concerned noise pollution
12.	Muhammad Shahid	36306-4248907-7	School Teacher	Wastewater should be properly treated prior to final disposal in nearby drain
13.	Sohail Ahmad	35304-8398428-1	Field Officer Horticulture department	Plantation should be carried out at extensive scale

SOURCES OF DATA

- ✚ <http://www.weather-and-climate.com/>
- ✚ <https://crestmakerspace.pk/printing-industry-cardboard/>
- ✚ <https://www.businessbook.pk/category/packaging-and-printing-4769>.
- ✚ <https://tdap.gov.pk/wp-content/uploads/2022/04/Packaging-Sector-of-Pakistan-brief-converted.pdf>
- ✚ https://www.pacra.com/sector_research/Paper%20and%20Packaging%20Sector%20PACRA_1604587222.pdf
- ✚ Twede, D., Selke, S. E., Kamdem, D. P., & Shires, D. (2014). *Cartons, crates and corrugated board: handbook of paper and wood packaging technology*. DEStech Publications, Inc.
- ✚ Field Surveys
- ✚ Public Consultations

TERMS OF REFERENCE (TORS)

MODERN PRINTING AND PACKAGING, 45 KM MULTAN ROAD NATHY KHALISA, TEHSIL PATTOKI, DISTRICT KASUR

1.1 PROJECT PROPONENT:

Syed Muhammad Raza Jilani S/O Syed Abdul Razaq Jilani

1.2 SCOPE OF WORK:

Mr. Syed Muhammad Raza Jilani intends to establish a **Modern Printing And Packaging** unit in Kasur.

1.3 SPECIFIC OBJECTIVES:

The EIA shall be carried out with an objective of identifying environmental impacts during change in Land use of the Master Plan. The specific objectives will be as follows:

- Identification of impacts on physical environment including land, water, and air and suggesting mitigation measures.
- Identification of impacts on biological environment including flora, fauna and natural habitat and suggesting mitigation measures.
- Identification of impacts on socio-economic environment in the vicinity of the proposed landfill site and suggesting mitigation measure.
- Mitigation measures for potential impacts (Physical, Biological and Socio-environmental)
- Environmental Management and Monitoring Plan/ Contingency Measures

1.4 THE EIA SHALL COVER FOLLOWING MAIN AREAS:

- Background of the project – Justification
- Objectives
- Site locations and mappings
- Complete description of the proposed sites

- Collection, analysis and presentation of baseline data
- Identification of significant environmental issues
- Assessment of direct, indirect and cumulative impacts on environment
- Mitigation measures to minimize predicted adverse impacts
- Assessment of public perception about proposed project
- Meeting with the stakeholders and their perception
- Review of the relevant Policies, Legislation and Regulations
- Monitoring plan
- Conclusions

1.5 MAJOR TASKS:

The consultant shall be responsible for undertaking the following tasks in EIA study.

1.5.1 Collection and collation of Secondary Information:

Prior to the start of field activities, available secondary data and reports will be reviewed in detail.

1.5.2 Analysis of Alternative:

Suitable site alternative will be suggested, if required, by the review of relevant maps, available secondary data and legal review.

1.5.3 Location Alternative:

Alternative site will be suggested, if required, by using relevant maps and GPS during area visits.

1.5.4 Management and Operational Alternatives:

Management and operational alternatives will be suggested, if required, by the review of institutional set-ups of departments relevant to the project.

1.5.5 Design Alternatives:

Design alternatives will be suggested, if required, by the review of current design layout.

1.5.6 Review of Relevant Environmental Laws:

The Consultants will carefully review the national/local authority laws, Pakistan Environmental Protection Act 1997, Forest Act 1930, Land Acquisition Act 1874 etc. and international regulations like World Bank Operational Policy, Cites Act etc. for conducting EIA study. This approach will eliminate any chances of the rejection of the project by the concerned EPA due to the consideration of all the concerned laws during the preparation of the EIA report.

1.5.7 Collection of existing Environmental setting/baseline Data:

Based on the desk study and reconnaissance survey, checklist and questionnaires / Performa's will be prepared for the baseline surveys. Consultants will proceed to the site and the collection of primary data /database on the environmental aspects will be done, which includes the following:

1.5.8 Physical resources:

Physiographic, topography and soils, atmosphere, climate, hydrology, surface water, ground water, geology, seismology etc including environmental monitoring and testing.

1.5.9 Environmental Monitoring:

In case of the absence of updated data, one-time limited environmental monitoring will be conducted in order to assess and analyze the existing level of particulate and gaseous emissions, potable water and liquid from any existing sources lying within the Study Area.

The environmental monitoring and testing will be carried out through EPA approved Environmental Laboratory.

1.5.10 Ecological resources:

Identification of the number of tree species present in the project area, as well as, determination of tree density and area covered by them. Tree counting and their identification along with other vegetation and crops, if any, will be done by making field visits, and by the review of the available literature relevant to the study. Information about the flora and fauna of the area will be

collected. Information of the type of the livestock in the area will be noted along with their density.

1.5.11 Socio-economic survey:

Data on social and cultural conditions of the study area will be collected. Determination of the population density in the study area will be done by the review of district census report. The social survey also includes Land acquisition survey (if required) and Identification of vulnerable people/groups i.e. Project Affected People, if any. Data about population density, Infrastructure (electricity, sanitation/ drainage facilities, mode of transportation), health and education status will be collected. Data collection about number of schools and hospitals in the area, if any; no. of graveyards in the area, if any; no. of recreational and commercial areas, if any; availability of utilities; and strata of socio-economic group of people dominant in the area will be kept in focus during baseline study..

1.5.12 Evaluation / Identification of Potential Impacts:

Prediction and assessment of the proposed Project's likely negative impacts during the construction and operational stages will be carried out by conducting the field visits of project and study area. The impacts will be discussed in three sectors with reference to the following parameters:

1.5.13 Physical environment:

Under physical environment, impacts on following areas will be measured.

- **Land resources:** Evaluation of the environmental effects of the project on land use in the immediate vicinity of the project (i.e. within the identified boundaries of the project) will be done, e.g. Agriculture, Archaeological, Historical and Cultural monuments
- **Water resources:** Precipitation, surface water resources, ground water resources.

- **Air quality:** levels of air pollutants like particulate matter, CO and other parameters and their adverse impacts, if any, on the surrounding environment will be determined to evaluate its effects.
- **Noise levels** will be evaluated for the construction and operational phase of the project

1.5.14 Ecological environment:

Impacts on ecological environment may include

- Impacts on fauna of area, livestock and migratory birds (if any)
- Reserved forests, if any.
- Relocation/resettlement issues etc.
- Impacts on flora

1.5.15 Socio-economic Impacts:

- Impacts on livelihood of Project Affected Persons (PAPs) (if any): Questionnaires will be developed and prepared and filled during the field visits to know about the public perception of the study area.
- Impacts on social settings of the project area.
- Relocation/ resettlement issues
- Impacts of the project on local property values and insurance rates will be taken in to consideration.
- Disruption archaeological, historic, religious, and unique natural values in the project area if any

1.5.16 Suggested Mitigation/contingency Measures:

After the identification of the adverse environmental impacts, necessary mitigation measures would be proposed. Mitigation plans will be proposed based on the intensity of each impact. For instance, if the impact is low enough, it may be ignored; if the impact is high, specific mitigation measures will be recommended/suggested and if the impact is medium, it may need some mitigation measures or simply be monitored/managed properly in order to ensure that it remains within the acceptable limits.

1.5.17 Environmental Management Plan (EMP):

An Environmental Management Plan (EMP) will be developed. EMP will propose a plan of action that will indicate the responsibilities and required measures to minimize the negative environmental effects of the project at different stages.

Under the EMP, institutional set up will be studied and the required enhancement, which is deemed necessary for effective management and monitoring of the environmental activities, will be proposed. The EMP will address the following aspects:

- Organizational structure and responsibilities;
- Mitigation Plan;
- Environmental Monitoring Plan;
- Communication and documentation;
- Training of Staff;
- Environmental Cost;

1.5.18 Stakeholder participation and consultation:

Consultation is required at least during two stages of the EIA process as follows:

- During the process of the EIA Study and report preparation, the public is consulted through meetings, seminars, or workshops. Proponents will hold public meetings and/or open houses in local communities to describe the details of the project and to receive feedback on potential issues, interests or concerns related to the project. Engagement may also include informal discussions with landowners and nearby residents and meetings with community associations, businesses, municipal councils, regional planning agencies, public interest group's communities.
- Once the draft EIA report has been prepared & submitted then public hearing is required. The consultants shall fully assist the Client in the public hearing, including furnishing the replies/information to the questions/issues raised during the hearing.

1.5.19 Deliverables Consultant:

1. Complete Draft EIA report featuring all the development sites. The EIA report shall be completed in respect of baseline data, detail socio and environmental impact assessment, Environmental Management Plan and Alternatives considered.
2. Final EIA Report to be submitted after receiving comments from Clients.

1.6 Time Duration:

The time duration for completion of whole study is 2 months.

1.7 SCOPE OF WORK; Client:

The client has following scope of Work

1. Give all data related to the current and proposed Land use of the sites.
2. Give all the detail maps of the sites.
3. Give coordinates of all the sites
4. Give detail description of the area.
5. Land use Study for the sites.
6. Arrange Stakeholders consultation along with Consultants
7. Submission of EIA report in EPA and its follow-up until award of NOC.

PROJECT TEAM

Name of expert	Position held	Highest Qualification
Kamal Ahmed Cheema	Chief Environmentalist	M. Phil. Environmental Economics, PIDE, Islamabad
Arslan Iqbal	Environmentalism-2	MPhil Environmental Sciences, UOL
Amna Hafeez	Environmentalism-3	M.Sc Mountain Conservation and Watershed Management, University of the Punjab
Rahma Butt	Environmentalism-4	BS (Hons) Environmental Science, Lahore College for Women University.

File Tracking No.
CHECKLIST (EIA)
PAK EPA GUIDELINES FOR PREPARATION AND REVIEW OF ENVIRONMENTAL
REPORTS, 1997

Required Content	EIA Report		
	PAGE NO.	REMARKS (If Any)	LACKING
Executive summary:			
1. Title and location of project	01		
2. Name of the proponent	02		
3. Name of the organization preparing the report	02		
4. A brief outline of the proposal (type, process, technology and land requirement)	03		
5. The major impacts	04		
6. Recommendations for mitigation measures	04		
7. Proposed monitoring	06		
Introduction:			
1. Purpose of report	24		
2. Identification of project and proponent	21		
3. Details of consultant	23		
4. Brief description of nature, size, and location of project	18		
Screening: Whether the Project requires IEE or EIA as per Regulations	26		
Scoping			
1. Spatial and Temporal Boundaries of Environmental Assessment	26		

2. Important issues and concerns raised during consultation	27		
3. Significant impacts and factors to be determined	27		
Consideration of Alternatives			
1. Site alternatives, their selection and rejection criteria	28		
2. Design/Technology alternatives, their selection and rejection criteria	28		
3. Environmental Alternatives, their selection and rejection criteria	29		
4. Economic Alternatives, their selection and rejection criteria	29		
Description of the project:			
1. Objectives of Project	31		
2. Location and Site Layout of the project (May be annexed at the end of report)	31		
3. Land use on the site	32		
4. Road access	32		
5. Vegetation features of the site	32		
6. Cost and Magnitude of operation	38		
7. Schedule of implementation	39		
8. Description of the project (Process flow chart/steps, Technology, Raw material and products, by-products)	40		
9. Restoration and rehabilitation plans	51		
Description of Environment:			
Clear-cut picture of existing environmental resources:			

1. Baseline Physical Environment	54		
2. Baseline Ecological Environment	59		
3. Baseline Socioeconomic Environment	65		
4. Lab reports of environmental analyses (along with soil tests, geo-investigation in case of building projects and industries)	--	Attached as Annexure	
5. Suitability of the site (not prohibited, environmentally sensitive, incompatible to surroundings and unsuitable)	70		
Impact Assessment			
1. Methodologies for impact identifications (One/more)			
✓ Checklists	85		
✓ Matrices	87		
✓ Networks	NA		
✓ Overlays	NA		
✓ GIS and Computer expert systems	23	Project Site Analysis has been through Google Earth.	
2. Characteristics of impacts (nature, magnitude, extent and location, timing, duration, reversibility, risk)	89		
Screening of potential Environmental Impacts and mitigation measures on/during:			
1. Project location	88		
2. Design	89		

3. Construction phase	90		
4. Operational phase	94		
5. Potential Environmental Enhancement Measures	99		
Environmental management and monitoring program			
i. Description of proposed mitigation actions along with:	142		
ii. Schedule for implementation and Environmental budget	144		
iii. Environmental Management Team along with their Roles and responsibilities (by name or position)	114		
iv. Proposed monitoring program to assess performance or output of EMP	116		
v. Proposed EMP reporting and reviewing procedures	142		
vi. Any training needs required to ensure implementation of EMP and Monitoring plans	-		
Required Content	EIA Report		
	PAGE NO.	REMARKS (If Any)	LACKING
Stakeholders Consultation: Communicate the possible impacts and concerns to the following to assist further analysis and decision making:			
i. Proponent's Environment Management Team	71		

ii. The responsible authority	74		
iii. Other departments and agencies	76		
iv. Environmental practitioners and experts	77		
v. Affected and wider community	77		
Appendices			
1. Glossary	148		
2. List of abbreviations	151		
3. Lists of individuals and organizations consulted along with their written feedback	153		
4. Sources of data and a full list of all reference material used	154		
5. Terms of references of environmental reports and those given to individual specialists	155		
6. List of names, qualifications and roles of team members carrying out the IEE/EIA study	162		
7. Approvals from other concerned departments		Attached as an Annexure	