

EXECUTIVE SUMMARY

This executive summary presents an overview of the main findings of the Environmental Impact Asspment (EIA) report for the proposed project named as **Establishment of Municipal Solid Waste Disposal Dump Site by M/s Zakwan Builders & Developers (Pvt.) Limited** under Scheme of Suthra Punjab, located Near Gulshan Colony Road, Chak No. 20/3-R, Tehsil Haroonabad, District Bahawalnagar. The proposed project will involve taking over MC Haroonabad machinery and human resource under an agreement with **Bahawalpur Waste Management Company (BWMC)** and setting up of dump facility for municipal solid waste disposal (non-hazardous waste) at the proposed project location. Total area for the proposed project will be 97.50 Kanals.

The project will involve storage transportation and dumping of Municipal Solid Waste (non-hazardous waste) from residential areas and industries aiming its proper management by taking over machinery & human resource of MC Haroonabad. It will include the construction of administrative block, waste storage area, and construction of the Dump facilities.

NAME OF PROPONENT:

Proponent: Abdul Hanan Wahid S/o Mian Abdul Wahid

Designation: Chief Executive Officer (CEO)

Address: Dakhana Haroonabad, Chak No. 73/4.R, Tehsil
Haroonabad, District Bahawalnagar.

NAME OF THE ORGANIZATION PREPARING THE REPORT:

Consultant Details	
Consultant	EHS Services Pvt. Ltd.
Address	House No.#12, Street No.#06, V-Lane Cavalry Ground Extension, Lahore Cantt
Focal Person	
Name	Engr. Muhammad Asif

Contact No.

0304-4404111, 0345-3122696

A BRIEF OUTLINE OF PROPOSAL

The proposed project is the management of Municipal Solid Waste including its disposal, storage and transportation near Gulshan Colony Road, Chak No. 20/3-R, Tehsil Haroonabad, District Bahawalnagar under an agreement with BWMC and taking over charge of machinery and human resource of MC Haroonabad.

As per Initial Environmental Examination (IEE) /Environmental Impact Assessment (EIA) Regulations 2022 the project falls in the category of **Schedule-II** (List of projects requiring an EIA) of **Sub-section G(1)** which deals with Waste Storage & Disposal i.e Landfill sites.

PROJECT'S SALIENT FEATURES

The salient features of project are as follows:

Cost of the Project:	PKR-50 Millions
Project Area:	97.50 Kanals
Nature of Land:	No Current Use of Land/ Open Land
Source of Power:	MEPCO & Generator
Source of Water:	Ground Water
Water Requirements:	2m ³ /Day
Raw Material:	Domestic/Residential Solid Waste (Non-Hazardous Waste)
Type of Wastewater:	Domestic sewage

OBJECTIVES OF THE PROJECT

The objectives of the proposed project are:

- To Dump the municipal solid waste (non-hazardous waste)
- To protect the general public
- To prevent scavenging of non-hazardous risk waste.

The proposed site is establishment of Municipal Solid Waste Disposal Dump Facility, located Near Gulshan Colony Road, Chak No. 20/3-R, Tehsil Haroonabad, District Bahawalnagar.

EXISTING ENVIRONMENTAL CONDITIONS

For the purpose of this report, environmental and social baseline data and conditions at/around the project site has been studied. The data has been gathered from sources of information included consultation with project proponent, private visits, field surveys, desktop studies, existing information sources. Interviews with people near the project area has been conducted to collect their opinion regarding the proposed project and after finding it has been concluded that the project will not have any major adverse impacts on the socio-economic environment of the existing community. Moreover, the project will pose the positive impacts in terms of employment opportunities as it will create jobs during construction and operation and will contribute to the nation economy by meeting the demand. Also, the non-hazardous waste of residential area will be dumped to reduce the load of waste.

MAJOR IMPACTS AND RECOMMENDED MITIGATION MEASURES

Keeping in view, all the findings of the baseline study, and through general observation and desktop study, and understanding of the activities and processes involved in the project, environmental impacts have been anticipated. Following impact assessment methodology; i.e. defining the criteria for evaluation of the impacts, identification of mitigation measures (all possible options), evaluation of the residual impacts and identification of the monitoring requirements, adequate and effective mitigation measures have been proposed for all construction and operation related likely environmental impacts of the project. These mitigation measures have

been proposed in order of attempts to eliminate or minimize the impact, provide some compensation or rehabilitate the environment by some means.

The criteria of classification of the impacts as being important, middle or weak are according to:

1. Size and geographical extent
2. Duration and Frequency
3. Irreversibility
4. Ecological context

The major impacts foreseen during construction and operation phase of the proposed extension project are as following:

Table 1: Major Impacts and Recommended Mitigation Measures

Sr. No.	Major Impacts	Mitigation Measures
Construction Phase		
1.	Air pollution may occur be due to exhaust emissions during Construction	Water suppression and covered transportation and storage of the construction materials.
2.	Noise may be produced due to construction, transportation activities (transportation of raw materials)	Avoiding or reducing noisy activities or limiting the noise sources far away from the sensitive areas.
3.	Land contamination may occur due to improper disposal of waste.	Proper waste management plan should be followed during construction phase
4.	Water Pollution due to improper discharge of waste water.	Water treatment should be done before its final disposal into main drain.
5.	Health and safety issues to workers during construction	Provision of Personal Protective equipment, good housekeeping and training of workers.
Operation Phase		
1.	Improper disposal of solid waste	Waste will not be disposed off in the open and onsite burning of waste materials will be eliminated. However, the proposed project itself involves the proper waste management by dumping.
2.	Noise may be produced due to operation & transportation activities.	Generator and vehicles used during the operation will be properly tuned and maintained to minimize noise and air

		emission.
3.	Contaminated water may be disposed off into municipal drains of nearest area.	Domestic wastewater, after proper collection into septic Tank will be discharged into sewage line.
4.	Air pollution may occur be due to exhaust emissions.	Dust emission will be it will be emitted to water sprinkling.
5.	Health and safety issues to workers	Provision of Personal Protective equipment, good housekeeping and training of workers.
6.	Accidental spill of waste during transportation may cause land pollution	Transportation vehicles will be maintained in good conditions to avoid the chances of accidents. There will be a proper mechanical department where maintenance of machinery and vehicles will be monitored regularly.

PROPOSED MONITORING

Monitoring at the proposed sites has been conducted for ambient air, Noise level and water and the reports demonstrated that results are within the limits prescribed by PEQs (2016). The values of these parameters are present in baseline study of project.

ENVIRONMENTAL MANAGEMENT & MONITORING PLANS

For the effective implementation and management of the mitigation measures, an environmental management plan has been prepared. The EMP satisfies the requirement of Pakistan Environmental Protection Act. The EMP outlines the aims and objectives, defines the responsibilities of the project owners and contractors and lays down the required communication, reporting procedures and mechanism through which the proposed measures will be monitored.

Environmental impact of a project is worked out using various factors and parameters, so that an Environmental Management Plan can be evolved to take mitigation measures, wherever these might be considered necessary in order of appropriateness of elimination, reduction and compensation as the goals. The development of the EMP is to make some person responsible for implementing the mitigation measures as identified so that smooth implementation of the mitigation measures can be assured. Monitoring plans have also been included to ensure the compliance of the EMP by

contractors and other responsible authorities. These plans have been included in Chapter-6 of the report.

Environmental management approach for the project has been presented for the design, construction and operation phase and to mitigate the adverse impacts during the design, construction and operation phase essential mitigation measures have been recommended and for their sound implementation an Environmental Management Plan (EMPs) has been framed out.

Table 2: Proposed Management and Monitoring Plan

Sr. No.	Impact	Project activity	Monitoring Mechanism	Frequency	Monitoring Authority
Construction and Operational Phase					
1.	Air emissions and dust	Air quality will deteriorate due to transportation and construction activities	Monitoring for the air quality as per PEQS, 2016	Quarterly	Proponent/ Contractor
2.	Water pollution	Water quality will deteriorate due to construction and operational activities	Monitoring for waste water & drinking water quality as per EPA PEQS, 2016.	Quarterly	Proponent/ Contractor
3.	Noise pollution	Construction activities, utilities and transportation activities	Monitoring for noise level as per PEQS, 2016	Quarterly	Proponent/ Contractor

STRUCTURE OF THE REPORT

Chapter 1: **Introduction** briefly presents the brief outline of the project, major impacts, and recommendations for mitigation measures and proposed monitoring.

Chapter 2: **Description of the Project** furnishes project related information such as location, cost, size and major components.

Chapter 3: **Consideration of Alternatives** contains a description and evaluation of the various alternatives that were under consideration and a justification for selecting the proposed system.

Chapter 4: **Environmental Baseline Profile** establishes baseline conditions for physical, biological and socio-economic conditions prevalent in the project area.

Chapter 5: **Stakeholder / Public Participation** identify the main stakeholders and their concerns raised through scoping sessions, and deals with the measures to mitigate the social impacts.

Chapter 6: **Anticipated Environmental Impacts and Mitigation Measures** identifies, predicts and evaluates impacts of the project activities before and during the construction and operation stages and deals with the measures proposed to mitigate potential environmental impacts of the project.

Chapter7: **Environmental Management and Monitoring Plan** outlines institutional arrangements for the implementation of the proposed mitigation measures, training needs of the staff for implementation of the mitigation measures, monitoring requirements, monitoring cost etc.

Chapter 8: **Conclusion and Recommendations**

TABLE OF CONTENTS

EXECUTIVE SUMMARY	I
TABLE OF CONTENTS	VIII
ANNEXURES	XIV
CHAPTER I.....	15
INTRODUCTION	15
1.0 PURPOSE OF THE REPORT	15
1.1 IDENTIFICATION OF THE PROJECT	15
1.2 IDENTIFICATION OF THE PROPONENT.....	16
1.3 DETAILS OF CONSULTANT	16
1.4 BRIEF DESCRIPTION OF NATURE, SIZE AND LOCATION OF PROJECT	16
LOCATION OF PROJECT.....	16
1.5 ECO-FRIENDLY FEATURES OF THE PROJECT.....	17
1.6 METHODOLOGY FOR ENVIRONMENTAL IMPACT ASSESSMENT (EIA)	17
1.6.1 LITERATURE REVIEW/BASELINE.....	18
1.6.2 SITE VISITS.....	18
1.6.3 PROJECT SPECIFIC DATA.....	18
1.6.4 IMPACT IDENTIFICATION AND ASSESSMENT.....	18
1.6.5 MITIGATION MEASURES AND EMMP.....	19
1.7 SCREENING	19
1.8 SCOPING	19
1.8.1 Introduction.....	19
1.8.2 GUIDING PRINCIPLES FOR CARRYING OUT THE SCOPING STAGE	20
1.8.3 OBJECTIVES	20
1.8.4 LEGISLATION AND GUIDELINES DECIDED TO BE FOLLOWED FOR THE EIA/IEE.....	20
1.8.5 EIA Report Content	21
1.8.6 BASELINE ENVIRONMENTAL INFORMATION THAT WOULD BE INCLUDED IN THE EIA/IEE REPORT	21
CHAPTER II.....	24
DESCRIPTION OF THE PROJECT	24
2.1 TYPE AND CATEGORY OF THE PROJECT	24
2.2 OBJECTIVES OF THE PROJECT	24
2.3 ALTERNATIVES CONSIDERED.....	24
2.4 LOCATION PLAN/ MAP	25

2.5	LAND USE ON THE SITE:	25
2.6	ROAD ACCESS	25
2.7	VEGETATION FEATURES OF THE SITE	26
2.8	COST AND MAGNITUDE OF OPERATION	26
2.9	SCHEDULE OF IMPLEMENTATION	26
2.10	DESCRIPTION OF THE PROJECT.....	27
2.10.1	TECHNOLOGY AND MECHANIRY USED ON SITE.....	27
2.10.2	Management of hazardous & non-hazardous waste.....	28
2.10.3	Design and Installation of incinerator.....	31
2.10.4	Scope of work.....	31
2.10.5	Main features.....	31
	SALIENT FEATURES	34
2.11	UTILITIES	35
2.11.1	Water Requirement and wastewater management.....	35
	WATER REQUIREMENT AND WASTEWATERGENERATION	35
2.11.2	Solid Waste genertaion and management	36
	ASH DISPOSAL PLAN	37
2.11.2	Manpower.....	37
2.11.3	Electricity.....	37
2.12	HEALTH, SAFETY & HYGIENE.....	38
2.13	RESTORATION AND REHABILITATION PLAN	39
2.14	GOVERNMENT APPROVALS.....	39
	CHAPTER III.....	40
	CONSIDERATION OF ALTERNATIVES.....	40
3.1	ALTERNATIVE I – No DEVELOPMENT OPTION.....	40
3.2	ALTERNATIVE II- SITE ALTERNATIVE	41
3.2.1	ZONING OR IDENTIFICATION OF LAND OF PRIME IMPORTANCE	42
3.2.2	SITES OF SPECIAL CULTURAL OR HISTORICAL INTEREST.....	42
3.2.3	AREAS OF LAND WITH CONSTRAINTS UPON DEVELOPMENT – LAND LIABLE TO FLOODING ETC.	42
3.3	TECHNOLOGY ALTERNATIVE	42
3.3.1	Steam autoclaving.....	43
3.3.2	Microwaving	44
3.3.3	Chemical Treatment.....	45
3.3.4	Thermal systems	45
3.3.5	Land disposal.....	46
3.4	CONCLUSION	46

CHAPTER IV	48
DESCRIPTION OF THE ENVIRONMENT	48
4.1 GENERAL.....	48
4.2 PHYSICAL ENVIRONMENT	49
4.2.1 Topography	49
4.2.2 Geological Formation	50
4.2.3 Soil	50
4.2.4 Climate.....	51
TABLE 4.1: TEMPERATURE AND PRECIPITATION.....	51
FIGURE 4.4: AVERAGE MONTHLY PRECIPITATION (MM)	52
FIGURE 4.5: WIND SPEED	53
4.2.5 Water Resources	55
4.2.6 Noise Level.....	57
4.2.7 Seismology	57
4.3 ECOLOGICAL ENVIRONMENT	58
4.3.1 Flora	58
TABLE 4.3: COMMON TREES & PLANTS OF STUDY AREA	59
TABLE 4.4: COMMON GRASSES OF STUDY AREA	59
TABLE 4.5: MAJOR SHRUBS AND HERBS OF STUDY AREA	59
4.3.2 Fauna	60
A. MAMMALS	60
B. BIRDS	60
TABLE 4.6: MAJOR BIRDS PRESENT IN STUDY AREA	60
4.4 SOCIO ECONOMIC ASSESSMENT.....	61
4.4.1 Demographic Profile of BAHWALPUR	62
4.4.2 Health facilities.....	62
4.4.3 Educational Facilities.....	62
4.4.4 Transportation and Communication	63
4.4.5 Industrial Activities.....	63
4.4.7 Water Supply	63
4.4.8 Electric Supply.....	63
4.4.9 Telephone Facilities.....	64
4.4.10 Infrastructure	64
4.5 QUALITY OF LIFE VALUES.....	64

CHAPTER FIVE	66
INVOLVEMENT OF STAKEHOLDER/ PUBLIC CONSULTATION	66
5.1 SOCIAL IMPACT ASSESSMENT.....	66
5.2 OBJECTIVES	66
5.3 STAKEHOLDERS CONSULTATION.....	66
5.4 IDENTIFICATION OF STAKEHOLDERS:.....	67
PROONENT	67
RESPONSIBLE AUTHORITY	67
OTHER DEPARTMENTS AND AGENCIES	68
ENVIRONMENTAL PRACTITIONERS AND EXPERTS	68
TARGET POPULATION.....	68
5.5 METHODS OF PUBLIC CONSULTATION.....	68
5.5.1 STUDY AREA	69
5.5.2 STUDY SIZE	69
5.5.3 STUDY INSTRUMENT	72
5.6 RESULTS OF SOCIO-ECONOMIC DATA COLLECTION	73
5.7 RESULTS	74
5.7.1. Demographic profile.....	74
5.7.2. Socioeconomic and health status	77
5.7.3. anticipated environmental impacts.....	80
5.8 MAJOR FINDINGS	83
5.9 STAKEHOLDER CONCERNS AND RECOMMENDATIONS	83
SOCIAL MANAGEMENT PLAN	84
5.10 CONCLUSION	85
CHAPTER VI	87
ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES	87
6.1 GENERAL.....	87
6.2 OBJECTIVES.....	87
6.3 IMPACT ASSESSMENT METHODOLOGY.....	87
6.3.1 SCREENING OF POTENTIAL IMPACTS	87
POTENTIAL ENVIRONMENTAL IMPACTS OF THE PROPOSED PROJECT	88
6.3.2 IMPACTS ANALYSIS AND PREDICTION	91
6.3.3 IDENTIFICATION OF MITIGATION MEASURES	91
6.3.4 EVALUATION OF THE RESIDUAL IMPACTS.....	91
6.3.5 IDENTIFICATION OF MONITORING REQUIREMENTS	91
6.4 ANTICIPATED POTENTIAL ENVIRONMENTAL IMPACTS	91
6.4.1 NOTION OF SIGNIFICANCE	93

6.5	mitigation and impact assesment	94
6.5.1	PURPOSE OF MITIGATION MEASURES	94
6.5.2	WAYS OF ACHIEVING MITIGATION MEASURES	95
6.6	ENVIRONMENTAL PROBLEMS DUE TO PROJECT LOCATION	95
6.7	ENVIRONMENTAL PROBLEMS DUE TO PROJECT DESIGN	97
6.8	ENVIRONMENTAL PROBLEMS DUE TO PROJECT CONSTRUCTION.....	99
6.8.1	IMPACTS ON PHYSICAL ENVIRONMENT	99
a.	Loss of Vegetation Cover / Biodiversity	99
B.	AIR QUALITY.....	99
C.	NOISE GENERATION	100
D.	WATER RESOURCES	101
E.	SOIL EROSION.....	102
F.	SOLID WASTE GENERATION.....	102
G.	WASTEWATER GENERATION	103
H.	HEALTH AND SAFETY	104
6.8.2	IMPACS ON SOCIO-ECONOMIC ENVIRONMENT	105
A.	Economic Activity.....	105
B.	Lifestyle and Culture	105
6.8.3	IMPACT ON BIOLOGICAL ENVIRONMENT	105
6.9	ENVIRONMENTAL IMPACTS DURING OPERATIONAL PHASE	105
6.9.1	IMPACTS ON PHYSICAL ENVIRONMENT	106
a.	AIR QUALITY/PARTICULATE MATTER (DUST)	106
ASSESSMENT OF IMPACT.....		106
	Dust Emissions.....	106
	Gaseous Emissions	107
B.	EFFLUENT DISPOSAL	108
C.	SOLID WASTE MANAGEMNET.....	108
	Storage of Waste	108
	disposal of Ash.....	109
D.	ENERGY CONSERVATION	110
E.	NOISE LEVEL.....	110
F.	TRANSPORTATION.....	111
G.	EMERGENCY/FIRE HAZARDS	111
H.	TRAINING OF STAFF	111
6.9.2	IMPACTS ON BIOLOGICAL ENVIRONMENT	112
A.	FLORA	112
B.	FAUNA	112
6.9.3	IMPACTS ON SOCIO-ECONOMIC ENVIRONMENT	112

A.	SAFETY	112
B.	LAND VALUE	113
C.	RESETTLEMENT ISSUES.....	113
6.10	IMPACTS ASSOCIATED WITH DECOMMISSIONINGPHASE	114
6.10.1	IMPACT ON PHYSICAL ENVIRONMENT	114
A.	Soil Disturbance	114
B.	Solid Waste Generation	114
C.	Health and SafetyImpacts	114
5.11	POTENTIAL ENVIRONMENTAL ENHANCEMENTMEASURES	115
CHAPTER VII		118
ENVIRONMENTAL MANGEMENT AND MONITORING PLANS		118
7.1	GENERAL.....	118
7.2	EMMP CONTEXT	119
7.3	OBJECTIVES OF ENVIRONMENTAL MANAGEMENT PLAN	119
7.4	ENVIRONMENTAL POLICY	119
7.5	MANAGEMENT APPROACH	120
7.6	COMPONENTS OF THE EMP	120
7.7	INSTITUTIONAL CAPACITY	121
7.8	ENVIRONMENTAL MANAGEMENT AND MONITORING PLAN STRUCTURE AND RESPONSIBILITY.....	122
7.9	TRAINING SCHEDULES.....	124
7.10	ENVIRONMENT MANAGEMENT PLAN.....	125
7.10.1	Environmental Management Plan for M/S Dump Site Zakwan Builders & Developers (Pvt.) Ltd.	125
7.11	ENVIRONMENTAL MONITORING PLAN	135
7.12	EQUIPMENT MAINTENANCE DETAIL	139
7.13	ENVIRONMENTAL BUDGET.....	139
CHAPTER VIII		141
CONCLUSION AND RECOMMENDATIONS.....		141
8.1	CONCLUSION	141
8.2	RECOMMENDATIONS	142

ANNEXURES

Annexure I	Glossary
Annexure II	List of Abbreviation
Annexure III	Social Survey Questionnaires
Annexure IV	References
Annexure V	TORs
Annexure VI	EIA Team Profile
Annexure VII	Process flow
Annexure VIII	Design of Annexure
Annexure IX	Maps

CHAPTER I

INTRODUCTION

1.0 PURPOSE OF THE REPORT

The main objectives of this EIA study are:

- To determine and document the state of the environment of the project area and establish a baseline in order to assess the suitability of the Proposed Project in that area.
- To identify pre-construction, construction and operation activities with their consequential impacts on environment.
- Provide assistance to the proponent for planning, designing and implementing the project in a way that would eliminate or minimize the negative impact on the biophysical and socio-economic environment and maximizing the benefits to all parties in cost effective manner.
- To present Mitigation and Monitoring Plan for smooth implementation of the suggested mitigation measures.
- To provide opportunity to the public for understanding the project and its impacts on the community and their environment through public consultation.
- To prepare an EIA Report for submission at the Environmental Protection Agency, Punjab for according Environmental Approval.

1.1 IDENTIFICATION OF THE PROJECT

The proposed project is the management of Domestic/Residential Solid waste (Non-Hazardous Waste) including its disposal, storage and transportation. According to projects categorization for environmental assessment studies, the proposed project falls under **Schedule-II** for Environmental Impact Assessment (EIA). It falls under the **Sub-category G(1)** of the Pakistan Review of IEE and EIA Regulations, 2022 which deals with “Waste disposal and storage of hazardous or toxic wastes including landfill sites and incineration of hospital toxic waste”.

1.2 IDENTIFICATION OF THE PROPONENT

Contact Person: Abdul Hanan Wahid

Address: Dakhana Hroonabad, Chak No. 73/4R, Tehsil Haroonabad, District Bahwalanagr.

1.3 DETAILS OF CONSULTANT

Consultant Details	
Consultant	EHS Services Pvt. Ltd.
Address	House No.#12, Street No.#06, V-Lane Cavalry Ground Extension, Lahore Cantt
Focal Person	
Name	Engr. Muhammad Asif
Contact No.	0304-4404111, 0345-3122696

1.4 BRIEF DESCRIPTION OF NATURE, SIZE AND LOCATION OF PROJECT

NATURE:

The proposed project is management of Municipal Solid Waste (Non-Hazardous Waste) including its disposal, storage and transportation using environmental friendly techniques. The 16 dump cells will have the operating capacity up to 213 ton per day.

LOCATION OF PROJECT

The proposed project is located near Gulshan Colony Road, Chak No. 20/3-R, Tehsil Haroonabad, District Bahawalnagar. The proposed dump site establishment is planned in an open land, surrounded by the fields. The project site is connected to other areas through Haroonabad Road.

SIZE:

Total Cost of project is approximately 50 Million PKR including land cost 5 Million, infrastructure cost 15 Million PKR approx. and machinery cost 30 Million PKR approx. Establishment of dump site by M/s Zakwan Builders & Developers (Pvt.) Limited has planned to provide the basic facilities for the project after taking over machinery and human resource of MC Haroonabad. Provision of necessities including access routes and infrastructure for provision of telecommunication services will be developed to meet the future demand. Adequate open space is planned to be provided for developing green belts and area of plantation.

1.5 ECO-FRIENDLY FEATURES OF THE PROJECT

In its truest form, sustainability is a three-prong strategy involving environmental, social and economic requirements. Special feature of the project that add eco-friendly and sustainability element to its overall execution process are the absence of any sensitive or protected area within the impact zone of project site. The nearby residential area named as Jagger Abbaspur is located 1km away, Basti Khokhran is located at an aerial distance of 2.1km and Tibbi Izzat is located at an aerial distance of 2.6km away from the proposed project site, hence taking care of the safety aspects of general community. Moreover, the water requirement will be only for drinking and domestic purposes so the water consumption in the unit will not going to affect the water supply of the nearby areas. The proponent will obtain water from the ground water table through developing a piping network for water extraction. There are no surface water bodies within the 1000m surrounding area of the proposed site. There is no reserved forest or protected area within the 1000m of the proposed site.

1.6 METHODOLOGY FOR ENVIRONMENTAL IMPACT ASSESMENT (EIA)

This Environmental Impact Assessment is based on methodology provided in the EPA notified guidelines for preparation of EIA report. Initially the baseline of the project area was developed by gathering secondary data, records and information on existing physical and social, and ecological environment. The primary data for the purpose of this EIA report was generated through monitoring and laboratory testing of environmental parameters. The changes expected in the critical environmental aspects

e.g. in the parameters like ambient air, noise, socioeconomic indicators that may be significant with a positive or negative attribution were identified. Subsequent mitigation, management and monitoring measures have been drafted accordingly. This EIA report presents the existing baseline situation and the environmental aspects involving Eco environmental waste management's current infrastructure for the proposed venture. The EIA study has adopted the following methodology for report compilation:

1.6.1 LITERATURE REVIEW/BASELINE

Exiting publications and previous IEE/EIA reports with relevance to the proposed project were studied. In addition, the legislative framework governing the process of EIA and environmental approval were reviewed to ensure that all the parameters are met.

1.6.2 SITE VISITS

This study is based on the finding of the field visits conducted by the team of EHS. Team members visited the location and neighborhood to perform reconnaissance survey and to gather primary baseline information with reference to environmental and social aspects. Site visits have been done with respect to environmental as well as social aspect evaluation. Questionnaires were distributed among the general public to obtain their view point regarding the proposed project.

1.6.3 PROJECT SPECIFIC DATA

The information related to the project and its infrastructure has been provided by the proponent.

1.6.4 IMPACT IDENTIFICATION AND ASSESSMENT

A categorical assessment of environmental impacts associated with the proposed project with respect to environment and socioeconomic and ecological aspects has been conducted.

1.6.5 MITIGATION MEASURES AND EMMP

Impact assessment has been supplemented by the incorporating mitigation measures to lessen severity of impacts and to manage different activities within the outline of environmental management and monitoring plan. The EMMP is provided to facilitate the proponent in establishing an environmental conscious system that supports conservation at all levels of its construction and operation.

1.7 SCREENING

Screening is an essential part of an EIA process. Screening often results in a categorization of the project and from this a decision is made on whether or not a full EIA is to be carried out. The EPA Punjab has provided a layout for the screening process. Under the Regulations for Review of IEE/EIA, 2022, the EPA Punjab has provided Schedule I and II which categorize projects into IEE and EIA. For this project of construction unit of Dump Site Zakwan Builders & Developers (Pvt.) Ltd. the same Schedules were consulted. According to the Schedules the proposed project falls under SCHEDULE II (List of projects requiring an EIA) the project falls in the G(1) which deals with “Waste disposal and storage of hazardous or toxic wastes including landfill sites and incineration of hospital toxic waste”.

1.8 SCOPING

1.8.1 INTRODUCTION

Scoping is the stage in EIA at which issues, impacts and preliminary alternatives are determined that should be addressed at subsequent stages. It directly follows the screening stage and is a systematic exercise that establishes the boundaries and Terms of Reference (TOR's) for the EIA. A quality scoping study reduces the risk of including inappropriate components or excluding components which should be addressed. While scoping has been defined by many different terms, the definition adopted in recent guidance on project EIA, developed for the European Commission, sets out its meaning in its broadest sense as follows: “Scoping is the process of determining the content and extent of the matters which should be covered in the environmental information to be submitted to a competent authority for projects which are subject to EIA/IEE.” (European Commission, 2001)

1.8.2 GUIDING PRINCIPLES FOR CARRYING OUT THE SCOPING STAGE

The guiding principle for the proposed scoping stage is the emphasis on anticipated environmental impacts and affected people. The scoping session was initiated at the EIA planning stage to include all relevant stakeholders in the study. This helped in defining the boundaries for field assessment of environmental and social parameters.

1.8.3 OBJECTIVES

The key objectives of this scoping are to:

- Inform the public about the proposed project
- Identify main stakeholders and their concerns and values
- Define reasonable and practical alternatives to be addressed
- Focus the important issues and significant impacts to be addressed in the EIA report
- Define the boundaries in time, space and subject matter
- Set requirements for the collection of baseline and other information
- Establish the Terms of Reference (TOR's) for the EIA study

1.8.4 LEGISLATION AND GUIDELINES DECIDED TO BE FOLLOWED FOR THE EIA/IEE

EPA Punjab has established laws and regulations for environmental assessment studied. These legislations include:

- Punjab Environmental Protection Act, 1997 (Amended 2017)
- Punjab Environmental Quality Standards 2016

In addition to the legislative framework, there are certain guidelines notified by the Pakistan Environmental Protection Agency which provide a standard course of actions to be pursued during such studies. These guidelines are:

- Guidelines for the Preparation and Review of Environmental Reports
- Guidelines for Public Consultation
- Guidelines for Solid Waste Management
- Environmental, Health, and Safety General Guidelines of the World Bank Group.

1.8.5 EIA REPORT CONTENT

The content of the EIA report for the proposed project will be as according:

1. Introduction
2. Description of the Project
3. Consideration of Alternatives
4. Description of the Environment
5. Involvement of Stakeholder/ Public Consultation
6. Screening of Potential Environmental Impacts and Mitigation Measures
7. Environmental Management and Monitoring Plan
8. Conclusions

1.8.6 BASELINE ENVIRONMENTAL INFORMATION THAT WOULD BE INCLUDED IN THE EIA/IEE REPORT

Physical Resources:

1. atmosphere (e.g. air quality and climate)
2. topography and soils
3. surface water
4. groundwater
5. geology / seismology

Ecological Resources

1. fisheries
2. aquatic biology
3. wildlife
4. forests
5. rare or endangered species
6. protected areas

Economic Development

1. industries


2. infrastructure facilities (e.g. water supply, sewerage, flood control)
3. transportation (e.g. roads, harbors, airports, and navigation)
4. land use (e.g. dedicated area uses)
5. power sources and transmission
6. agricultural development
7. mineral development
8. tourism facilities

Social and Cultural Resources

1. population and communities (e.g. numbers, locations, composition, employment)
2. health facilities
3. education facilities
4. socio-economic conditions (e.g. community structure, family structure, social wellbeing)
5. physical or cultural heritage
6. current use of lands and resources for traditional purposes by Indigenous Peoples
7. Structures or sites that are of historical, archaeological, paleontological, or architectural significance.

The proposed EIA will use checklist and matrices for impact identification during construction and operational phases. The impacts due to design and location of the project will also be assessed for the proposed project. Laboratory testing will be done to obtain information on the baseline environmental parameters.

Figure 1.1: EIA Process Flowchart

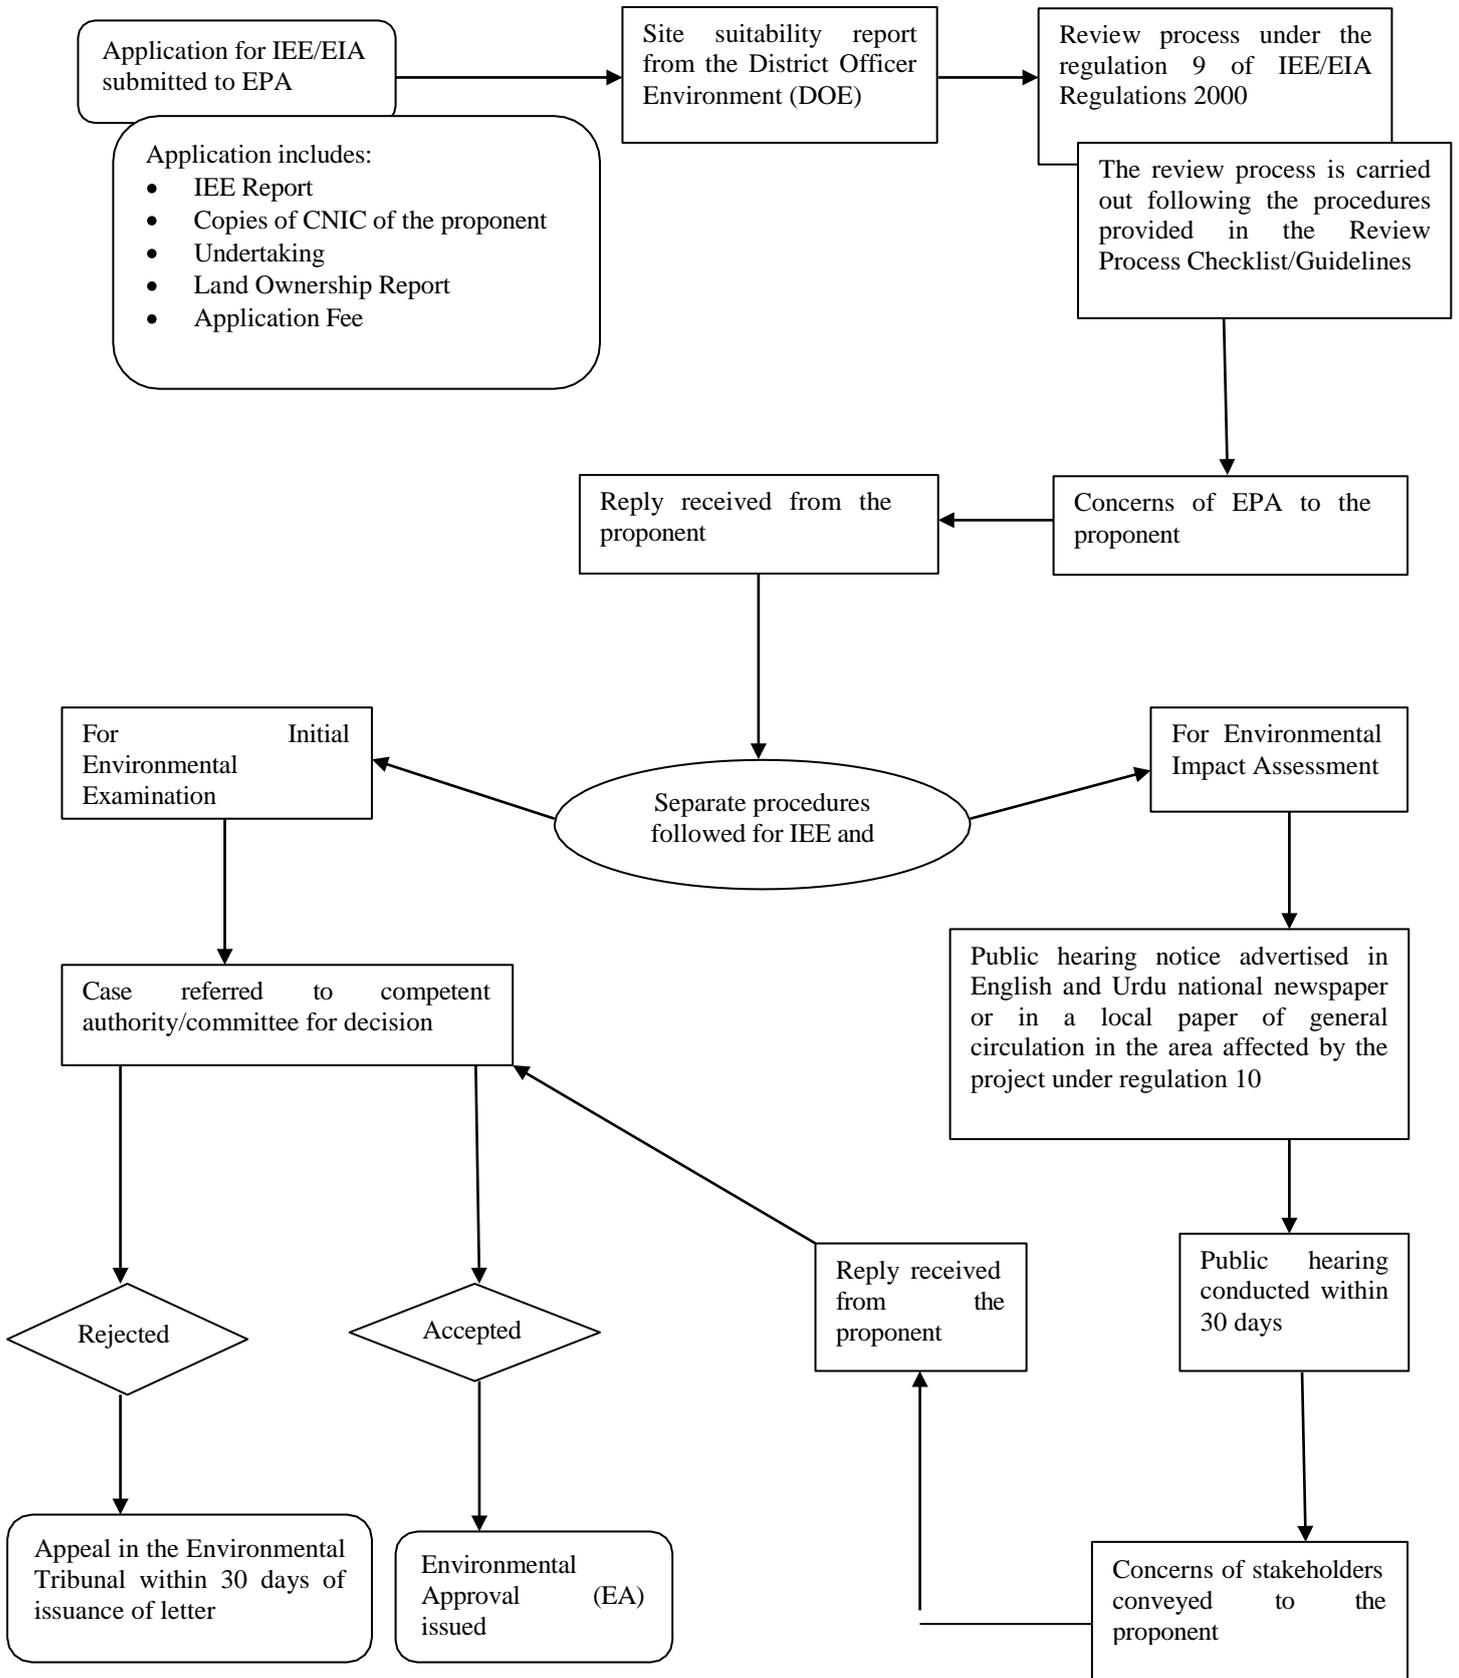

CHAPTER II

DESCRIPTION OF THE PROJECT

2.1 TYPE AND CATEGORY OF THE PROJECT

According to projects categorization for environmental assessment studies, the proposed project falls under **Schedule-II** for Environmental Impact Assessment (EIA) **Sub-category G(1)** of the IEE/EIA Regulation 2022 mentions that “**Landfill Sites**” is to be considered under this particular Schedule. This report is required to fulfill the legal requirements set under section 12 of the Punjab Environmental Protection Act, 1997 (Amended 2017). According to the Punjab Environmental Protection Act 1997 (Amended 2017) and its interpretation as per Review of IEE & EIA Regulations, 2022 for filling, review and approval of environmental assessments, the project is categorized in the Schedule-II for EIA, of PEPA, Regulations, 2022, requiring Environmental Impact Assessment (EIA).

This chapter of the study renders a detailed account of the project and its salient features, such as location, processes and activities involved during various phases of the project life cycle.

2.2 OBJECTIVES OF THE PROJECT

Objectives of said project in nut shell are as following;

- To Dump the Municipal Solid Waste (non-hazardous waste).
- To protect the public.
- To prevent scavenging of non-hazardous risk waste.

2.3 ALTERNATIVES CONSIDERED

The alternatives considered for the current project are discussed in chapter 3 in detail.

2.4 LOCATION PLAN/ MAP

The proposed project is located near Gulshan Colony Road, Chak No. 20/3-R, Tehsil Haroonabad, District Bahawalnagar. The coordinates of the M/S Dump Site Zakwan Builders & Developers (Pvt.) Ltd. are as under:

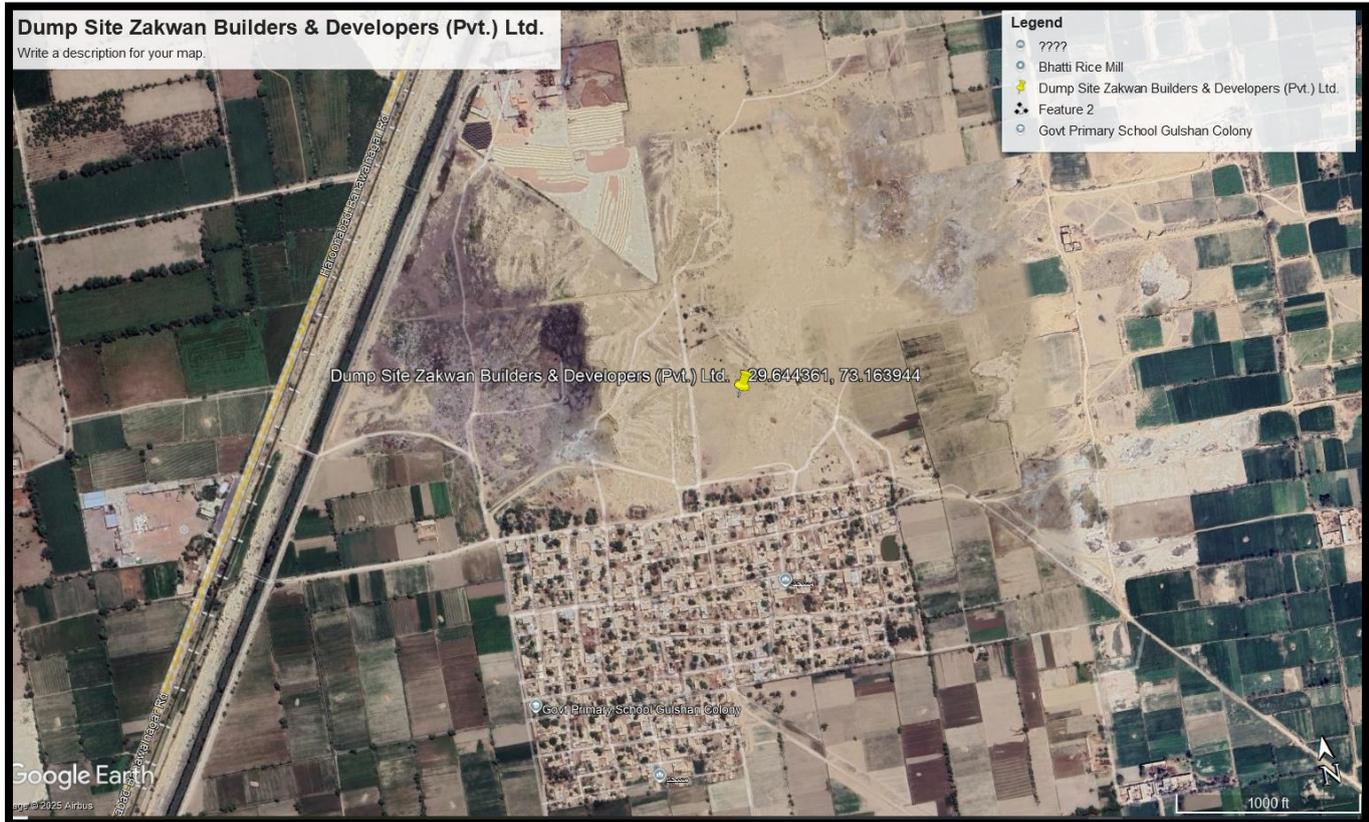


Figure 2.1: Google Earth Showing Proposed Project Site Location

Site layout map for the proposed project is attached as Annex-9.

2.5 LAND USE ON THE SITE:

The site is currently an open land and there is no construction been started yet. The land is already owned by the proponent.

2.6 ROAD ACCESS:

The project site is connected to other areas with metaled roads. Haroonabad road majorly connects the project site to other areas. The map showing the road network of area is annexed as Annex-9.

2.7 VEGETATION FEATURES OF THE SITE:

The land was previously an agricultural area which is now to be turned into the industrial area. The agricultural fields present near the project include sugar cane and cotton. The trees species present near the project site include orange, sheesham, mulberry etc. No cutting of trees is involved in the project, as there is no tree present on the proposed site.

2.8 COST AND MAGNITUDE OF OPERATION:

Total Cost of project is approximately 50 Million PKR including land cost 5 Million, infrastructure cost 15 Million PKR approx and machinery cost 30 Million PKR approx.

The total area of Project site is 97.50 Kanals. Project building will have following facilities:

- Storage Area
- Office
- Open land

2.9 SCHEDULE OF IMPLEMENTATION:

The time required for the construction of proposed project M/S Lion Waste Management Private Limited is approximately 01 year. The work will be started as soon as the environmental approval is granted from EPA. Breakdown of the time for the construction phase is given below in Table 2.1:

Table 2.1: Timeline for Construction of Project

Sr. #	Activities	3 Months		3 Months			4 Months			2Months		
		4W	4W	4W	3W	5W	4W	4W	4W	4W	3W	1W
1	Designing	■	■									
2	Mobilization of Contractors			■								
3	Lean Construction Period				■							
4	Peak Construction Period					■	■	■	■	■	■	
5	Restoration of Site											■

2.10 DESCRIPTION OF THE PROJECT

The proposed project is management of Municipal Solid Waste (Non-Hazardous Waste) including its disposal, storage and transportation.

2.10.1 TECHNOLOGY AND MECHANIRY USED ON SITE.

Sr. No.	Specifications of Proposed site	
1	Type of Waste	Municipal Solid Waste
2	Capacity	213 tons/day
3	No of storage cells	16

2.10.2 MANAGEMENT OF NON-HAZARDOUS WASTE

The main features of the non-hazardous waste management program are:

- Collection and Transportation of Municipal Solid Waste (non-hazardous waste)
- Waste Storage

For an effective management of non-hazardous waste, it is essential to have the necessary tools for assessing the status of readiness at all levels. The absence of waste management, lack of awareness about the health hazards, insufficient financial and human resources and poor control of waste disposal are the most common problems connected with non-hazardous waste. An essential issue is the clear attribution of responsibility of appropriate handling and disposal of waste. According to the polluter pays principle this responsibility lies with the waste producer, usually being the industry or health care provider or the establishment involved in related activities.

COLLECTION AND TRANSPORTATION OF WASTE

For the current proposed project, waste will be collected from domestic/residential areas etc. At the beginning, four vehicles will be used for the transportation of waste. The waste will be collected during night time. The proposed project is located near Gulshan Colony Road, Chak No. 20/3-R, Tehsil Haroonabad, District Bahawalnagar. There will be no general traffic disturbance as the project is in the outskirts of the city. The workers will be provided with Personal Protective Equipment for loading and unloading of the waste. Workers safety will be given priority in every stage of the

process

NON-HAZARDOUS WASTE STORAGE

The collected waste has to be properly stored before final disposal by dumping. Segregation of the waste must be done at this stage as well. The following points may help in proper storage of the waste:

- Location of the storage site should be away from residential areas
- Location of the site should be away from food storage or food preparation facilities
- Providing convenient approach for the waste carrying wheel barrows/ trolleys
- Secure from unauthorized access at all times
- Make easily accessible to authorized staff
- Cover and secure properly to keep animals and birds etc. away from the site
- Ensure daily evacuation

For the current project, all of the above points were taken into consideration. The storage area should have an impermeable, hard-standing floor with good drainage; it should be easy to clean and disinfect.

1. 2.3-ton Air Conditioner will be provided for the controlled temperature in the storage area.
2. Retention time will be about 1-2 hours.
3. Location of the site away from food storage or food preparation facilities
4. Provision of convenient approach for the waste carrying wheelbarrows/trolleys.
5. There should be a water supply for cleaning purposes.
6. The storage area should afford easy access for staff in charge of handling the waste.
7. It should be possible to lock the store to prevent access by unauthorized persons.
8. Easy access for waste-collection vehicles is essential.
9. There should be protection from the sun.
10. There should be good lighting and at least passive ventilation.
11. A supply of cleaning equipment, protective clothing, and waste bags or containers should be located conveniently close to the storage area.

2.10.3 DESIGN AND CONSTRUCTION OF DUMP SITE

The objective of the project is to construct 16 storage cells to promote cleaner practices and complete combustion of non-hazardous wastes with a view to waste volume reduction and amelioration..

2.10.4 SCOPE OF WORK

The 16 storage cells will have the operating capacity upto 203 ton/day. In addition, an optional Water spraying system can be added to reduce the dust emission in high and effective rate.

SALIENT FEATURES

2.11 UTILITIES

2.11.1 WATER REQUIREMENT AND WASTEWATER MANAGEMENT

SOURCE OF WATER

In proposed project the water requirement in the construction and operation phase will be fulfilled by extraction of groundwater through installation of pumps.

WATER REQUIREMENT AND WASTEWATER GENERATION

Water consumption will be only for plant cooling evaporative losses and for domestic use. Domestic wastewater will be handled through Septic Tank and will be discharged off properly. The Breakup of water requirement and wastewater generation during. Construction phase of project are given in Table 2.2:

Table 2.2: Water Requirement and Wastewater Generation during construction

Sr. No.	Description	Water Consumption (m ³ /day)	Wastewater Generation (m ³ /day)	Mode of Disposal
1	Domestic	2.2	1.76	Will be collected through proper network of pipeline into a septic tank and then will disposed off in Main Drain.
2	Construction and sprinkling	1000	-	-

Breakup of water requirement and wastewater generation during operational phase of project are given in Table 2.3:

Table 2.3: Water Requirement and Wastewater Generation during Operation

Sr. No.	Description	Water Consumption (m ³ /day)	Wastewater Generation (m ³ /day)	Mode of Disposal
1	Domestic	2	1.92	Domestic wastewater, after proper collection into Septic Tank will be discharged into sewage line.

2.11.2 SOLID WASTE GENERATION AND MANAGEMENT

- CONSTRUCTION PHASE**

The domestic solid waste during construction phase at the project site will be handled

properly by its proper collection, reusing of reusable material and then its final disposal. The excavated material from the proposed project site will be used for backfilling of the areas and other construction purposes. For proper waste management, waste bins will be placed in the unit. From these bins the waste will be collected for the proper disposal.

- **OPERATION PHASE**

During operation phase, there will be major sources of solid waste. First is domestic solid waste. The generated domestic waste will also be managed properly by its proper collection and disposal.

2.11.2 ELECTRICITY

Source of power will be a WAPDA. The energy demands for the project will be for the administrative block and operation of the site. A generator will be installed for the operation of the facility in case of power failure.

2.11.3 FUELS

Diesel will be used as a fuel in proposed project.

2.12 HEALTH, SAFETY & HYGIENE

FIRST AID FACILITY

At workplace workers and employers will have enough information, knowledge and training regarding first aid treatment in case of any emergency. The project will provide proper healthcare facilities to workers and staff to cope with any incidental accidents and tackle them.

SAFETY TRAININGS

Workers and all the staff will get proper training about the work and safety practices.

USE OF DRUGS AND NARCOTICS

Drugs and narcotics will be strictly prohibited during working hours in working area.

SECURITY

Safety signs & boards will be placed at the project site during construction phase. At the time of working proper SOPs will be followed like pre-announcement.

PERSONAL PROTECTIVE EQUIPMENT (PPES)

Workers will be provided with PPEs such as Harnesses, Masks, Gloves, Helmets, Safety shoes, Ear plugs, Ear muffs & other personal protective equipment during the working hours to ensure personnel health & safety. Implementation of PPEs will be ensured by the proponent for the project.

RISK ASSESSMENT AND DISASTER MANAGEMENT PLAN

Risk Assessment study for the project was carried out. According to the studies and local people of the area the subject area is not natural disaster prone. After all these predictions, said project is also in favor.

OCCUPATIONAL EXPOSURE MITIGATION PLANNING

To control any occupational health and safety impact a detailed planning for mitigation measures will be done. All employees will be trained for Environmental Health and Safety (EHS) policies and practices. The management will follow the environmental management plan to implement the mitigation measures further. Institutional measures such as occupational health & safety planning and environmental compliance monitoring for environmental parameters will be strictly followed.

2.13 RESTORATION AND REHABILITATION PLAN

Land rehabilitation is the process of returning the land in a given area to some degree of its former state, after some process (industry, natural disasters, etc.) has resulted in its damage.

- For the proposed project development, there will be no need for relocation or rehabilitation because the area is currently an open land and is owned by the proponent.
- After completion of the construction work all the disturbed sites will be changed into conditions as they were prior to the commencement of the project or even far better than that.

- As far as the rehabilitation is concerned, the proponent will do proper landscaping once the construction of the project is completed.
- The area will be planted with indigenous vegetation.
- All the concrete will be broken and disposed of according to the rehabilitation plan.
- For improving the environmental and aesthetic value or visual quality of the site, the proponent will carry out landscaping and tree planting within premises of factory for which the Tree Plantation Plan has been provided in Chapter 6 of this report.

2.14 GOVERNMENT APPROVALS

M/s Dump Site Zakwan Builders & Developers (Pvt.) Ltd.. is about to start its new unit. So, this project needs only Environmental Approval after that this project will start construction.

CHAPTER III

CONSIDERATION OF ALTERNATIVES

This section covers the project alternatives which were examined for the proposed project near Gulshan Colony Road, Chak No. 20/3-R, Tehsil Haroonabad, District Bahawalnagar. Before carrying out any project, it is imperative to evaluate different alternatives to arrive at the best possible option. An analysis of the available alternatives is necessary to establish the most suitable management and technology options will be adopted for the project, while minimizing environmental impacts. This evaluation explains the selection of appropriate option that was required to ensure optimal results within defined set of economic, environmental, health and safety constraints. In particular, it outlines the following project options:

- No Project option
- Alternative Site Option
- Alternative Technology

3.1 ALTERNATIVE I – NO DEVELOPMENT OPTION:

No project option means that there would be no project at all. The no project option, if taken, would stop the community from an important and necessary project which is the need for today as per alarming situation of waste generated from industries and hospitals.

Accelerated growth of population and a gradual increase of per capita solid waste have been observed in the city of Bahawalpur. Lack of awareness prevails among stakeholders regarding reduction at source and segregation of waste and available other options. The existing Bahawalpur solid waste management system is administered by the Municipal Administration of Tehsil (TMA). In addition, the current collection of solid waste is divided into primary and secondary collection systems. There is no proper system of solid waste disposal in the city, even so there is no sanitary land fill site.

If the situation exists for the next few years, the Bahawalpur city will give a picture of heaps of solid waste at public places.

Other impacts of the no project option would be loss in employment and social welfare in the project area, as the project is bound to create jobs and improve the existing condition of the community of the area through different community development and social welfare projects.

From the environmental point of view, this option would result in a loss of opportunity in further improvement of the environmental management of the area, environmental baseline data and the mitigation and compensatory programs.

3.2 ALTERNATIVE II- SITE ALTERNATIVE:

In reference to the project site alternatives, several lands were evaluated. The final selection of site is based on following criterion:

ACCESSIBILITY:

The site should be accessible from a permanent road to allow ready transport.

WATER SUPPLY:

Availability of adequate water supply, which should also meet drinking water standards.

SOIL CONDITIONS FOR CIVIL STRUCTURE:

Availability of sufficient land to design and layout plan in an appropriate manner, with consideration of future expansions.

ELECTRICITY:

Availability of electricity from the WAPDA for an uninterrupted supply of power, required for the project.

In view of the above criteria, it was concluded to establish the DUMPING facility on the current site. The geographic position of the proposed project is very ideal which connects it to the neighboring infrastructure through haroonabad road. The proposed project is also away from the human settlement. The nearby residential area named as chak 49/3R is located 1km away, Basti Khokhran is located at an aerial distance of 1.96km away from the proposed project site. Moreover, the nearby industry, Bhahtti

rice mills is located at an aerial distance of 1.3km.

Any other site does not possess such a broad spectrum of commercial, industrial and management benefits.

As no important religious, archaeological, historical or recreational site, or any other ecologically sensitive, declared protected area or poor population exists within close vicinity of the selected site. In view of these facts, it can be concluded that the selected project site is very suitable which is outside the city. The project site does not require cutting of trees and the land is already owned by the proponent.

3.2.1 ZONING OR IDENTIFICATION OF LAND OF PRIME IMPORTANCE:

Site selected for the subject project is owned by the proponent. The current site was used for agriculture purposes but now the surrounding land is being converted to be used as agricultural. The land selected for the subject project is not of prime agricultural importance. The establishment of the dumping site here will be out of the city premises and will not cause any disturbance to general public.

3.2.2 SITES OF SPECIAL CULTURAL OR HISTORICAL INTEREST:

There is not any area of historic or cultural importance near the project site, so the impact of the project on destruction of resources of historic and cultural importance is not applicable.

3.2.3 AREAS OF LAND WITH CONSTRAINTS UPON DEVELOPMENT – LAND LIABLE TO FLOODING ETC.

Land is suitable for the development and land is not prone to flooding because history show the area is free from flooding.

3.3 TECHNOLOGY ALTERNATIVE

Dumping of wastes has been widely practiced but alternatives are becoming available Incineration is also the method of choice lot most hazardous healthcare wastes and is widely all over the world. Alternatives to incineration are available in many developed countries. As these techniques are either too complicated or very expensive, they are not being used in Pakistan.

Keeping in view all the environmental consideration, best suited technology has been proposed for the said project including no air emissions. Water mitigation techniques are also considered at their best.

CHAPTER IV**DESCRIPTION OF THE ENVIRONMENT**

4.1 GENERAL

An environmental baseline study is intended to establish a database against which potential project impacts can be predicted and managed later. The EIA of the proposed project covers a comprehensive description of the project area, including the resources which are expected to be affected by the project, as well as, those which are not expected to be directly affected by the construction and operation of the project. The existing environmental conditions around the proposed project have been considered with respect to physical, biological and socio-economic aspects. Site visits were conducted to survey the field area and to collect environmental data on physical, biological and socio-economic parameters. Consultations were held with the general public and stakeholders of the project area in order to seek the public opinion on the implementation of the proposed project.

STUDY PARAMETERS

The existing information to establish a database for the EIA of the project was collected from different government departments; review of previous studies and through the site visits carried out in the project area.

The Social Assessment of the project area was conducted through consultation with the community by interviewing them. Assessment of the area has been carried out distinguishing it into:

STUDY AREA

An area about half a kilometer radius around the project has been considered as influence zone and it has been taken as Study Area (SA) to collect the primary data related to physical, ecological and socio-economic environment.

PROJECT AREA

The boundary of that specific area where the project has been established is taken as Project Area.

4.2 PHYSICAL ENVIRONMENT

The study examines the physical resources, topography, soil, climate, surface and ground water and geology not only of the project site but also the city as whole to assess whether the project under review can or does impact on any of these parameters. The description of physical environment of Lahore city and the project site is present in the following sub sections.

4.2.1 TOPOGRAPHY

District Bahawalnagar lies between 20-51 to 30-22 north latitudes, and 72-17 to 73-58 east longitude. It is bounded on north by districts of Okara, Pakpattan and Vehari on the East by Ferozpur and Ganganagar district of India, on the south by Indian estate of Bikanir and on the west by Bahawalpur district. River Sutlej forms the northwestern boundary of the district. It is about 163 meters (535 feet) above sea level.

Reference: PUNJAB MUNICIPAL SERVICES IMPROVEMENT PROJECT ()
PLANNING REPORT BAHAWALNAGAR 2008

4.2.2 HYDROLOGY

Bahawalnagar town is a plain with a minor slope. The sub soil water of the town is brackish and unfit for human consumption. Water table is 4 feet below the ground level and steadily rising. Underground water near Fordwah canal is fit for drinking purpose. A sub soil investigation was carried out along Fordwah Canal from the Wapda Hydrology Department which has recommended installing shallow tube wells of 0.5 cusec capacity at 500 feet apart along Fordwah Canal

4.2.3 CLIMATE

The Bahawalnagar district is spread over 8878 sq. km area with hot and dry climate and the minimum and maximum temperature recorded are 11C and 50C. The Project Area has extreme climate: it has hot summer and cold winters. June is the warmest

month of the year. The temperature in June averages 35.6 °C. In January, the average temperature is 13.4 °C. It is the lowest average temperature of the whole year. The driest month is November, with 1 mm of rain. Most precipitation falls in July, with an average of 49 mm.

a. Temperature and Precipitation

Average, minimum, maximum temperatures and precipitation for study area is given in following Table 4.1¹

Table 4.1: Temperature and Precipitation

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Avg. Temp. (°C)	13.4	16.4	21.8	27.9	33.1	39.6	34.3	32.9	31.1	26.6	20.4	15.2
Min. Temp. (°C)	5.4	8.5	13.7	19.5	24.8	28.8	28.8	27.7	24.5	18.1	11.4	6.8
Max. Temp. (°C)	21.4	24.4	30	36.3	41.4	42.5	39.8	38.2	37.4	35.2	29.4	23.6

¹ Available on: <https://en.climatedata.org/asia/pakistan/punjab/-3010/>

Precipitation (mm)	6	7	10	6	6	6	49	36	10	2	1	4
---------------------------	---	---	----	---	---	---	----	----	----	---	---	---

The trends of average minimum and maximum temperature are shown below (Figure 4.3²).

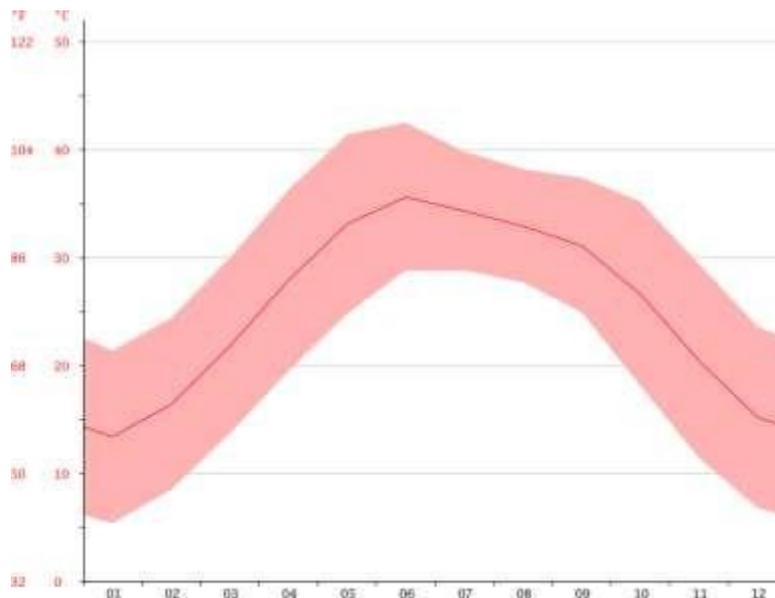


Figure 4.3: Maximum and Minimum Temperature

The trend of average monthly precipitation is shown below (Figure 4.4)³

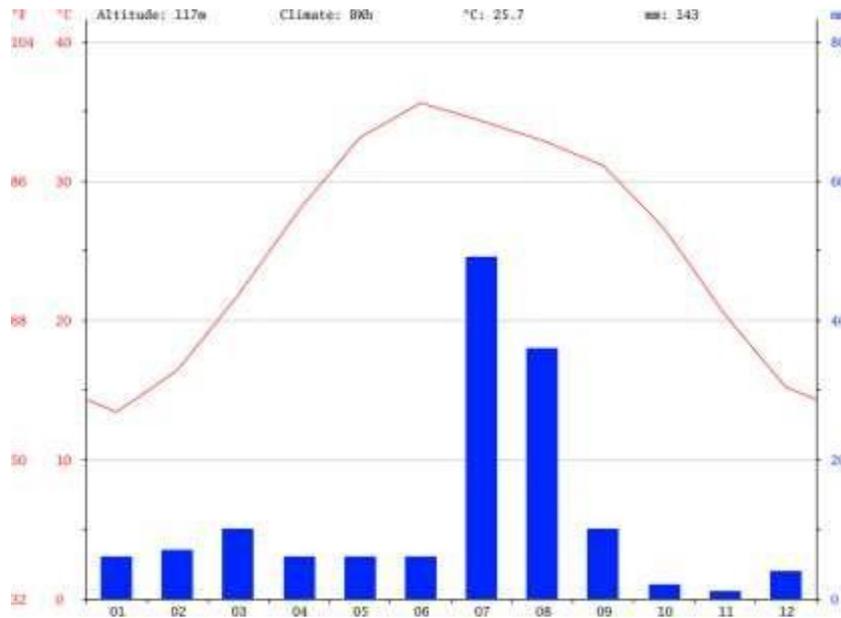


Figure 4.4: Average Monthly Precipitation (mm)

<https://en.climate-data.org/asia/pakistan/punjab/>
<https://en.climate-data.org/asia/pakistan/punjab/>

b. Wind Speed

Wind speed in study area varies throughout the year. The Figure for Bahawalpur shows how many days within one month can be expected to reach certain wind speeds. Monsoons create steady strong winds on the Tibetan Plateau from December to April, but calm winds from June to October. The graphical representation of maximum, average and minimum wind speed for each month is shown below (Figure 4.5⁴).

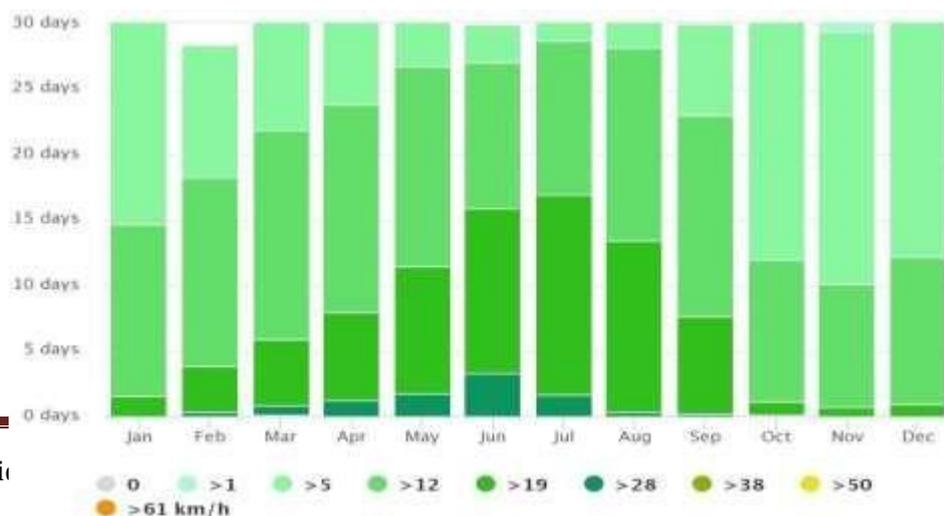
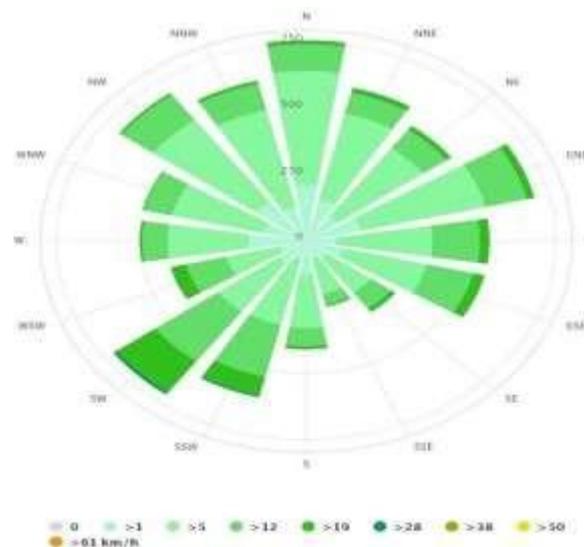


Figure 4.5: Wind Speed
c. Wind Direction

Wind direction of any area shows that from which direction the wind is blowing. For this purpose wind rose diagram is formulated which shows that for how many hours the direction of wind blow from specific direction i.e. from SW to NE etc. the prominent wind direction of district is NS. Wind rose of study area is shown below (Figure 4.6⁵).

 4

https://www.meteoblue.com/en/weather/historyclimate/climatemodelled/bahawalnagr_pakistan_118
https://www.meteoblue.com/en/weather/historyclimate/climatemodelled/bahawalnagr_pakistan_118

Figure 4.6: Wind Rose Diagram
d. Sunshine

Sunshine of any area shows that how many days are sunny in a month. The sunshine patterns for a specific area vary accordingly. For each month, the number of sunny and cloudy days for study area is shown below (Figure 4.7⁶):

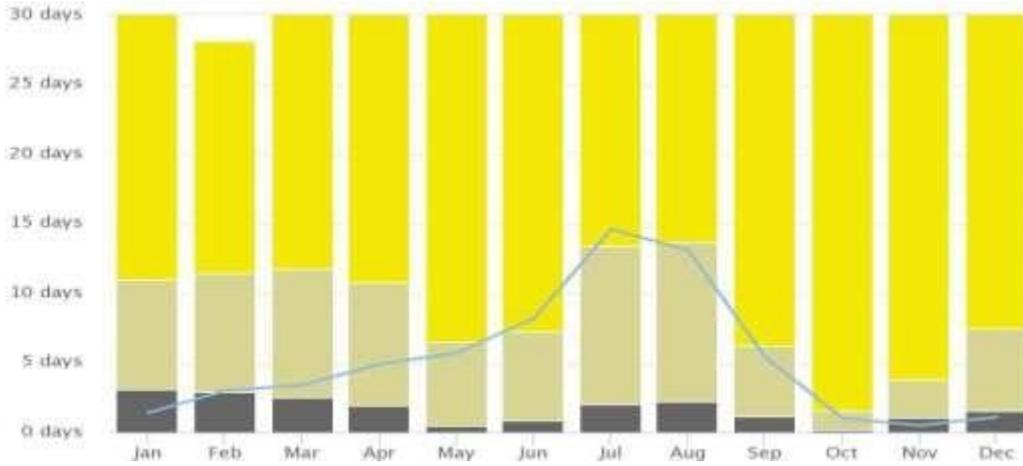


Figure 4.7: Sunshine Patterns

The Figure shows the monthly number of sunny, partly cloudy, overcast and precipitation days. Days with less than 20% cloud cover are considered as sunny, with 20-80% cloud cover as partly cloudy and with more than 80% as overcast.

6

https://www.meteoblue.com/en/weather/historyclimate/climatemodelled/bahawalnagrr_pakistan_118

AMBIENT AIR QUALITY

Atmospheric pollution particularly in urban area has a strong impact upon daily life. Lahore is the second largest city of Pakistan. Its economic growth and rising energy consumption are causing the increase in air pollution. The main sources of the air pollution are motor vehicles and industrial activities. SO₂, NO₂, CO₂, CO, O₃ and Particulate Matter (PM) are investigated as the pollution indicators.

DRINKING WATER QUALITY

WASA (Water and Sanitation Agency) is providing drinking water to the residents of Bahawalpur. WASA claims the quality of water conform to the Drinking Water Standards.

The increase in population will have direct impact on the water sector for meeting the domestic, industrial and agricultural needs. Pakistan has now essentially exhausted its available water resources and is on the verge of becoming a water deficit country. The quality of water supplies in many cities of Pakistan is deteriorating fast. Over pumping of groundwater due to extended drought has affected the water quality adversely.

Ground water quality testing was carried out to determine its suitability for use. Testing data shows that ground water is suitable for drinking. The results of ground water analysis shows, almost all the parameters are within safe limits of PEQS.

4.2.4 NOISE LEVEL

Noise level was also measured on project site, the noise level recorded at project site was within PEQS.

4.2.5 SEISMOLOGY

Study area is located in the tectonic zone of down wrap and platform slop in the seismic zone of noticeable earthquake from 3.1 to 4.9 on Richter scale (Atlas for Pakistan). According to building code of Pakistan prepared by NESPAK recently, it is

located in Seismic Zone 2A of Pakistan (Lower limit of moderate damage). Zone 2A represents peak ground acceleration (PGA) from 0.08 to 0.16g. **Figure 4.9** shows the seismic zoning map of Punjab with the Project Area falling under Seismic Zone-2A.

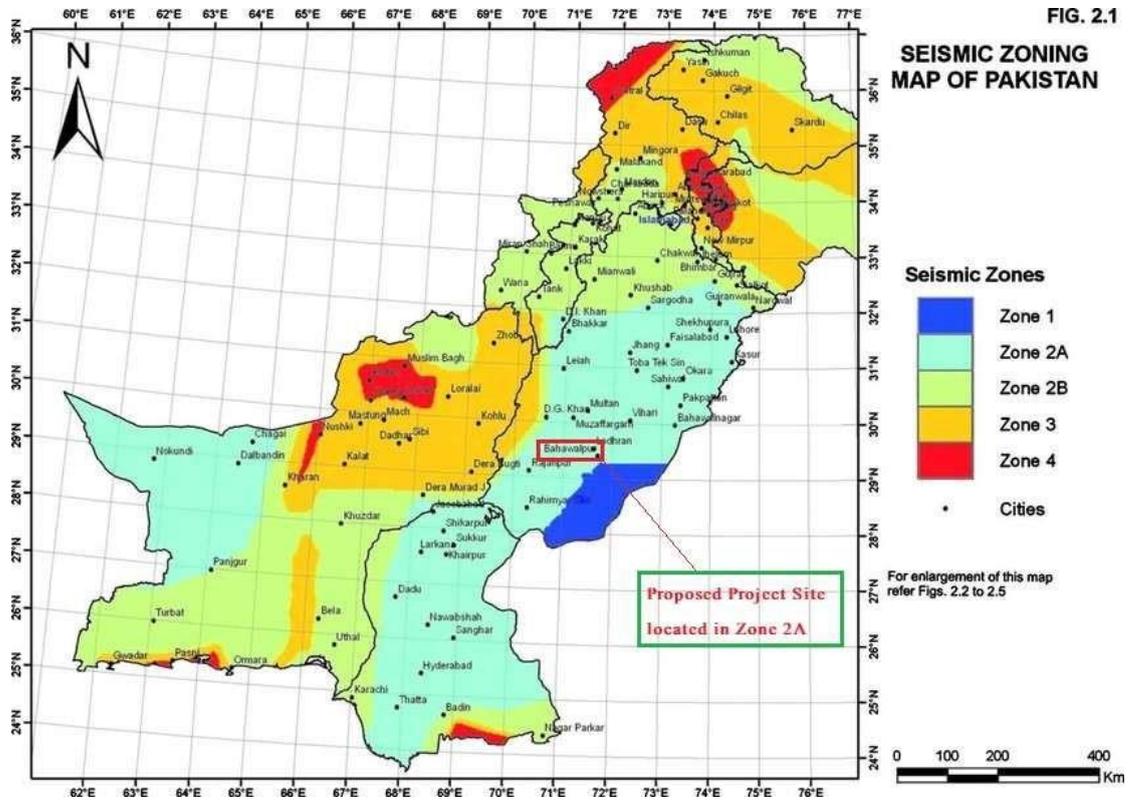


Figure 4.9: Seismic Zoning Map of Punjab

4.3 ECOLOGICAL ENVIRONMENT

The ecological environment of an area is generally considered sensitive to large-scale developments. Disturbances and imbalances in the ecological environment can adversely affect biodiversity features of an area. The biodiversity of an area generally reflects the abundance and richness of the biological and the ecological resources.

4.3.1 FLORA

No significant flora is present in the study area. Some shrubs and grasses were found in study area grown on the bank of roads and open spaces. Although common trees have been grown in the study area including Kikar, Mulbury, Phulahi and Eucalyptus, etc. The detail of the trees is given below in Table 4.3. No forest was found in the study area.

Table 4.3: Common Trees & Plants of Study Area

Sr. #	Scientific Name	Local Name
1	Acacia Karoo	Kikar
2	Morus	Mulbury
3	Acacia modesta	Phulahi
4	Eucalyptus globulus	Eucalyptus

a. GRASSES

The names of common grasses that are found in study area are given in [Table 4.4](#)

Table 4.4: Common Grasses of Study Area

Sr.#	Scientific Name	Common Name
1	Lasiurus scindicus	Sewen
2	Cenchrus ciliaris	Dhaman
3	Panicum antidotale	Morrot
4	Pennisetum perpurum	Sarkanda

b. SHRUBS AND HERBS

The shrubs and herbs provide nutritious supplemental feed to livestock during lean period because they are perennial and have depth root systems. Some of the common shrubs and herbs present in study and project area are Karer, Jand, Aak, Kana and Lana; Botanical names of which are shown below in [Table 4.5](#):

Table 4.5: Major Shrubs and Herbs of Study Area

Sr. No.	Local Name	Botanical Name
1	Karer	Capparis Decidua
2	Jand	Prosopis Cineraria
3	Aak	Calotropis Procera
4	Kana	Sueda Fruiticosa
5	Lana	Saccharum Munja

c. ENDANGERED FLORAL SPECIES

No such plant species is encountered at study area that is endangered or declared protected under national, provincial or local government definitions as well as international agreements/protocols ratified by Government of Pakistan.

4.3.2 FAUNA

The study on terrestrial fauna in the study area is based upon the field investigation and reports of Forest Department. A variety of animals found in study area which are categorized as Mammals, Birds, Reptiles and Amphibians.

a. MAMMALS

Some of the common Mammals found in study area are Urial, Dog and Monkey. Following table gives the Common and Zoological names of Mammals:

b. BIRDS

Native species of birds present in study area are pigeon, sparrow, crow, golden orioles, wood peckers and black partridges. Common and Zoological names of birds are given in Table 4.6:

Table 4.6: Major Birds present in Study Area

Sr. No.	Common Name	Zoological Name
1	Pigeon	Columbidae
2	Sparrow	Passeridae
3	Crow	Corvus
4	Golden orioles	Oriolus oriolus
5	Woodpeckers	Picidae
6	Black partridges	Melanoperdix niger

c. REPTILES AND AMPHIBIANS

The native species of reptiles and amphibians observed in Study Area are Snake, Lizard and Frog.

Table 4.7: Reptiles and Amphibians of Study Area

Sr. No.	Common Name	Zoological Name
1	Snake	Serpentes
2	Lizard	Lacertilia
3	Frog	Anura

a. ENDANGERED FAUNAL SPECIES

The endangered species present in study area is Urial which has been declared protected under national, provincial or local government definitions as well as international agreements/protocols ratified by Government of Pakistan.

WILDLIFE SANCTUARIES AND GAME RESERVES

No wildlife sanctuary or Game Reserve is located in the vicinity of the study area.

CRITICAL HABITATS

No wild life sanctuary or game reserve (Critical Habitats), exists near the project area or the study area and therefore it can be stated that this project does not affect any critical habitat as, no critical habitat is located close to the project area.

4.4 SOCIO ECONOMIC ASSESSMENT

Social change is the consequence of almost any intrusion into the community life of any society. The intrusion can be in the form of any developmental projects or nonspecific, less tangible forms such as increased exposure to other cultures, technological changes and so on. The social change that results from intrusion into community life can also be beneficial, but can have undesirable or negative outcomes. Even that change in the long run may have positive effect on the social well being of a community.

Social Impact Assessment is a methodology used for examining social change due to external sources, especially specific developmental projects, but also government policies, technological changes and social processes or anything that has a social impact.

The objectives of the given study are outlined as follow:

- To carry out the assessment of social impact.
- Acquire socioeconomic data to evaluate and identify the project interventions.
- Assess needs of community related environmental concerns.
- To assess adverse and beneficial socioeconomic and health impacts of the activity.
- To suggest remedial measures and solutions to improve socio economic


conditions.

- To analyze socio economic conditions of community, with special reference to environment and conservation of natural resources.

4.4.1 HEALTH FACILITIES

The health facilities including various healthcare centers, hospitals, dispensaries, basic health units, dental clinics and city healthcare centers are present in the study area, aim to provide the citizens best healthcare facilities and prevention from contagious and other harmful diseases.

There is no health facility or any dispensary near the project area.

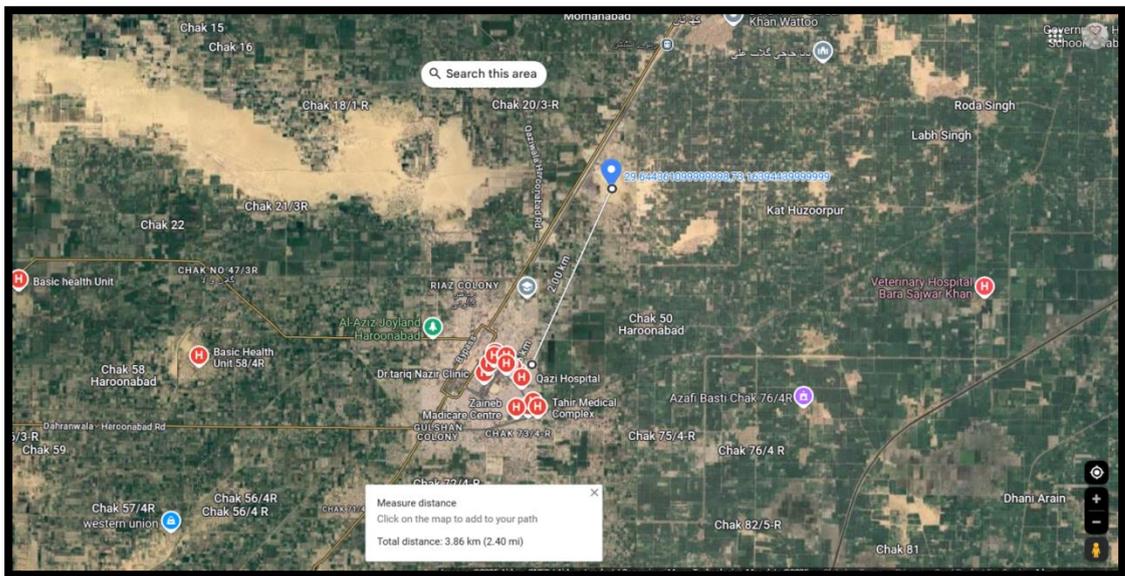


4.4.2 EDUCATIONAL FACILITIES

There are number of government and private schools, colleges and universities are being functional in the study area which is imparting education to the locals.

There are no any main private or government school seen in the nearby vicinity of the proposed site however there are some private educational institutes which include

schools, madrassa and academies are present at approximately 4-5km away from the site.

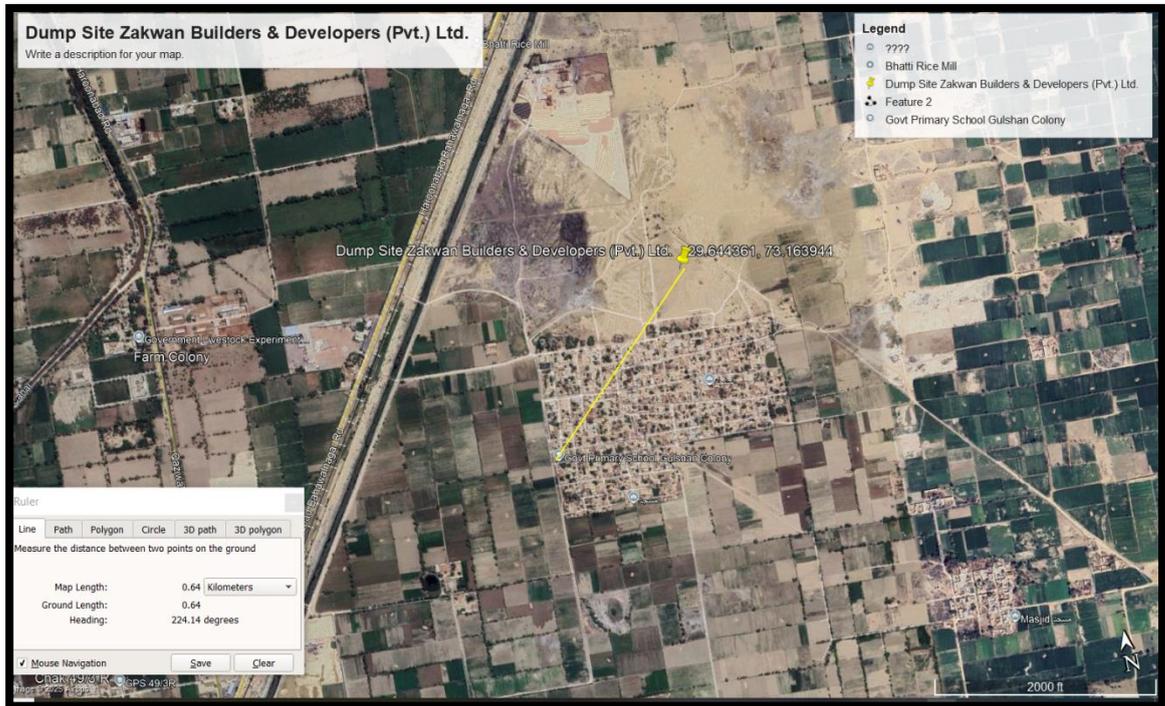

4.4.3 TRANSPORTATION AND COMMUNICATION

Public transport is not available in the project area. The public transport terminals there are plenty of rickshaws are available which run on compressed natural gas to reduce pollution in the city and of course the few residents and site owners have their own conveyances.

RAILWAYS

The national intercity railway line is passing through the city.

4.4.4 INDUSTRIAL ACTIVITIES

Industries are the most important industries playing fundamental role in the economy of the area. The proposed project will be constructed on agricultural area. The nearby industry, Bhatti rice mills is located at an aerial distance of 1.3km.

4.4.7 WATER SUPPLY

The proposed project will use groundwater. The water will be used only for the

domestic purposes during construction phase. While during operational phase, water will be used for domestic as well as for cooling purpose.

4.4.8 ELECTRIC SUPPLY

MEPCO power supply will be available at the proposed site. Application for electricity connection is submitted to the concerned department. Apart from that, they are planning for a backup system to overcome the load shedding and sudden electricity breakdown. The proposed back up plan will be comprised of generator.

4.4.9 TELEPHONE FACILITIES

Landline and Cellular telephone facilities are present in the area and proposed site will purchase their own landline service for the office and factory.

4.4.10 INFRASTRUCTURE

The road infrastructure is generally good for existing requirements; this includes the roads condition and road lanes, chowks. Project area can be accessed through Haroonabac road . Most of the families live there in houses made up of cement and bricks.

4.5 QUALITY OF LIFE VALUES

The proposed project site is surrounded by other industrial units as well as open plots. There is no any planned residential area near the project site therefore, individuals and workers from neighboring areas were interviewed. The individuals assessed from the neighboring communities of the project area were involved in agricultural practices and private jobs in nearby industries. Most of the people work in the shops or small units.

Neighboring community inhabitants involved in different occupations were asked about their monthly income but most of them hesitated to tell and stated that they earn just enough to fulfill their basic demands. Regarding the project, almost all of the interviewed members are in favor of the project as it will not involve any operational activities which will generate pollution rather this project intends to abate pollution by process.

Data was also collected to assess the health status of the community members at the project site. Complaints about different diseases were also recorded during the study. The diseases prevalent in the community were stomach disorders, fatigue, joint pain, diabetes and arthritis. But it is observed that all these diseases are commonly due to improper diet and water contamination.

RELIGION

Most residents are Muslims, while other minorities like Hindu etc. are very small in number.

ETHNIC STRUCTURE

The principal inhabitants of the region surrounding Bahawalpur are Jat and Baloch peoples.

MOTHER TONGUE

The mother tongue refers to the language used for communication between parents and their children in any household. The local language is Saraiki, while Urdu and English is the official language used by various institutions of education and administration.

CHAPTER FIVE

INVOLVEMENT OF STAKEHOLDER/ PUBLIC CONSULTATION

5.1 SOCIAL IMPACT ASSESSMENT

Social Impact Assessment is a methodology used for examining social change due to external sources, especially specific developmental projects, but also government policies, technological changes and social processes or anything that has a social impact. We define social impact assessment in terms of efforts to assess or estimate, in advance the social consequences that are likely to follow from specific proposed project. The social change that results from intrusion into community life can also be beneficial but can have undesirable or negative outcomes. Even that change in the long run may have positive effect on the social well-being of a community.

5.2 OBJECTIVES

The foremost objectives of social impact assessment are:

- Acquire socioeconomic data to evaluate and identify the project intervention
- Evaluate needs of community related environmental concerns
- To evaluate adverse and beneficial socioeconomic and health impacts of the activity
- To give suggestion and find solutions to improve socio economic conditions
- To analyze socio economic conditions of community, with special reference to environment and preservation of natural resources

5.3 STAKEHOLDERS CONSULTATION

It is a mean of involving the both primary and secondary stakeholders in the project decision making process in order to address their concern, improve project design and give the project legitimacy. The stakeholders' consultation has been conducted in a participatory and objective manner to enhance the project stability.

Public discussions were held with the inhabitant of the surrounding area. They are quite positive to the project and see the project as growing business. The people

observe strong positive impacts regarding employment, business and structural development due to this project. EIA findings depict that people perceive overall positive social and economic impacts by the project. Their attitude towards the project operation is highly optimistic. Majority of the people are convinced for development in the area and they correlate this progress with the pace of their social mobility but they were also concerned with scenic beauty of the area and employment which the proponent has ensured to maintain the aesthetics of the area, reclaim the land and also to provide jobs/employment during construction and at the time of functioning of the project. Moreover, project proponent admitted to adopt all the mitigation measures to control any impacts resulting from the subject project.

5.4 IDENTIFICATION OF STAKEHOLDERS:

The identification of stakeholder is important for the sustainability of a development project. Stakeholder will be identified as the people who may directly or indirectly affected by the project activities. This will be helpful in predication and assessment of project impacts at an early stage; and accordingly, appropriate mitigation measures can be suggested. The stakeholders that are likely to be influenced by the project activities or would like to participate in the project will include the following

- Communities in the project or surrounding area;
- Government Departments;
- Non-Governmental Organizations (NGO) and community Based Organizations

PROPONENT

Possible impacts and mitigation measures related to the subject dump site project were discussed with the project proponent and management. They assured to take all suggested mitigation measures to control any deviation arose by the project and to make the project Environmental friendly.

RESPONSIBLE AUTHORITY

Management of M/S Dump Site Zakwan Builders & Developers (Pvt.) Ltd. is the responsible authority to take all mitigation measures prior to the construction and operational activities.

OTHER DEPARTMENTS AND AGENCIES

For the impact analysis detailed with the management, local community, educational institutes, health institutes, hospitals and NGOs. All issues were discussed related to implementation of the project. Scoping sessions, focused group discussion and way side consultations were held with the relevant stakeholders in the area.

ENVIRONMENTAL PRACTITIONERS AND EXPERTS

Team of EHS Consulting Services (EHS) visited the project site, had discussion with stakeholders and consulted with the local people of nearby and other villages to evaluate the project socioeconomic impacts. People of the area belong to different professions like mostly belong to employment, own businesses, doctors, some of them communicated but according to social value of the area they mostly hesitate to communicate comfortably and get pictured. People provide the massive information about the project and have positive remarks regarding the project development.

TARGET POPULATION

The target population was comprised of the Site workers and the people living nearby the site area.

5.5 METHODS OF PUBLIC CONSULTATION

Public Consultation was carried out for two days. The following methods were used for public consultation with project stakeholders in order to ascertain their concerns regarding project implementation.

- Focused Group Discussion (FGD)
- Scoping Sessions
- Formal Group Meetings
- Informal Group Meetings

5.5.1 STUDY AREA

The proposed plant site and its surrounding areas were visited for socio-economic aspects. The people of following surrounding village of the proposed plant site were consulted:

- Jageer Abbaspur

Data was analyzed for the selected parameters for the socioeconomic assessment of community members. Microsoft excel (2019) was used to graphically represent the main finding of the social survey.

5.5.2 STUDY SIZE

About twenty-three (30) individuals from general community with different socio-economic conditions were surveyed. These were ranged in age from 20 years to more than 50 years. The information of these respondents is summarized in table 5.1 below.

Table 5.1: Details of Consulted Stakeholders

Sr. No	Name	CNIC / Contact number	Suggestions
1	Nadir Maqbool	31201-03179550-7	Create Job opportunities for local people
2	Zohaib Shah	31201-4687905-2	No Complain.
3	Waris Khan	31201-6185808-1	No Complain
4	Saad Iqbal	31201-6269454-9	No Complain
5	Muhammad Haroon	0301-7725562	Project will prove helpful for people.
6	Waqas Butt	31201-5068090-5	No Complain
7	Muhammad Alaziz	31021-4949541-5	Create Job opportunities for local people
8	Muhammad Shabir	0300-43277140	Project will

			prove helpful for people
9	Abdul Rasheed	310201-9028964-5	Project will prove helpful for people
10	Muhammad Hamdi	31021-0293664-1	No Complain
11	Yar Muhammad	31201-3317484-3	Create Job opportunities for local people
12	Rana Bilal	31201-5627273-7	Create Job opportunities for local people
13	Muhammad Tariq	31201-8152045-3	Project will prove helpful for people
14	Ghulam Mustafa	31201-6764342-7	Project will prove helpful for people. They need to create Job opportunities for local people
15	Muhammad Niaz	31201-6529643-1	Project will prove helpful for people. They need to create Job opportunities for local people
16	Pir Baksh	31201-1653103-9	No Complain
17	Chand Wada	31201-1953977-7	No Complain
18	Muhammad Tahir	0303-8415753	Create Job opportunities for local people
19	Muhammad Sadir	31021-6943940-5	Project will prove helpful for people.

20	Khuda Baksh	31201-0300036-3	No Complain
21	Saeed Ahmad	31201-0300024-7	Project will prove helpful for people. They need to create Job opportunities for local people
22	Allah Ditta	31201-0299325-9	Project will prove helpful for people. They need to create Job opportunities for local people
23	Bilal Ahmad	31201-0299322-9	Project will prove helpful for people.
24	Muhammad Iqbal	31201-9115373-1	Project will prove helpful for people. They need to create Job opportunities for local people.
25	Abdul Gafoor	31201-0300029-5	Project will prove helpful for people. They need to create Job opportunities for local people.
26	Muhammad Pathan	31201-6714573-1	Project will prove helpful for people. It should be done.
27	Muhammad Shad	0301-4601734	Provide Job opportunities for local people.
28	Mushtaq Ahmad	31201-6297923-1	Project will prove helpful for people.
29	Muhammad Ali	0304-1041937	No Complain
30	Muhammad Riaz	0308-4641236	No Complain

S#	Participant	Designation	Concerns/Remarks
Responsible Authority			
1	Mr. Muhammad Babar Khan	Assistant Director Environment	<ul style="list-style-type: none"> • Environmental enhancement measures such as; Tree plantation, monitoring and safety should be ensured • Solid waste should be dumped properly • Preventive measures should be adopted to avoid any unfortunate incident • Tree plantation must be ensured
Other Departments			
1	Raja Amjad	Forest Department	<ul style="list-style-type: none"> • There is no endangered/indigenous species • However, plantation should be done to enhance environment
Proponent's Environment Management Team			
1	Proponent and Environment Management Team	Proponent and Environment Management Team	<ul style="list-style-type: none"> • Local employment will be ensured during construction phase • Tree plantation will be done to make project environment friendly • No waste will be dumped improperly • Quality will be ensured
Environmental Practitioners and Experts			
1	Dr. Muhammad Faqir Irfan	PhD. Environment Lawyer	<ul style="list-style-type: none"> • Health and safety arrangements must be provided • All type of waste should be managed to avoid nuisance
Affected and Wider Community			
1	Mr. Khurram	NGO (Parho Barho Punjab)	<ul style="list-style-type: none"> • Local employment should be ensured • Proponent shall work for betterment of community

5.6 RESULTS OF SOCIO-ECONOMIC DATA COLLECTION

The questions were designed in order to know that what inhabitants think about the proposed project and it was amazing to note that majority of the population think in the positive manner about the installation and expansion of new industries in their area. The people foresee strong impacts regarding employment, business and structural development due to this project. The management of M/S Dump Site Zakwan Builders & Developers (Pvt.) Ltd.. ensures its commitment towards maintaining the aesthetics and environmental quality of the area, land reclamation and providing job opportunities subject to relevant skills assessment of the local community during construction and operation of the project.

Table 5.2: Analysis community problem and solution

Main Theme	Concerns	Solutions
Employment	To engage local people during construction and operation phases on priority basis	M/S Dump Site Zakwan Builders & Developers (Pvt.) Ltd.. will engage local people on priority basis It will develop job opportunities

		for the locals based on skills assessment of individuals
Environmental Impact	Air pollution and noise impacts need to be properly mitigated	M/S Dump Site Zakwan Builders & Developers (Pvt.) Ltd.. will ensure water sprinkling for mitigation of issues related to dust/PM. Tree plantation act as natural noise barrier. Process and instrument efficiency ensure mitigating problems related to noise and air pollution.

Table 5.3: Awareness about project

Awareness Regarding the Proposed Project	Acceptability of the Proposed Project
Although people did not know the exact project; 80 % respondents were aware about the increased industrial activity in the area in upcoming years.	100% favored the Project with demand of job opportunities for the local

5.7 RESULTS

5.7.1. DEMOGRAPHIC PROFILE

The participants of the survey were interviewed to get information about their personal details such as age, education, marital status, religion, number of children and family size. The findings of the personal information are given below:

Age of Respondents

Respondents were asked about their age in which age of 20% of them were ranged between 20-30 years, 37 % respondents ages were 30 to 40years, 27% respondents age were 40 to 50 years, 16% respondents ages were more than 50 years.

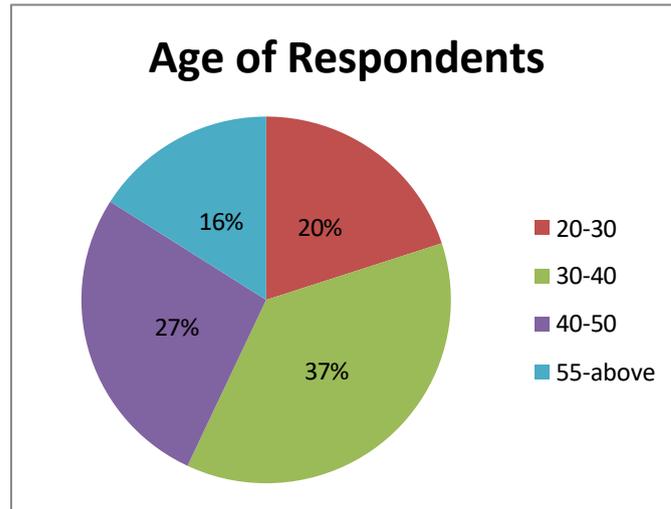


Figure 5.2: Graph Showing Age of Respondents

Education Level

During Survey respondents were asked about their educational level, 57% of them were uneducated, 33% were studied till middle level and 20% respondents reported that their educational level was primary respectively.

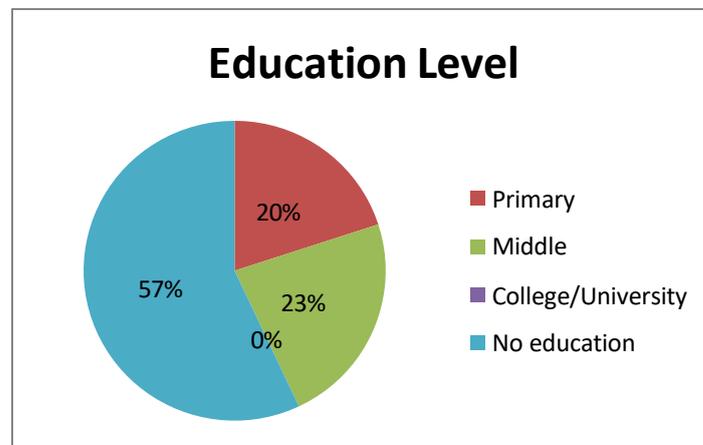


Figure 5.3: Graph Showing Educational Level of Respondents

Marital status

Respondent were asked about their marital status in which 87% respondents reported that they were married and rest were single.

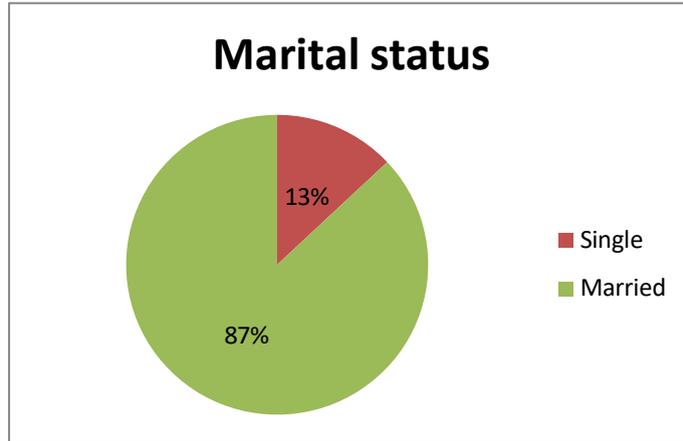


Figure 5.4: Graph Showing Marital Status of Respondents

Religion of Respondents

Respondents were asked about their religion in which all of them reported that they were Muslim as shown in figure 5.5.

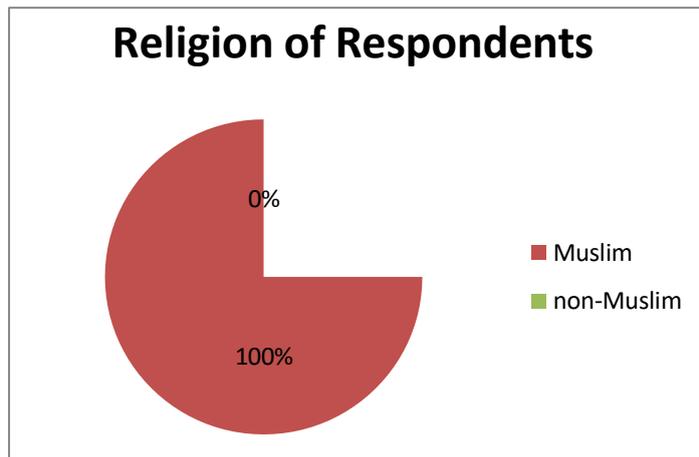


Figure 5.5: Graph Showing Religion of Respondents

Family size of respondents

During survey respondents were asked about their family size in which 10% reported that their family consists of two to four members, 26% and 67% respondents reported that their family size is five to seven and eight to twelve respectively.

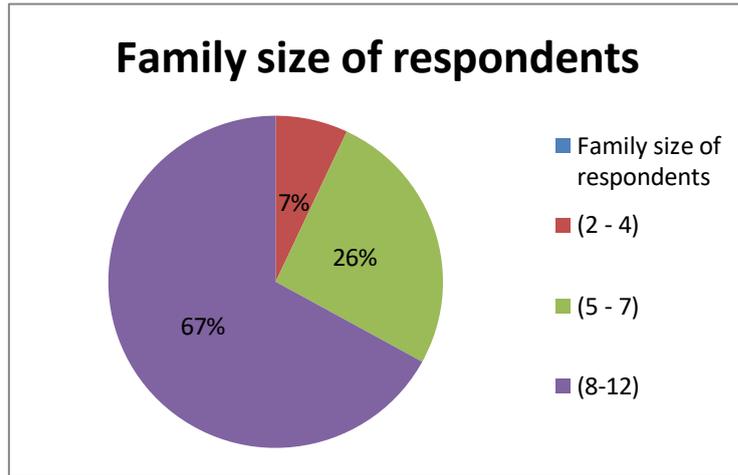


Figure 5.6: Graph Showing Family Size of Respondents

Number of Children

During survey respondents were asked about number of children they had and 20% respondents informed that they had no child, 33% had less than three children, 44% respondents had more than three, and 3% had more than seven children.

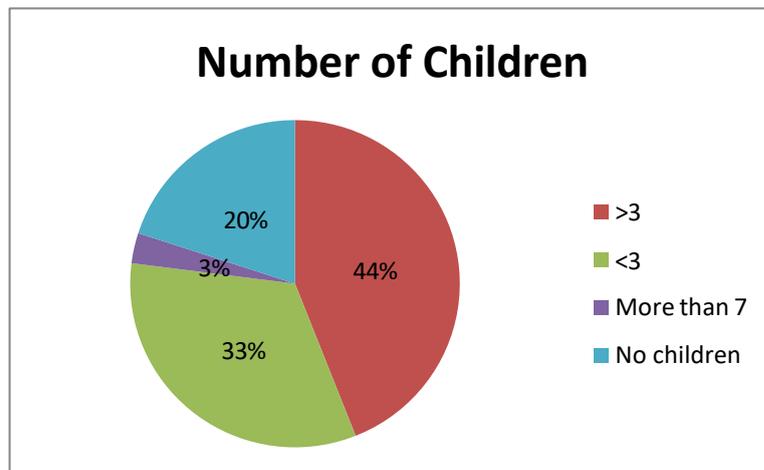


Figure 5.7: Graph Showing Number of Children of Respondents

5.7.2. SOCIOECONOMIC AND HEALTH STATUS

The socioeconomic status of the respondents was evaluated by getting information about their income level, sources of income and number of earning hands in the family.

Income Level

During survey respondents were asked about their income level (in PKR) 53% respondents reported that their income level was 5000 to 10,000, 30% respondents reported that their income level was 11,000 to 15,000, 10% respondents reported that their income level was between 16,000-25,000 and 7% of respondents had more than 25,000 income.

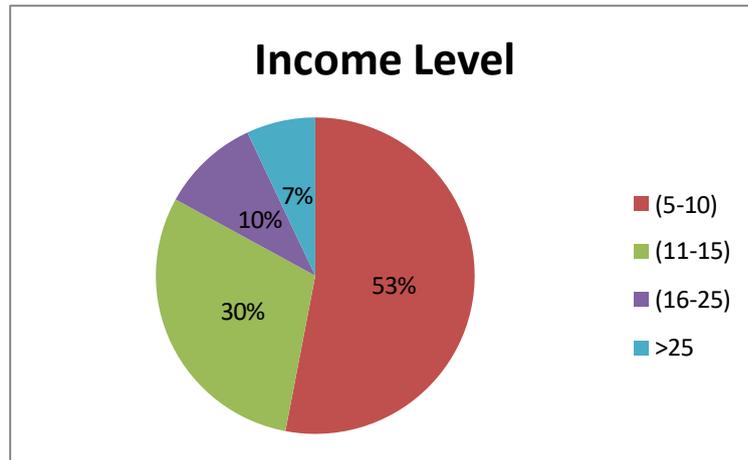


Figure 5.8: Graph Showing Income Level (PKR) of Respondents

Occupation & source of income

Respondents were asked about their occupation and 47% were land owners, 26% were labor, 17% were doing a job, and 10% were farmer.

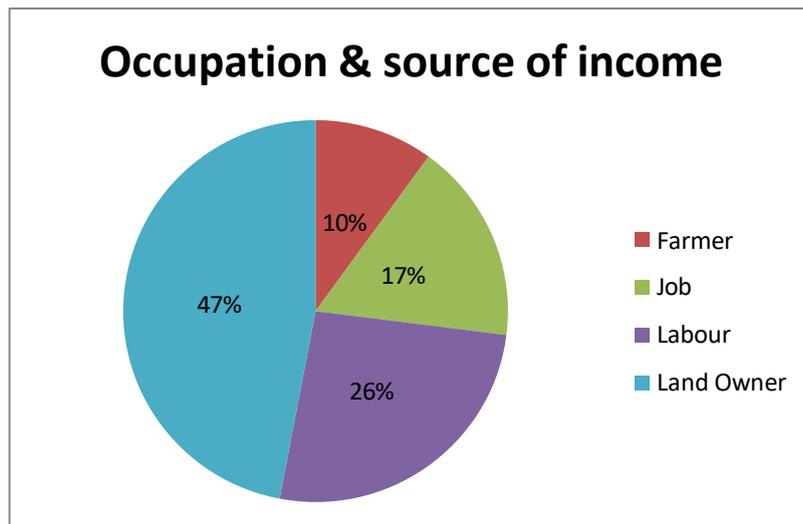


Figure 5.9: Graph Showing Occupation of Respondents

Earning Member in Family

About 57% respondents reported that there was only one earning member in their family, 30% respondents were having more than 2 earning members, 10% were having 3 earning members in their family and 3% were having more than 3 working family members.

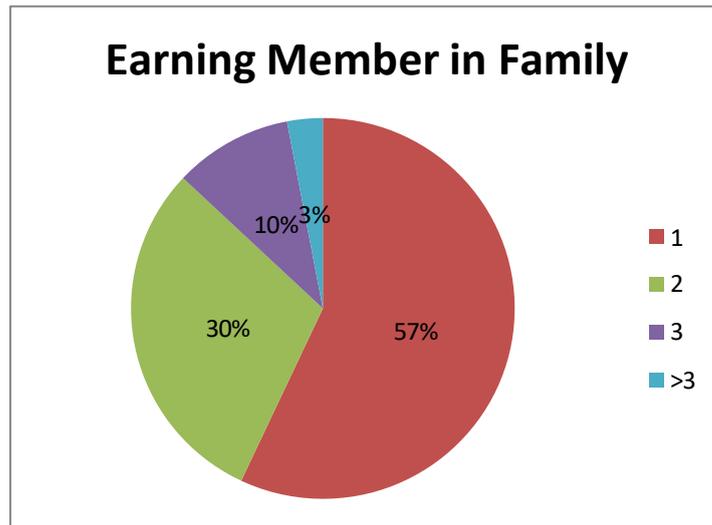


Figure 5.10: Graph Showing Earning Member in Respondents Family

Disease in Respondents

Respondents were asked about disease if they have 93% respondents reported that they had no disease and 7% respondents informed that they had disease. Blood Pressure, Diabetes etc in the family.

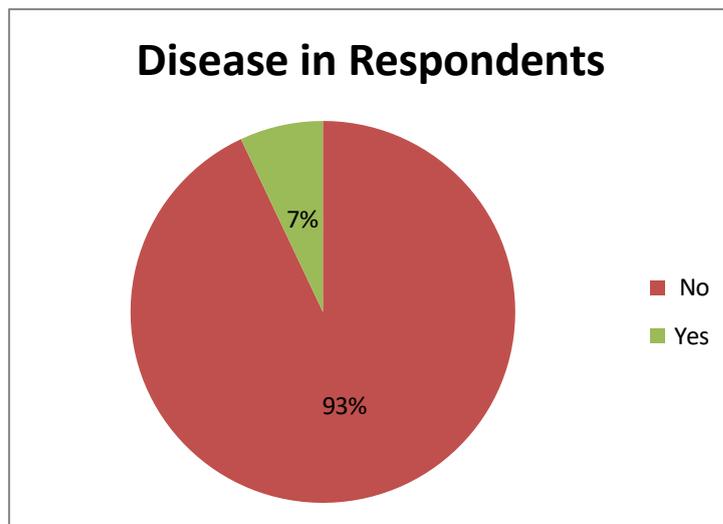


Figure 5.11: Graph Showing Disease

5.7.3. ANTICIPATED ENVIRONMENTAL IMPACTS

The survey group was asked about a few questions regarding their concerns about the environmental impacts of the proposed project. It included an array of questions regarding anticipated impacts on water, soil and air quality. They were also asked if they foresee generation of wastewater, solid waste and accidents related to project activity. These are summarized below:

Water

During survey respondents were asked about anticipated impact caused by project activity on Water. Interestingly, all of them answered as No Impact on water.

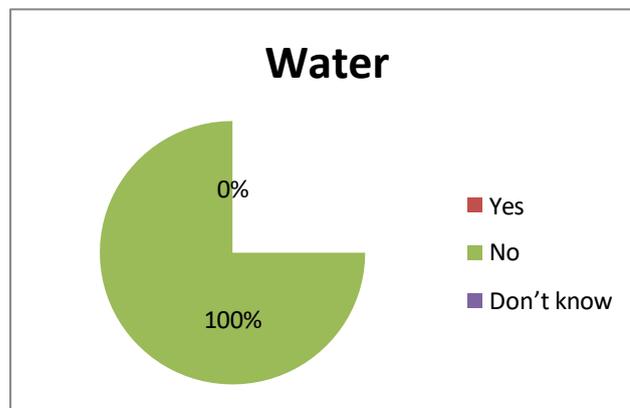


Figure 5.12: Graph Showing Impact Anticipated Caused by Project on Water

Soil

Respondents were asked about anticipated impacts on Soil and 85% respondents answer was No, while 15% remarked as “They don’t know”.

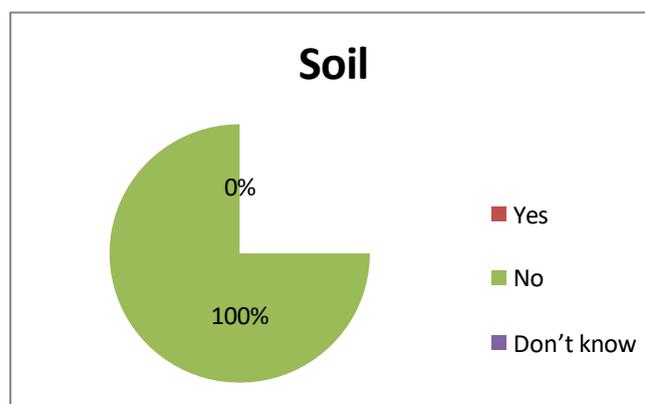


Figure 5.13: Graph Showing Anticipated Impact on Soil

Air

As per survey, 50% respondents remarked that they observed no impact on the air quality of the area and 10% of them remarked as yes, while 90% remarked no.

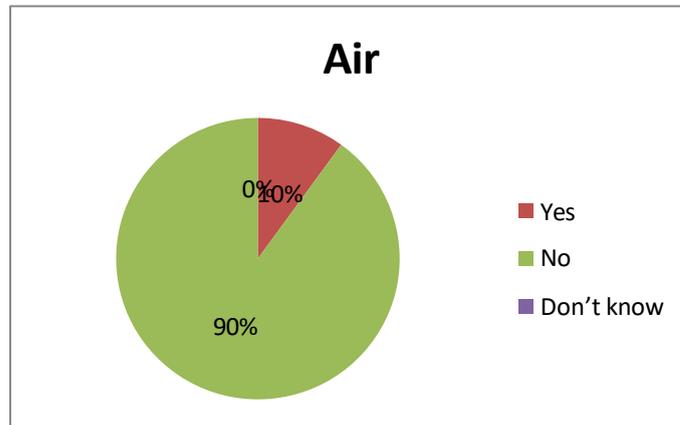


Figure 5.14: Graph Showing Anticipated Impact on Air

Noise

During survey, respondents were asked about anticipated noise pollution in the area and majority (97%) of respondents' response was no while 3% said yes.

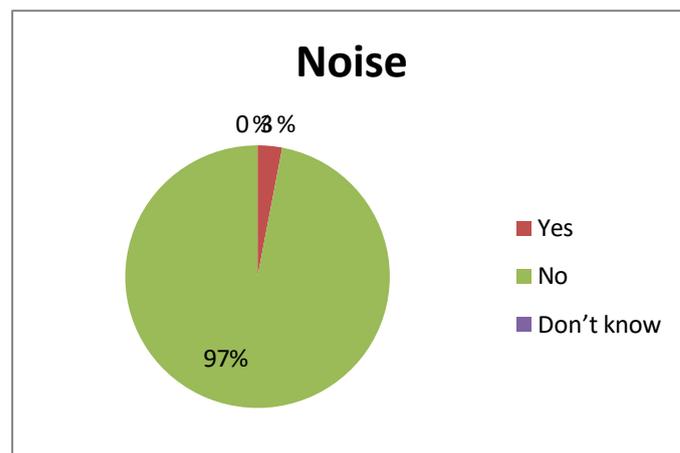


Figure 5.15: Graph Showing Anticipated Impacts on Noise

Solid waste

During survey respondents were asked about solid waste generation due to proposed project and most of them (100%) remarked as no impact has been expected while 0% remarked as Yes.

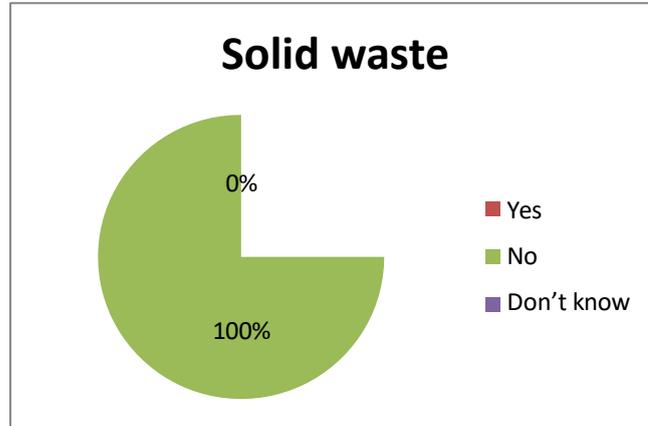


Figure 5.16: Graph Showing Anticipated Impacts of Solid Waste

Wastewater

About 100% of the participants of this survey informed that they didn't expect issue of wastewater due to project whereas no one of of them expressed their views as they didn't know about the impacts caused by proposed project.

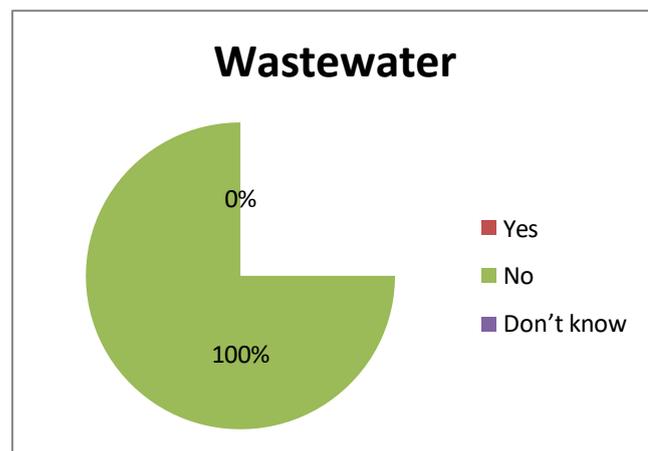


Figure 5.17: Graph Showing Anticipated Impacts Caused by Water Waste

Accidents

During survey respondents were asked about any accident that might be caused by proposed project site and majority (100%) of respondent's answer was No.

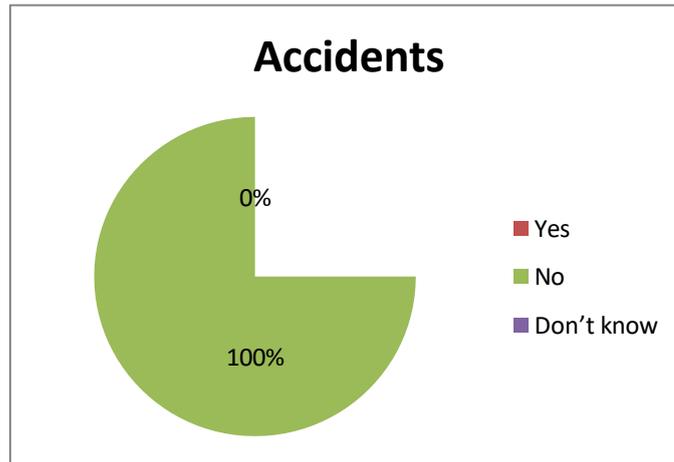


Figure 5.18: Graph Showing Percentages of Accident Anticipated by Project Activity

5.8 MAJOR FINDINGS

Following are the findings of the socioeconomic impact assessment:

- Most of the population was uneducated with a poor source of income. Also, the numbers of earning hands per family were less.
- According to collected data respondents were of opinion that project is good for business and employment. They were of the view that local people should be given preference for employment in the proposed project

5.9 STAKEHOLDER CONCERNS AND RECOMMENDATIONS

The community consultations demonstrated that goodwill towards the project proponent indeed exists. Approval for project activities by communities was evident. The consultations were considered a good gesture and were appreciated. Number of earning hands is such that communities are looking forward to any project proponent to improve their financial well-being to a great extent

During interviews with different inhabitants of the community, it was found that some of the people were aware and most of them were in favor the project only because they believed that such projects might provide job opportunities for people of the area. For them earning at any level is equally important. It is the most effective and attractive source of income for them.

It was observed through interviews that some of the diseases were seen more often with the seasonal variations, but still the common diseases narrated by the community inhabitant included heart problem, arthritis, paralysis, allergy and cancer.

After assessing the impacts of the proposed project of Dump Site Zakwan Builders & Developers (Pvt.) Ltd.. on socioeconomic and health status of local inhabitants, it was observed that the project had insignificant adverse socioeconomic and health impacts. The proposed environmental mitigation measures in EMP has adopted well, in fact the project proves to be beneficial for the people in regard to the job opportunities hence it also contributes in the improvement of socioeconomic status of the inhabitants. Socioeconomic and health status are interlinked. The project not only helps to provide support in terms of economic uplift but also helps in improving the health status of inhabitants and environment of the area.

SOCIAL MANAGEMENT PLAN

Potential socio-economic impacts to accrue from the project activity are described as under:

- The proposed Project has provided jobs to workers during construction and regular operations of the proposed site.
- Both Provincial and Federal Governments have received taxes and duties on recurring basis.
- Basic infrastructure of the area has improved.
- Supply of vendors' services is yet another opportunity of earnings for the people of the area.
- Supply of edibles like fruit, milk and other food items to project team is another source of income for the local.

Addition to the awareness of the people has set trends in getting education among the people of the project area. It has improved their social status thus bringing a lot of tangible change in the overall life style of the people.

Recommendations and Mitigation Measures

The following recommendations are made preliminary and will be adjusted based on the results of the Social Impact Assessment process.

Based on the initial benchmark study, the following preliminary recommendations will be further adjusted according to the results of the Social Impact Assessment process to be conducted at a later stage:

- The management of the Project can capitalize on the positive attitude of the people of area towards proposed Project by offering them maximum employment opportunities at the development stage and any stage of operational phase.
- Insufficient and inadequate socio-economic structure of the community of the area also provides ample opportunities to Company management by introducing meaningful and manageable plan of community development.
- Aggressive and comprehensive plantation plan can also lessen fear of local people towards environmental issues.
- Sustainable development approach through conservation of natural resources would be the best strategy to compensate negative socio-environmental impacts.
- Social responsible attitude and stewardship of company management towards local people and resources can make project people friendly.
- Prior to action of the Project installation a comprehensive awareness campaign may be launched at masses level to avoid any conflict.

5.10 CONCLUSION

Comparison of potential adverse and beneficial impacts of the proposed project shows that it has proved to be beneficial for the inhabitants of the area. The project implementation has provided job opportunities for the local inhabitants hence improve their socioeconomic status. Employment opportunities generated by the project include construction labor at the site in the initial stages of setting up of the proposed facility, skilled and unskilled labor and security (chowkidars) during the production phase. Additional employment opportunities are envisaged, such as provision of daily raw materials. Reliance on local markets for provision of construction materials and other supplies pose significant effect. Following mitigations are recommended for the anticipated social impacts:

- Opportunity for Employment generation for the local
- Environmental safeguard

The overall socio-economic impact of the project is interpreted in relation to the existing environmental conditions. It followed that such a development that is proposed can contribute in improvement of socio-economic and health status of inhabitants of the community if environmental management measures are adopted in true sense. The project, overall, does not have major adverse impacts on the existing environment and people. Suitable mitigation measures have been recommended to minimize the adverse impacts identified in this study. With due implementation of the mitigation measures, there would be very insignificant adverse impacts on the socio-economic environment.

CHAPTER VI

ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES

6.1 GENERAL

The potential environmental impacts related to the project have been studied in context of construction stages of the Project. Environmental protection measures are recommended to eliminate adverse impacts on environment or to reduce them to an acceptable level within the prevailing legislative and regulatory framework, although running plant is already working in environment friendly conditions. These Impacts are evaluated on the basis of magnitude, immediacy and sustainability. A careful consideration of project aspect, their potential environmental impacts and mitigation measures are proposed in this chapter. Evaluation criteria are as follow:

Magnitude:	Type of impact (direct, indirect, and cumulative)
Immediacy:	Temporal extent (during construction, after construction) Spatial extent (local, widespread)
Sustainability and	
Reversibility:	Mitigability (fully, partially)
Monitoring	(fully, partially)

6.2 OBJECTIVES

Objectives of screening all possible impacts and then providing their mitigation measures are:

- To find alternatives and ways of doing the project activities.
- To enhance the environmental and social benefits of proposal.
- To avoid, minimize and remediate adverse impacts.
- To ensure that residual adverse impacts are kept in acceptable limits.

6.3 IMPACT ASSESSMENT METHODOLOGY

6.3.1 SCREENING OF POTENTIAL IMPACTS

Based on site visit, observation, brain storming, provided information and social interviews, significant impacts were anticipated and evaluated. Then qualitative and

quantitative (where possible) assessment of these anticipated impacts is to be carried out.

POTENTIAL ENVIRONMENTAL IMPACTS OF THE PROPOSED PROJECT

An assessment of potential environmental impacts of the proposed project has been done and shown in table 6.1 which indicates the magnitude of the impacts.

Table: 6.1 Assessment Matrix of Impacts and their Magnitude of Proposed Project

Environmental Aspect	Activities														
	Pre-Construction Phase Activities		Construction Phase Activities					Operation Phase Activities						Decommissioning Phase Activities	
	Land Clearing	Placement of Provisional facilities	Excavation and leveling	Operation of construction machinery/generators	Transportation of construction material	Structural Development	Provision of basic facilities	Storage of raw material		Transportation of waste	Operation of generators	Improper disposal of solid waste	Improper disposal of liquid waste	Site Clearing	Improper disposal of waste
Land use	3- 9-		3- 9-			3+ 9-									
Soil erosion	2- 8-	1- 4-	3- 9-		1- 6-	2- 3-				1- 6-				1- 7	
Soil Quality	1- 7-		1- 7-	1- 7-	1- 3-	1- 4-				1- 3-					
Air quality	1- 9-		1- 9-	2- 9-	1- 9-	2- 9-		1- 6-	1- 10-	1- 7-	1- 7-				
Surface water quality															
Ground water quality				1- 5-		2- 8-									
Noise	2- 9-	3- 1-	3- 9-	2- 9-	1- 6-	3- 8-			2- 7-	3- 6-	1- 7-				
Flora	1- 8-		1- 8-	2- 6-											
Fauna	1- 8-		1- 3-	1- 3-											
Resettlement & Relocation															
Health issues	1- 8-	2- 3-	2- 8-	2- 9-	1- 7-	1- 8-		1- 7-	1- 7-	1- 7-					
Basic utilities (gas, electricity, telecommunication)									3- 9-			1- 5-			

supply)														
Road access		1- 3-		1- 7-	1- 9-	1- 9-				1- 7-				
Employment opportunities	8+ 10+			9.5+ 10+										

KEY

MAGNITUDE OF NEGATIVE IMPACT	INDEX FOR NEGATIVE IMPACT
NIL	
LOW	1-3 -
MEDIUM	4-6 -
HIGH	7-10 -
MAGNITUDE OF POSITIVE IMPACT	INDEX FOR POSITIVE IMPACT
LOW	1-3 +
MEDIUM	4-6 +
HIGH	7-10 +

6.3.2 IMPACTS ANALYSIS AND PREDICTION

Impacts analysis and prediction can be done by following techniques:

- Meetings
- Workshops
- Consultation / Case Studies

Impacts of the Project are predicted by consultation and case studies.

6.3.3 IDENTIFICATION OF MITIGATION MEASURES

After anticipation and screening of significant impacts, certain mitigation measures are to be provided in order to enhance benefits of project and reducing impacts.

6.3.4 EVALUATION OF THE RESIDUAL IMPACTS

Incorporation of suggested mitigation measures may reduce the magnitude of the environmental impacts of the project but sometimes, it may fail in bringing them within the acceptable limits. This step refers to the identification of the anticipated remaining impacts after mitigation measures have been applied.

6.3.5 IDENTIFICATION OF MONITORING REQUIREMENTS

The last step in the assessment process is the identification of minimum monitoring requirements. The scope and frequency of monitoring depends on the residual impacts. The purpose of the monitoring is to confirm that the impact are within the prescribed limits and to provide timely information if acceptable limits are being breached.

6.4 ANTICIPATED POTENTIAL ENVIRONMENTAL IMPACTS

Characterization is done on the basis of significance, probability and prevalence of the potential impacts in the surrounding environment. Primarily, anticipated impacts have been categorized as direct, indirect and induced. These groups of impacts can be further broken down according to their nature into:

- Positive and negative impact
- Minor, major and moderate impact
- Local and widespread impact

- Temporary and permanent impact
- Short and long term impact
- Reversible and Irreversible impact

CONSTRUCTION PHASE			
POTENTIAL NEGATIVE IMPACTS	RECOMMENDED MITIGATION MEASURES	MONITORING RESPONSIBILITY	PARAMETERS FOR MONITORING
Dust Emissions	On exposed construction surfaces during dry/windy periods fugitive dust generation will be suppressed by spraying of water	Proponent/Contractor	Air Quality
Soil Erosion	Exposed surface will be resurfaced and stabilized as soon as possible	Proponent/Contractor	Soil
Solid Waste Generation	Dedicated waste segregation units will be provided. Recyclable items will be provided to recycling contractors	Proponent/Contractor	Solid Waste Management
Health and Safety of Workers	All occupational health and safety requirements for workforce will be adhered to.	Proponent/Contractor	Health and Safety

OPERATION PHASE			
POTENTIAL NEGATIVE IMPACTS	RECOMMENDED MITIGATION MEASURES	MONITORING RESPONSIBILITY	PARAMETERS FOR MONITORING
Solid Waste	Waste will not be disposed off in the open and on-site burning of waste materials will be eliminated. Dedicated waste segregation units/containers will be built or placed.	Proponent	Solid waste Management

Noise Pollution	Generator and vehicles used during the operation will be properly tuned and maintained to minimize noise and air emission. The access road will be watered regularly to minimize dust emissions (if required).	Proponent	Noise Level
Waste Water	Contaminated water will be disposed off into municipal drains of nearest area.	Proponent	Water Quality

6.4.1 NOTION OF SIGNIFICANCE

Evaluation of impacts will be based on determining the significance of impacts as well as characteristics of impacts. Indicators considered for determining the significance include: predicted increase in the acceptable level (established standard e.g., PEQS and duration) in relation to key species life cycle and requirement for population maintenance, geographical extent of an effect, assimilative capacity of environmental attributes. To determine the significance of impacts on bio-physical and socio-economic environment of the proposed project, impact characterization is discussed and is given as Table for construction and operation phase.

The criteria used to define the significance of impacts in terms of low, moderate and severe impact are as follows:

Negligible/No Impact: The impact, which has unapparent and negligible influence on natural and socio-economic environment.

Low Adverse Impact: The impact, which has a slight influence on the natural and socio-economic environment.

Moderate Adverse Impact: The impact, which can be eliminated/ mitigated after applying the appropriate mitigation measures.

Severe Adverse Impact: The impact, which can be partially/ but not fully mitigated by applying the mitigation measure.

Positive/Beneficial Impact: The impact, which improve/enhance the natural and socio economic environment.

6.5 MITIGATION AND IMPACT ASSESMENT

Purpose of mitigation is to evade, reduce or balance the expected antagonistic effects in suitable way, to integrate these into environmental managing strategy or plan. At every stage of the project, mitigation plan for all the adverse impacts should be predictable and coasted to find out the best alternatives. The objectives of mitigation are to:

- Invent best substitution, means of better alternatives and ways of doing things
- Improve the environmental and societal payback of the project
- Prevaricate, remedying or reduce, provocative impacts
- Certify that remaining adverse influences are kept within permissible limits

6.5.1 PURPOSE OF MITIGATION MEASURES

Purpose of mitigation measures includes that what is the problem, when the problem will occur, when, where and how the problem should be addressed. The answers to these questions are given below:

a. What is the Problem?

As the project is the non-hazardous domestic/residential waste areas so the problem can be the impacts that could likely to cause from the activities involved in construction and operation phase of the project i.e. air pollution, noise pollution, solid waste, wastewater generation etc.

b. When Problem will occur and when it should be addressed?

Problem can occur during different phases when different activities are done through machinery or manual work. These problems may include noise, solid waste, liquid waste etc. These all problems should be addressed on the spot to avoid the adverse impacts.

c. Where Problem should be addressed?

As the problem is generating from the construction and operational of the project so it should be addressed on source i.e. site of the project.

d. How the Problem should be addressed?

Proper mitigations measures are being provided according to the nature of the impacts/ problems. Details of mitigation measures are further discussed in this chapter.

6.5.2 WAYS OF ACHIEVING MITIGATION MEASURES

a. Changing in Planning and Design

As the proposed project is planned as per feasibility assessment so there is no need of changing in planning and design of the Project.

b. Improved Management & Monitoring Practices

Improving activities will be carried out for betterment while monitoring will also be conducted to keep environment friendly throughout the operation of the project.

c. Compensation in Money Terms

There is no damage of fauna, flora or any other resource. So, compensation in money is not needed.

d. Replacement/ Relocation/ Rehabilitation

Project site is located where there is no sensitive area, population or natural resource. So, replacement, relocation and rehabilitation are not required.

6.6 ENVIRONMENTAL PROBLEMS DUE TO PROJECT LOCATION

A) CHANGE IN LANDUSE PATTERN

Any new intervention has its first and foremost impact of changing the land use pattern of the area. The impact of this nature is irreversible therefore site selection needs to have careful consideration of the impacts that may arise due to the changes in land use patterns.

The present land use of the area available for the construction of dump site is an open land. It would be changed after the construction of the project.

MITIGATION MEASURES

Prior to selection of site, the project proponent had careful consideration of the land use on the site. The project area is around industrial area and the land is already owned by the proponent. Another factor adding to the feasibility of the project site was that it is away from the residential areas so there will be no nuisance to the general public.

Mitigation measure will involve tree plantation along the boundary wall (inside and outside) and landscaping on the remaining land other than the built-up structures and parking areas.

B) PRESSURE OF RESOURCES

Another impact to be considered prior to site identification is the availability of already existing resources e.g. water, gas, electricity, etc. any new intervention can exert pressure and marginalize the existing community. This could eventually create a sense of deprivation among the already existing community and may eventually result in social unrest.

MITIGATION MEASURES

Considering this very important factor, the site identification was done after evaluating the extent of provision of resources. The water requirements, energy requirement, social services can be approached easily.

This situation will further be discussed in the mitigation measures proposed for project operations.

C) NATURAL HAZARDS

It is very important to assess the extent of damage any natural hazard e.g. earthquake, floods, landslides may cause.

MITIGATION MEASURES

The proposed site identified within environmentally /geologically safe and does not fall in any of the earthquake zones in which the capital territory is divided.

D) AVAILABILITY OF EXISTING INFRASTRUCTURE AND SERVICES

Unavailability of infrastructure can render the entire project void and impractical due to absence of important community infrastructure.

MITIGATION MEASURE

The project is well connected to the city through roads hence making the location ideal for the project.

E) DISPLACEMENT OF LOCAL COMMUNITY

Displacement of local community can tend to create social issues and aggravate negative feelings from the existing population towards the project.

MITIGATION MEASURES

The project is planned on a site which has already been acquired by the proponents after going through its socio-culture, environmental and economic considerations.

6.7 ENVIRONMENTAL PROBLEMS DUE TO PROJECT DESIGN

Impact significance: moderate to high or may be negative

Nature of impact: direct

Duration: Long-term

Timing: Constructional phase & Operation phase

Reversibility: NA

Likelihood: moderate to high

Consequences: moderate to high or may be negative

A) INCREASED ENERGY CONSUMPTION

The design of building plays a vital role in determining the energy demand. Unplanned design may lead to overall rise in energy demand.

MITIGATION MEASURE

Building of the project will be ventilated and environmental friendly in terms of more utilization of day light in order to conserve the energy resources. Project proponent is committed to provide all these provision in the design of the project.

B) TRAFFIC CONGESTION

Unplanned traffic management and traffic infrastructure development may lead to traffic related issues such as accidents and traffic congestion.

MITIGATION MEASURE

The project has included traffic management as integral part of its overall design. The project construction activities are planned within the boundary walls. Transportation of heavy construction materials will be done during less traffic hours. Also, the project site is away from any heavy traffic area.

Management of vehicle movement will be done to avoid traffic jam and long queues.

Parking of vehicles alongside the road should be prohibited at all time.

C) FIRE EXITS /EMERGENCY EVACUATION PLAN

Emergency evacuation plans is necessary to curb fire issues due to electric short circuit etc.

MITIGATION MEASURE

The project proposes Emergency Evacuation Plans in events of fire hazards. Quality of wiring work and gas lines will be ensured through installation of good quality wiring during construction and proper monitoring during operational phase. The site will be equipped with proper firefighting equipment to ensure increased safety. Water and foam fire extinguishers will be fixed vertically at 5 ft. height from the ground for easy access.

D) ACCESSIBILITY TO PUBLIC UTILITY / SERVICES

Inaccessibility to public utilities will render the project uninhabitable.

MITIGATION MEASURE

This is not going to create any issues since the proposed site is planning to develop an extensive network of utilities. Public utilities will not be used during any stage of the project life cycle.

E) CAREFUL PLANNING OF GREENBELTS/HORTICULTURE PLAN

Unavailability of greenbelts would create aesthetic nuisance.

MITIGATION MEASURE

The design of proposed project involves establishment of green belts and develop aesthetically crafted lawns around the project building to increase its aesthetic value.

F) UNDERGROUND SEWER /DRINKING WATER LINES

Wires and pipelines lay open and above surface may consequently give rise to leakages, contamination and short circuits in the lines.

MITIGATION MEASURE

There will be no any such issue at the proposed project site because the site is devoid of any such infrastructure. However, during the installation of underground pipe lines, the project engineer will make sure that the contractors and team of workers are well aware of precautionary measures needed to curtail any such issue.

6.8 ENVIRONMENTAL PROBLEMS DUE TO PROJECT CONSTRUCTION

6.8.1 IMPACTS ON PHYSICAL ENVIRONMENT

A. LOSS OF VEGETATION COVER / BIODIVERSITY

The site has minimal vegetation cover including the grass and shrubs. The proponent intends to clear part of the land to create room for developing the proposed sitz. On completion of the development it is recommended that the proponent should plant trees on the unoccupied land to attain aesthetic beauty.

Impact significance: Low

Nature of impact: Direct

Duration: Short-term

Timing: Constructional phase

Reversibility: NA

Likelihood: moderate

Consequences: Very Low

MITIGATION MEASURE

- After completion of the project the proponent will rehabilitate the land by planting trees and ornamental flowers on the disturbed and undisturbed areas.
- Project implementation will disturb as little area as possible in order to minimize potential impacts to biodiversity.
- Working should be in such a way that minimum excavation is involved.

B. AIR QUALITY

Air quality will be affected by fugitive dust emissions from construction machinery; dust from the unpaved surface and construction vehicles. The critical sources of dust pollution during the construction phase will be

- Unpaved road surface
- Transportation of materials and other construction activities that create dust emissions
- Air quality deterioration, particulate matter/dust emissions due to construction activities; stand by generator, equipment's and vehicle.

Impact significance: Low

Nature of impact: Direct

Duration: Short-term

Timing: Constructional phase

Reversibility: NA

Likelihood: moderate

Consequences: Very Low

MITIGATION MEASURE

- The construction materials e.g. soil, clay would be covered appropriately.
- Sprinkling of water on track will reduce dust pollution
- Provision of dust masks for workers.
- Air quality monitoring is recommended on regular base
- Proper paved road infrastructure is recommended
- All vehicles, machinery, equipment and generators used during construction activities should be kept in good working condition and be properly tuned and maintained in order to minimize the exhaust emissions
- Blowing of dust and particulate matter from stockpiled loose materials (e.g.sand, soil) should be avoided either by sheeting them with tarpaulin or plastic sheets or by sprinkling them with light shower of water
- Open burning of solid waste from the Contractor's should be strictly banned

C. NOISE GENERATION

Noise is a by-product of human activity, and area of exposure increases as function of mobility and construction activities. Sources of noise during construction are heavy machinery such as bulldozers, excavators, stabilizers and other equipment. Noise emissions due to transportation, movement of heavy materials, generators may create health nuisance for the workers and local community.

Impact significance: Low

Nature of impact: Direct

Duration: Short-term

Timing: Constructional phase

Reversibility: NA

Likelihood: moderate

Consequences: Low

MITIGATION MEASURE

- Selection of up-to-date and well-maintained plant or equipment with reduced noise levels ensured by suitable in-built damping techniques or appropriate muffling devices
- Confining excessively noisy work to normal working hours in the day, as far as possible
- Providing the construction workers with suitable hearing protection like ear cap, or earmuffs and training them in their use
- Preferably, restricting construction vehicles movement during night time
- Vehicles and equipment used should be fitted, as applicable, with silencers and properly maintained
- Use of low noise machinery, or machinery with noise shielding and absorption
- Contractors should comply with submitted work schedule, keeping noisy operations away from sensitive points; implement regular maintenance and repairs; and employ strict implementation of operation procedures

D. WATER RESOURCES

There is no significant surface water resource of the project area so there will be no impact on surface water quality during the construction of the project area. Persistent and prolonged withdrawal of groundwater higher than the safe yield limits of the aquifer can initiate early depletion of aquifer. This situation can result in reduced water supplies for other users who share the same groundwater resource. Abstraction of the groundwater over and above the safe yield limit can produce serious hydrological and environmental consequences.

These impacts are temporary and minor negative in nature

Impact significance: Low

Nature of impact: Direct

Duration: Short-term

Timing: Constructional phase

Reversibility: NA

Likelihood: moderate

Consequences: Low

MITIGATION MEASURES

- Water required for construction is obtained in such a way that the water availability and supply to nearby communities remain unaffected
- Regular water quality monitoring according to determined sampling schedule
- Prohibit washing of machinery and vehicles in surface waters
- Continuous withdrawal and over pumping of groundwater should be avoided. Instead, intermittent pumping be carried out to conserve the groundwater resources

E. SOIL EROSION

Loss of vegetation cover and trees may lead to soil erosion hence resulting in dust emission and loss of fertile land cover.

Impact significance: Low

Nature of impact: Direct

Duration: Short-term

Timing: Constructional phase

Reversibility: NA

Likelihood: moderate

Consequences: Low

MITIGATION MEASURE

The construction activities shall be planned in a way that reduces the chances of vegetation cover loss and its consequent soil erosion issues. Soil erosions are due to wind and water. The proposed project is planned for construction during the coming months after Environmental Approval, which are dry and sunny. Hence, the probability of soil erosion due to natural factor will be negligible to none.

F. SOLID WASTE GENERATION

Unplanned dumping of solid waste generation during construction phase can lead to blockage of roads, waterways and also create unaesthetic sight of the proposed location.

Impact significance: Low

Nature of impact: Direct

Duration: Short-term

Timing: Constructional phase

Reversibility: NA

Likelihood: moderate

Consequences: Moderate

MITIGATION MEASURE

Solid waste generation quantity during construction phase shall be reused in construction activities rather than dumping. The solid waste during construction phase will consist most of soil, packaging materials, plastic bags, cloths, iron rods, and food leftovers. The organic portion of solid waste shall be collected by sanitary workers of that area. Training of working force in the storage and handling of materials and chemicals that can potentially cause soil contamination. Solid waste generated during construction and camp sites will be safely disposed in demarcated waste disposal sites or handed over to the contractor.

G. WASTEWATER GENERATION

Unplanned wastewater disposal may contaminate the surface water channels, surface soil and depending upon the quantity of wastewater generated, it has a potential to contaminate the ground water aquifers.

Impact significance: Low

Nature of impact: Direct

Duration: Short-term

Timing: Constructional phase

Reversibility: NA

Likelihood: moderate

Consequences: Moderate

MITIGATION MEASURE

Wastewater generated during construction and domestic activities will be stored temporarily in septic systems comprising of septic tanks from where it will be routed to local drain. Waste segregation measures will be employed to minimize entry of solid waste into the wastewater stream. An appropriately designed septic tank will be used to treat sewage/waste water to achieve PEQS. Periodic cleaning of the septic tank is recommended.

H. HEALTH AND SAFETY

Health risks and work safety problems may result at the workplace if the working conditions provide unsafe and/or unfavorable working environment and due to storage, handling and transport of construction material. Workers should be provided with safe and healthy working environment taking into account risks inherent to the particular sector and specific classes of hazards in project area. Mitigation measures will include:

Impact significance: Low to Moderate

Nature of impact: Direct

Duration: Short-term

Timing: Constructional phase

Reversibility: NA

Likelihood: moderate

Consequences: Moderate

MITIGATION MEASURES

- Providing basic healthcare training to specified work staff and basic healthcare service and supplies to workers
- Layout plan for site, indicating safety measures taken by the contractor, e.g. firefighting equipment, safe storage of hazardous material, first aid, security, fencing, and contingency measures in case of accidents
- Work safety measures and good workmanship practices are to be followed by the contractor to ensure no health risks for laborer's
- Protection devices (ear muffs) should be provided to the workers doing job in the vicinity of high noise generating machines
- Provision of adequate sanitation, washing, cooking and dormitory facilities including light up to satisfaction
- Provision of protective clothing for laborers handling hazardous materials, e.g. helmet, adequate footwear for bituminous pavement works, protective goggles, gloves etc.
- Ensure strict use of wearing these protective clothing during work activities
- Instruct foremen to strictly enforce the keeping out of non-working persons, particularly children, off work sites

- Adequate signage, lightning devices, barriers, yellow tLion and persons with flags during construction to manage traffic at construction sites, haulage and access roads.

6.8.2 IMPACS ON SOCIO-ECONOMIC ENVIRONMENT

A. ECONOMIC ACTIVITY

Due to the construction of the proposed Project, economic activity will be generated in the project area as the laborers and semi-skilled staff will have an opportunity to work for the construction of the proposed project. This will help in developing their skills and capacities. This is a moderate positive impact.

B. LIFESTYLE AND CULTURE

There are chances of arising of issues related to cultural differences/conflict between the Contractor's workforce and the local inhabitants, conflicts arising due to the mix of local and migratory job seekers as the use of local resources and products will be increased. In this situation, local residents may resist contractor's workforce attitudes, cultural clashes particularly when local/international contractors are engaged, social disturbance and dissatisfaction with employing outsiders may arise. This impact is temporary and minor negative in nature.

MITIGATION MEASURES

- Timely public notification and announcement of mobilizing equipment
- Local labor should be employed for construction works

6.8.3 IMPACT ON BIOLOGICAL ENVIRONMENT

There is no any fauna or flora is present on the proposed project site. Few trees are there. On their behalf a complete plantation plan has been provided.

6.9 ENVIRONMENTAL IMPACTS DURING OPERATIONAL PHASE

The positive and negative impacts of subject project, during its operation are discussed below:

6.9.1 IMPACTS ON PHYSICAL ENVIRONMENT

A. AIR QUALITY/PARTICULATE MATTER (DUST)

Vehicular/ equipment engine exhaust emissions will be minor and temporary during construction. Air quality impacts will be temporary during construction. The project will not generate significant vehicle trips to the area. Vehicular and equipment exhaust emissions during project operations will, thus, have a minor incremental/cumulative impact locally and regionally. Particulate matter (dust) would be generated by grading, excavation and the movement of construction vehicles.

During the operations major potential point sources of particulate matter (dust) and gaseous emissions in and around the proposed premises are expected to be as follows;

- Emissions from this point are hydrocarbon residuals, carbon dioxide, carbon oxide, nitrogen oxides and sulphur oxides from fuels and related generator

ASSESSMENT OF IMPACT

DUST EMISSIONS:

Dust emissions can cause by vehicular traffic on dirt track will be an important concern, primarily when such traffic will pass near community settlements. Dust emissions will cause the amount of particulate matter in the air to increase, and can become a health concern. Dust clouds can also reduce road visibility.

GASEOUS EMISSIONS:

Emissions will be produced by generator in terms of the resulting pollutants (SO₂, NOX, PM, etc.).

Nature of impact: Direct

Duration: long term

Timing: operation

Reversibility: irreversible

Likelihood: moderate if mitigation measures will be ensured.

Consequences: moderate, if pollutant levels in the ambient air will be control within acceptable limits by adopting proper mitigations.

Impact significance: moderate, based upon low likelihood and mild to moderate consequence.

MITIGATION MEASURES:

- Workers should wear dust masks and other respiratory PPEs before entering the processing halls.
- Water spraying should be practiced where required.
- Regular monitoring

B. EFFLUENT DISPOSAL

Discharging wastewater into open drainage system around the premises would subsequently be carried into public water sources through surface runoff. Wastewater will be generated due to the domestic activities.

Nature of impact: Direct

Duration: Short term

Timing: operation

Reversibility: Not applicable

Likelihood: Low

Consequences: Mild

Impact significance: Low.

MITIGATION MEASURES

- Wastewater that is finally disposed of, will be in limits of NEQS
- The domestic wastewater will be collected properly through a network of pipeline and then it will be discharged into municipal sewer treating through

septic tank.

C. SOLID WASTE MANAGEMNET

STORAGE OF WASTE

The project site will be available for temporary storage of waste. This could create impacts of major significance if not properly handled and supervised. The tanks have inlet and outlet valves to dump and emptying the tank. There will be a need to prevent the waste from scavengers, sunlight and rain. Also there will be measures to prevent scattering of waste with wind and nuisance from smell and odor.

Nature of impact: Direct

Duration: Short term

Timing: operation

Reversibility: Not applicable

Likelihood: Low (unlikely) if mitigation measures will ensure that Solid waste management in efficient way.

Consequences: Mild, as it will be removed from site within few hours

Impact significance: Low, based upon low likelihood and mild to moderate consequence

MITIGATION MEASURES

- Identification of all waste streams.
- Quantify and characterize the waste streams.
- Recyclable materials should be separated at source.
- No waste should be dumped at any location outside the boundary.
- Separate, labeled dust bins should be placed within the premises to collect different nature of waste separately
- Record of all waste generated should be maintained. Quantities of waste, disposed, recycled or reused should be logged on.
- Training should be provided to personnel for identification, segregation and management of waste..
- The tanks/rooms will be marked as storage facility.
- The workers will wear personal protective equipment like Gas mask, gloves, and safety shoes before entering the storage tank.
- Ensuring the housekeeping of area around the storage tanks and especially inside the facility.
- The storage tank must be marked as storage facility.
- The workers must wear personal protective equipment like Gas mask, gloves, overall and safety shoes before entering the storage tank
- Ensuring the housekeeping of area around the storage tanks and especially inside the storage tank

D. ENERGY CONSERVATION

Excessive use of energy exerts more pressure on the already dwindling energy resources of the city/country.

MITIGATION MEASURE

The workers/employees will be encouraged to follow energy conservation strategies during operational phase. Daylight will be preferably used during day. Machineries and equipment will be maintained to avoid extra fuel consumption.

E. NOISE LEVEL

Noise is the major concern during the operation phase. It can be generated from the traffic on the road and from the machinery used for operations.

Nature of impact: Direct

Duration: long term

Timing: operation

Reversibility: Not applicable

Likelihood: low

Consequences: slightly significant

Impact significance: moderate, based upon low likelihood and mild to moderate consequence.

MITIGATION MEASURES

Any activity that leads to noise pollution will be restricted. There will be no noise due to operation of the project. Workers will be provided with the safety equipments to protect themselves. Ear plugs and ear muffs will be provided to the workers.

F. TRANSPORTATION

Transportation of raw material for safety stuff manufacturing to and from the project site creates a probability of accidental spills and fire.

MITIGATION MEASURE

- Transportation vehicles will be maintained in good conditions to avoid the chances of accidents.
- There will be a proper mechanical department where maintenance of machinery and vehicles will be monitored regularly.

G. EMERGENCY/FIRE HAZARDS

Emergencies e.g. fire incidents may lead to environmental, health and safety issues to the local residents.

MITIGATION MEASURES

Emergency exits in every department and certain points of plant will be installed. Firefighting equipments will be provided and adequate trainings will also be provided to tackle any situation of fire hazards. Contacts of concerned departments like fire brigades, police, first aid, etc. should be displayed at prominent places in the project's building.

H. TRAINING OF STAFF

Unskilled persons will not be able to tackle environmental, health and safety related situations which may further aggravate any such issues and cause loss of human life and property.

MITIGATION MEASURE

Regular training of the staff will be conducted. Proper monitoring and reporting mechanism will be developed where the team is responsible to communicate/report any illegal or hazardous situation to the team leader.

6.9.2 IMPACTS ON BIOLOGICAL ENVIRONMENT

A. FLORA

The project site is devoid of any significant vegetative cover. Only few bushes may be present. Nil impact is envisaged.

B. FAUNA

The fauna including wildlife species do not exist at the project site. The impact will be nil.

6.9.3 IMPACTS ON SOCIO-ECONOMIC ENVIRONMENT

A. SAFETY

It includes Occupational Hazards like physical injuries arising from accidents such as being hit by falling weak structures, being overrun by heavy equipment and etc. The major safety issues in operational phase are:

- Electrical hazards
- Machine guarding
- Eye, head and foot protection
- Fire and explosion hazards
- Housekeeping Issues

MITIGATION MEASURES

- Care will be taken to properly ground and insulate all equipment.
- Standard procedures for confined space entries will be displayed in written form.
- Proper machine guarding, which is critical for the prevention of injuries to workers by isolating them from moving machinery, will be provided.
- Head, arms and foot PPE's will be provided.
- Emergency Eye wash equipment should be placed in chemical room.
- Firefighting equipment will be available in the form of ABC fire extinguishers as a minimum, and their locations will be clearly marked.
- Exits from work places will be well marked and visible in dim light.
- Housekeeping will be frequent and thorough to prevent slips, trips, and falls.

- Workers will be told and encouraged to use PPEs as may be standardized.
- Workers' awareness and safety wall chart showing safety symbols will be displayed.
- First Aid Box will be kept in easy approach of all in case of any injury or mishap.
- Basic pand health facilities will be provided to all employees.
- Safety, health and educational drive should be given to residents living near the construction site.
- Safety and warning devices such as reflectors, lights, etc. shall be installed at designated spots.

B. LAND VALUE

Land value in the surrounding area will increase due to completion of the present project. Impact will be moderate positive.

C. RESETTLEMENT ISSUES

Dislocation of Population

The project does not involve dislocation of the people. There is no requirement of resettling a single person. Impact is nil. The nearby residential area named as Jagger Abbaspur is located 1km away, Basti Khokhran is located at an aerial distance of 2.1km and Tibbi Izzat is located at an aerial distance of 2.6km away from the proposed project site.

Loss of Property/Infrastructure

No movable or immovable property and infrastructure of public and private sectors will be lost or damaged during construction and operation stages. Impact will be nil.

Undertaking

The proponent has committed to comply with the relevant construction by-laws/ safeguards and the environmental enactments for the environmental preservation. Project proponent has given Undertaking and Affidavit respectively.

6.10 IMPACTS ASSOCIATED WITH DECOMMISSIONING PHASE

6.10.1 IMPACT ON PHYSICAL ENVIRONMENT

A. SOIL DISTURBANCE

Soil erosion may be caused by exposure of soil surfaces during site clearing, earth moving, and excavation activities. Soil disturbance will loosen the soil and make it exposed to the agents of erosion i.e. wind and water.

MITIGATION MEASURES

Following mitigation measures can be adopted:

- Scheduling to avoid heavy rain fall periods (i.e. during the dry season) to the extent practical.
- Mulching to stabilize exposed areas.

B. SOLID WASTE GENERATION

Solid waste will be generated in form of spoil soil, obsolete pumps, pipes, machinery etc.

MITIGATION MEASURES

Following mitigation measures can be adopted:

- Timely collection and disposal of solid waste.
- Recyclable waste should be sell out to the recycle market or any relevant customer.

C. HEALTH AND SAFETY IMPACTS

Health and safety risks may occur during decommissioning of infrastructure i.e. open pits hazard, fire hazard, fall hazard, noise and vibrations due to machinery used for dismantling of equipment.

MITIGATION MEASURES

- Following mitigation measures can be adopted:
- Employees should be provided with personal protective equipment and required to use impervious clothing, gloves, face shields and other appropriate protective equipment.

- Work permits to carry out dangerous works i.e. permit to work in confined spaces, work at heights and work with dangerous chemicals etc.
- Increased demand on health care services.
- Contact with local health service and cooperation established between both parties.
- Emergency preparedness plan in place.

5.11 POTENTIAL ENVIRONMENTAL ENHANCEMENT MEASURES

Several measures have been proposed for enhancing the environment and social aspects including planting of trees, green belt development, construction of retaining walls and guardrails, providing sign boards, preserving and landscaping cultural properties etc.

Following necessary measures will be adopted during construction and operation:

- The design of the building will be planned in consultation with the Environmentalist, Geotechnical experts and building engineers, to mitigate the possible negative impacts related to the project design.
- Necessary provisions or enhancement measures will be incorporated in design of the building such as location and points of firefighting equipments, locations of assembly points & emergency exits with quantity, location of the waste water treatment facility, area of plantation, design of the building showing proper elevation & ventilation, properly marked sewerage system etc.
- Sprinkling of water will be done during constructional activities on dusty road and tracks.
- PPEs will be provided during every stage of project. Special PPEs will be provided to the workers for ensuring their health and safety from asbestos disposal. These include disposable protective clothing and coveralls, a head cover, and foot covers made of a synthetic fabric which does not allow asbestos fibers to pass through. This type of clothing is significant to prevent workers' regular clothing from becoming contaminated with asbestos fibers. SOPs for Asbestos sheet/material removal, Handling, Transportation and dumping are attached as annex-9 with this report.
- Constructional waste and domestic solid waste will be disposed-off or utilized properly.

- Machinery will never be left unattended.
- Efforts should also be made to discuss traffic conditions so that regular traffic is not disturbed. Transporters engaged for the project would be forced to adhere to the load specifications of the access road. No overloading would be allowed in any case.
- Safety signs and boards will be placed wherever required.
- Air pollution controlling devices will be installed within the project during operation (if required).
- Machinery will be kept maintained.
- Domestic waste water will be treated through septic tank that will be installed within the unit.
- Noise will be controlled by adopting proper measures.
- Firefighting equipments and system will be installed.
- Hygienic conditions will be ensured and proper quality will be maintained by quality control testing.
- First aid facilities will be made available.
- Precaution and safety measures will be adopted and followed for health & safety, filling.
- Any possible measure will be adopted to make the project safe and environmental friendly.
- Area will be restored with native plants. A proper tree plantation plan will be formulated to save the environment.

GREEN BELT DEVELOPMENT

- Adequate number of saplings will be planted all along the periphery of the plant, roadways and available open spaces. Apart from functioning as a pollutant sink, green belts provide other benefits like:
 - Green belt helps in noise abatement for the surrounding area.
 - Green belt increases the aesthetic value of the site.

TREE PLANTATION

Tree plantation and cropping within the premises have been planned by the proponent for environmental enhancement. The proponent will also make arrangements for protection and maintenance of trees. Tree plantation will be done around the boundary walls of the project site. Also, the open area will be planted with ornamental plants for

beauty having height of 6-7ft. Preferably native species will be planted in accordance with the quantity provided by the EPA in its Environmental Approval. Some native species that have been identified for this particular project are provided hereunder in the table.

Table 6.1: Trees to be Planted

Sr. No.	Scientific Name	Local Name
1	Acacia Karoo	Kikar
2	Erythrophleumsuaveolen	Tali
3	Eucalyptus Globus	Safaeda
4	Dalbergia Sissoo	Sheesham
5	Acacia nilotica	Babul

CHAPTER VII

ENVIRONMENTAL MANGEMENT AND MONITORING PLANS

7.1 GENERAL

The purpose of developing this Environmental Management and Monitoring Plan (EMMP) is to provide a dynamic guideline to the concerned stakeholders to define details of who, what, where and when environmental management and mitigation measures are to be implemented besides providing the contractors and proponents better on-site environmental management control over the life of the project. The scope of this Environmental Management and Monitoring Plan includes the activities during operational. However, to ensure the compatibility of the Environmental Management and Monitoring plan in accordance with the changing socio-cultural, economic and environmental factors, it would be used as a dynamic tool which means that the EMMP would undergo necessary modifications to keep catering to the changing environmental needs of the project.

Table 7.1: Users of this EMMP would include but not be restricted to the following:

Sr. #	EMMP Elements	End Users
1	Background	All stakeholders – internal and external Community groups Approval or consent authority e.g. EPA Punjab
2	Environmental Management	The management and supervisory staff of M/S Dump Site Zakwan Builders & Developers (Pvt.) Ltd.. EPA Punjab
3	Implementation	The management and supervisory staff of M/S Dump Site Zakwan Builders & Developers (Pvt.) Ltd.. Community groups, EPA Punjab

4	Monitor and review	The management and supervisory staff of M/S Dump Site Zakwan Builders & Developers (Pvt.) Ltd..
---	--------------------	---

7.2 EMMP CONTEXT

Being an environment conscious and law abiding entity, M/S Dump Site Zakwan Builders & Developers (Pvt.) Ltd.. has decided to identify, develop and implement an EMMP that identifies the environmental aspects of their project besides providing them a guideline to tackle any environmental issues that may arise in the future. Under the Punjab Environmental Protection Act, 1997 (Amended, 2012), conducting an IEE/EIA prior to commencement of a project is obligatory. This is further reinforced through the IEE/EIA Rules 2000. A more elaborated guideline for Environmental Report Writing further provides a step by step procedure for drafting of an IEE/EIA report. An Environmental Management and Monitoring Plan have been made a compulsory part of the IEE/EIA report under the same guidelines. It is for this reason that M/S Dump Site Zakwan Builders & Developers (Pvt.) Ltd.. has planned to meet pre-requisite of the Environmental Approval by drafting a meticulously planned EMMP.

7.3 OBJECTIVES OF ENVIRONMENTAL MANAGEMENT PLAN

The objectives underlying the EMMP of M/S Dump Site Zakwan Builders & Developers (Pvt.) Ltd.. are:

- To provide guideline to the management and supervisory staff for conducting their activities in an environmentally responsible manner
- To mitigate potential risks during operational phase of the project
- To coordinate with the responsible approval authorities regarding the environmental efforts
- To identify roles and responsibilities for the implementation of EMMP
- To meet the regulatory obligation put forth by Punjab Environmental Protection Act, 1997 (Amended 2012).

7.4 ENVIRONMENTAL POLICY

M/S Dump Site Zakwan Builders & Developers (Pvt.) Ltd.. strives for environmental reverence which is why it has devised its environmental policy stating vision of the

Municipal Solid Waste Disposal Dump Site by M/s Zakwan Builders & Developers (Pvt.) Ltd.

company towards environmental conservation. Our policy is:

- To provide a quality product yet sustainable and environmental friendly working condition to its employees
- Conserve natural resources through adopting less waste policy
- Energy conservation through promoting environment friendly plant designs
- To provide trainings to all employees to meet our environmental objectives

7.5 MANAGEMENT APPROACH

The overall responsibility for compliance with the environmental management plan rests with the project proponent.

The organizational roles and responsibilities of the key players are summarized below:

Proponent: The project proponent will undertake overall responsibility for compliance with the EMP. Concerned Departments will carry out verification checks to ensure that the contractors are effectively implementing their environmental and social requirements.

Contractors: The contractors will implement the majority of environmental and social mitigation measures. The contractors will carry out field activities as part of the project. The contractors are subject to certain liabilities under the environmental laws of the country, and under its contract with proponent.

7.6 COMPONENTS OF THE EMP

The EMP consists of the following:

- Management plan
- Monitoring Plan
- Communication and documentation
- Institutional capacity
- Environmental training

7.7 INSTITUTIONAL CAPACITY

Following functionaries are involved in the implementation of EMP.

- Project Proponent
- HSE/ Project Manager
- In-Charge Administration
- Supervisor of Project
- Environmental Engineer.

7.8 ENVIRONMENTAL MANAGEMENT AND MONITORING PLAN STRUCTURE AND RESPONSIBILITY

Table 7.2: Roles and Responsibilities

Sr. #	Positions	Significance	Stage	Environmental Responsibilities
1	Proponent / Owner	Critical	Operations	Oversee Environmental Policy and EMMP Serve as primary contact to the regulatory authorities Commit resources to achieve environmental objectives
2	All Employees	Critical	Operation	Attend training and understand their roles in the implementation of EMMP Understand the Environmental Policy / Objectives and act accordingly Participate in the review of EMMP Coordinate with the responsible authorities within the project to report any noncompliance to their Environmental Policy
3	Operational Supervisor	Critical	Operational	Understand the environmental policy of the project Operate in accordance with the environmental policy Ensure reducing solid waste generation Reduce water and energy wastage

				<p>Ensure all machineries /equipment are in good conditions</p> <p>Ensure health and safety of the workers during construction phase</p> <p>Ensure safe transportation of good/materials to and from the project site</p>
4	Maintenance Manager	Critical	Operation	<p>Understand the environmental policy of the project</p> <p>Operate in accordance with the environmental policy</p> <p>Ensure reducing the chances of increased solid waste</p> <p>Reduce water and energy wastage</p> <p>Ensure all machineries /equipment are in good conditions</p> <p>Ensure health and safety of the workers during operational phase</p> <p>Provides health, safety and environmental awareness trainings to the staff</p>
5	Administrative Person Deal with	Critical	Operational	<p>Understand the environmental policy of the project</p> <p>Operate in accordance with the environmental policy</p> <p>Ensure reducing the chances of increased solid waste</p>

	<p>Environment Issues</p>			<p>Reduce water and energy wastage Ensure all machineries /equipment are in good conditions Ensure health and safety of workers during operational phase Receive health, safety and environmental awareness trainings Prepare and maintain accidents/environmental risk records Timely coordination with the responsible authority</p>
--	-------------------------------	--	--	---

7.9 TRAINING SCHEDULES

Training and orientation programs shall be organized by the Environmental Experts, PSC and Management of M/S Dump Site Zakwan Builders & Developers (Pvt.) Ltd.. for the contractors, laborers, and technical/ office staff of the contractors, site engineers of DSC and the relevant staff or building their capacity with regards to principles and procedures of environmental management, pollution abatement measures, public consultation and participation, health and safety measures and implementation of EMMP.

Table7.3: Personnel Training Program/ TA Services

Provided By	Contents	Trainees/Events	Duration
TA consultants/ organizations specializing in Environmental Management and Monitoring	Short seminars and courses on: Environmental Laws and Regulations, daily monitoring and supervision	Seminars for Project Proponent and contractor project staff	3 days
TA consultants/ organizations specializing in Environmental Management and Monitoring	Short seminars and courses on social awareness	Seminars for project staff dealing in social/lands matters.	3 days
TA consultants/ organizations specializing in Occupational, health and safety issues	Short lectures relating to occupational safety and health.	Seminars for contractor's staff	3 days

7.10 ENVIRONMENT MANAGEMENT PLAN

It lists all the mitigation measures identified in the EIA and the associated environmental or social aspect in line during operational phase with the administrative framework involving all the responsible implementing authorities who are required to take the planned actions/measures. It enhances project benefits by reducing its impacts and making it environmental friendly.

7.10.1 ENVIRONMENTAL MANAGEMENT PLAN FOR M/S DUMP SITE ZAKWAN BUILDERS & DEVELOPERS (PVT.) LTD..

M/S Dump Site Zakwan Builders & Developers (Pvt.) Ltd.. believes in sustainable resource management which is why it has developed a comprehensive Environmental Management and Monitoring Plan for its operational phase.

Table 7.4: Environmental Management Plan

Project activities	Type of impact	Potential impacts on environment	Extent / Magnitude	Mitigation Measure	Institutional Responsibility	
					Implementing body	Supervision
PRE-CONSTRUCTION						
Land acquisition and land use	Physical , Social and Aesthetical	Positive use of land but proper planning will be required that is fencing and Signalization is put in place in accordance with best practices.	More	Land is owned by proponent and there is no settlement so no impact will be there. Land will be improved from open land to industrial land.	Contractor	Proponent*
Use of local manpower	Social	Employment Generation	Less / Adjacent area	Local people will be hired for less technical work or non-skilled work	Contractor	Proponent*

Site establishment	Physical	Site cleaning and leveling of the waste	Less / Adjacent area	All the waste that has been created during this phase should be transported by the contractor or a company that has been specifically contracted to send the waste in the authorized sanitary landfill.	Contractor	Proponent*
Site Housekeeping	Physical, Social and Aesthetical	Construction activities shall avoid causing unnecessary disruption and nuisance to adjacent landowners and the public as a whole	Less / Adjacent area	The site where the construction is taking place should be organized using the standard schemes for organizing construction sites, in order identifying: <ul style="list-style-type: none"> • Equipment used in the construction; • Dynamics of the construction works; • Safety conditions for the workers hired by the contractor and the conditions of public safety, 	Contractor	Proponent*
Emergency Response	Physical /Social	Disasters such as earthquakes, flooding and other manmade disasters such as fires may occur	Less/ Within area	Complete equipment control system, fire exits and secured access system supplemented with close circuit surveillance equipment/alarms.	Contractor	Proponent*
CONSTRUCTION PHASE						
Civil works	Physical,	Soil Erosion,	More/	Minimization:	Contractor	Proponent*

	Social, Biological Aesthetical	Emissions, Water Contamination, Noise &Vibration, Wildlife affected, Employment, Health &Safety of Workers	Adjacent area	Dust emission from soil piles and aggregate storage stockpiles will be reduced by keeping the material moist by sprinkling of water at appropriate frequency Avoidance: Covering the pile, for example with tarpaulin or thick plastic sheets, to prevent emission. Noise control measures will be implemented Use of water only from designated wells Wildlife protection rules will be included in the Camp Rules Off-road driving will be minimized in order to avoid accidental killing of fauna.		
Waste	Physical & Aesthetical	Solid waste generation	More/ Adjacent area	Dedicated waste segregation units will be provided. Recycling items will be provided to recycling contractors.	Contractor	Proponent*
Movement and fueling of vehicles	Physical & Aesthetical	Soil &Water Contamination due to Fuel Leakages & Spillage, Emissions, Noise &Vibration	Moderate/ at the site	Avoidance: Periodic maintenance and inspection of vehicles Vehicles with leaks will not be operated. Vehicles should not be washed or serviced in the field. No vehicle-related waste, such as oils, filters, old tires or parts, will be left in the field All vehicles will be maintained in good working condition All vehicles will have properly functioning silencers (mufflers).	Contractor	Proponent*

Transportation of construction material	Bio-physical	Dust and Particulate Emissions, Noise Generation, Safety and Health Effects, slow movement of vehicles	Moderate/ Adjacent area	<p>Minimization: Excessive use of horns will be avoided PPE's will be provided to workers</p> <p>Avoidance: Covering of transporting material trucks Nighttime driving of project vehicles will be limited where possible Low speed limit will be maintained on the section of the access road that is adjacent to the community and site. The fence surrounding the site will be put in on during the construction to prevent access to the construction site</p>	Contractor	Proponent*
Construction of campsites	Biological and physical	Damage to Topsoil, Drawn of Water from Local Resources	Moderate/at the site	<p>Photographs will be taken to record the conditions before setting-up camp. Camps will not be established within a 300-m radius of any water body. Camps will be established in the existing clearings. Camps will be kept as small as possible. Water will only be taken from designated wells.</p>	Contractor	Proponent*
Instrument installation	Physical & Social	Noise & Vibration, Spillage & Leakages, Health & Safety	Moderate/ adjacent area	<p>Reduction: Use of PPE's</p> <p>Avoidance: Proper maintenance and inspection of equipment's and machinery. Warning signs will be provided to assure</p>	Contractor	Proponent*

				safety.		
Laying of Transmission lines	Physical	Effects on scenic beauty, Disturbance to birds, noise, safety	More/ adjacent area	Reduction: Planting vegetative screens to block views of the transmission lines Provision of proper safety measures and tools Signs for bird's protection will be provided	Contractor	Proponent*
Use of local water resources	Physical, Social & Biological	disturbance to local community	Less/ adjacent area	Avoidance: Initiation of water conservation program Reduction: Where possible, water should be recycled	Design engineer & Contractor	Proponent*
OPERATIONAL PHASE						
Collection of waste	Physical	Air quality, Odor, destroy aesthetic beauty	Local	Segregation of waste will be done prior the collection. .	Contractor	Proponent*
Transportation of wastes	Physical	Traffic management	Local	Waste will be transported during daytime when there will be less traffic load. Good quality fuel (EURO II) will be used in transportation vehicles for environmental safety.	Contractor	Proponent*
Storage of waste	Physical	Air quality/ soil and water quality	local	. Each type of waste will be stored separately to avoid mixing of waste. Properly tiled floor will be provided to avoid	Contractor	Proponent*

				accidental seepage of liquids from the waste. The storage room will be kept cleaned to avoid rodents and scavengers in the room.		
Odor control/ reduce concentration of pollutants	Physical	Air quality	Severe/ local	Dry materials shall be kept dump or covered at all time, Install gadgets to intercept the particulate matter as well as controlling gaseous emissions.	Contractor	Proponent*
Greening the compound and landscape	Physical	Vegetation cover	Less/ adjacent area	Introduction of vegetation (trees, shrubs and grass) on open spaces within and around the site. Indigenous species would be preferred.	Contractor	Proponent*
Social acceptability and co-existence	Social	Enhance socially acceptable procedures/ Public satisfaction	Less/ adjacent area	Involve more independent interested parties (waste collectors) in establishing options for waste recycling.	Contractor	Proponent*
Heavy equipment operation	physical	Particulate Matter, Emission of GHG, Noise,	Moderate/ Local	Avoidance: Noise control plans No machinery will be left unattended, particularly in running	Contractor	Proponent*

		Vibration		<p>condition</p> <p>All vehicles, generators and other equipment used during the construction and operation will be tuned and maintained in good working condition in order to minimize emission of pollutants</p> <p>Reducing equipment noise at source by proper design, maintenance and repair of construction machinery and equipment,</p> <p>Minimizing noise from vehicles and power generators by use of proper silencers and mufflers</p> <p>Reduction: PPE's provision</p>		
Solid Waste Generation/	Physical, Biological, Social	Soil Contamination, effecting GW Quality, Emission of GHG, Biological, Particulate Matter, Health, Economy, Welfare	Severe/ local and global	<p>Separation of recyclable material</p> <p>Training will be provided to personnel for identification, segregation, and management of waste.</p> <p>Provision of Separate waste bins</p> <p>The solid waste generated in house will be treated in house through dumping.</p>	Contractor	Proponent*

				no leakage on site with minimal risk of pollution of groundwater and soil. • Final disposal of solid waste from proposed dump facility .		
Spillage from vehicles and machinery	Physical, Biological	Soil Contamination, Effecting GW Quality, Emission of GHG,	Moderate/local	Avoidance: On-site maintenance of construction vehicles and equipment will be avoided as far as possible Emergency plan for spill management will be prepared and inducted to the staff for any incident of spill	Contractor	Proponent*
Handling of wastewater	physical, biological, social	Soil contamination, effect on GW quality, GHG emission, effect on vegetation,	severe/ local and global	Reduction: Provision of septic tank for domestic waste water. Avoidance: Handling and storage of fuels and lubricants in areas of impervious floors	contractor	Proponent*

		fisheries, health, economy, welfare				
Disaster Planning	physical, social	reduction of biodiversity, community grievance, economy, welfare	severe/local	Avoidance: Proper disaster planning will be done to meet any emergency situation arising due to fire, explosion, sudden leakage of gas etc. Firefighting equipment and other safety appliances will be kept ready for use during disaster/emergency situation including natural calamities like earthquake/flood	contractor	Proponent*
Fuel Management	Physical, Biological	Spillage, Soil Contamination, Degradation of Water quality	Severe/local	Avoidance: Proper electrical grounding will be provided for loading and off-loading equipment. Smoking should not be permitted within 10 m of the fuel storage area. Fuel storage areas should be clearly marked to ensure that moving vehicles does not damage them.	contractor	Proponent*
waste management	Physical	Safety hazard, spills		Avoidance: Labeling will be placed on all storage vessels/containers as appropriate to national and international standards. The labeling will clearly identify the stored materials Storage areas for fuels and liquid chemicals will be designed with secondary containment to prevent spills and contamination of soil and groundwater	Contractor	Proponent*

7.11 ENVIRONMENTAL MONITORING PLAN

Environmental monitoring is being followed and will be strictly undertaken in accordance with the requirements of the environmental authority (EPA, Punjab) to ensure compliance to the Punjab Environmental Quality Standards (PEQS) as and when required. Proponent has decided to spend 1.1 million PKR annually for sake of Environmental Budget.

Environmental monitoring is including parameters that are mentioned in the Environmental Approval accorded by the Environmental Protection Agency, Punjab for getting approval under section 12.

Environmental monitoring is a vital component of the Environmental Management Plan. It is the mechanism through which the effectiveness of the environmental management Plan in protecting the environment is measured. The feedback provided by the environmental monitoring is instrumental in identifying any problem or lapse in the system under implementation and planning corrective actions. The main objectives of the environmental monitoring are:

- To provide a mechanism to determine whether the project construction contractors are carrying out the project in conformity with the EMP.
- To identify areas where the impacts of the project are exceeding the criteria of significance and, therefore, require corrective actions.
- To document the actual project impacts on physical, biological, and socio-economic receptors, quantitatively where possible, in order to design better and more effective mitigation measures.

Following environmental record should be maintained:

- Periodic inspection reports of the site
- Audit reports
- Incident record of all moderate and major spills and other incidents and accidents.

The record will include:

- Location of spill or battery limit of the accident
- Estimated quantity or the amount of injury (as may be reported in LTI or LWI)
- Spilled material or nature of injury or loss (temporary or permanent)
- Restoration measures

- Photographs
- Description of any damage to vegetation, water resource, or community asset.
- Corrective measures taken, if any
- Waste Tracking Register that will hold records of waste generated during the construction period. This will include quantities of waste disposed, recycled, or reused.
- Records of water consumption with use wise breakdown
- Survey reports, in particular, the following:
 - Vehicle and equipment noise.
 - Ambient noise survey reports.
 - Ambient level of PM
 - Vendor data—all vendors disturbed by the project and compensation paid
 - Public infrastructure: Record of all damages and repair work undertaken.
 - Employment
 - Total number of unskilled, semi-skilled, and skilled jobs offered during Construction.
 - Name and domicile of the employed staff.
 - Project and Community Interface
 - Record of community complains and the measures taken to address them.
 - Number of meetings held in various communities and data of persons who attended.

a) Construction phase

Table 7.5: Environmental Monitoring Plan						
Components	Objective of Monitoring	Parameter to be Monitored	Measurement	Frequency	Location	Responsibility
Noise Levels	To determine the effectiveness of the noise abatement measures on the sound level	Noise level on the site and adjacent area on dB(A) scale	Noise level reading will be taken	Twice a year	At least three locations on the unit boundary	Consultant / HSE
Workers safety	To check and evaluate the effectiveness of the workers' safety plan	Injuries and accidents	Recording injuries	daily	Onsite	HSE/contractor

Water conservation	To determine the effectiveness of the Water	leakages, spills and wastages	Visual inspection and record	On monthly basis	at all points of use	Environmental officer/manager
--------------------	---	-------------------------------	------------------------------	------------------	----------------------	-------------------------------

	Conservation Techniques in Practice		tracking			
Dust emissions	To confirm the ambient air Quality	Air quality at different points	Readings will be taken	Twice a year	At least three points on mine and site	Consultant / Environmental manager
Property value	Access to public and private properties	Monitoring impact of project on business in the project area	Using questionnaire s	After 2-3 months	2-3 surrounding area	Consultant / Environmental manager

b) Operation Phase

Monitoring Category	Type of Monitoring	Monitoring Responsibility
Operation and Maintenance System		
Noise and air emissions due to generators and vehicles	Monitor proper maintenance of the equipments	Proponent
Solid waste segregation, recycling and final disposal	Monitor adequacy of measures undertaken to collect and dispose of solid waste	Proponent

Sewage and wastewater disposal	Monitor disposal of wastewater according to the proposed mitigation	Proponent
Environment and Landscape		
On site wastage material's minimization	Monitor waste minimization activities	Proponent
Creation of landscape by tree planting, appropriated to local conditions	Monitor and implement site restoration and landscaping	Proponent

7.12 EQUIPMENT MAINTENANCE DETAIL

All work equipment will be maintained in an efficient state, in efficient order and in good repair. All machinery has a maintenance log, the log is kept up to date; and that maintenance operations on work equipment are carried out safely. The detail of equipment maintenance log is given in Annexure.

7.13 ENVIRONMENTAL BUDGET

The total cost for the environmental management is estimated as 01 million PKR both during construction and its regular operation. The estimations are as followings;

Table - 7.6: Environment Management Cost

Sr. #	EMP Parameters	Unit Cost	Before Construction		During Construction		After Construction		Total (m PKR)
			Times	Cost	Times	Cost	Times	Cost	
1	Environmental Monitoring	0.050	0	0	1	0.050	2	0.050	0.1
2	Social Cost (meeting, visit, tour etc.)	0.01	1	0.01	0	0.01	0	0.01	0.01
3	Environmental Training	0.05	1	0.05	0	0	1	0.05	0.1
4	Tree Plantation Plan	0.0005	0	0	0	0	1000	0.0005	0.5
5	Environmental reporting & review	0.3	1	0.3	0	0.3	0	0	0.3
Total									1.01
Contingencies (10%)									0.101
Grand Total									1.1

CHAPTER VIII

CONCLUSION AND RECOMMENDATIONS

The EMMP will guide the environmentally-sound construction of the project and ensure efficient lines of communication between the DSC (Engineer), contractors and EE. The EMMP will

- Ensure that the activities are undertaken in a responsible non-detrimental manner;
- Provide a pro-active, feasible and practical working tool to enable them and monitoring of environmental performance on site;
- Guide and control the implementation of findings and recommendations of the environmental assessment conducted for the project;
- Detail specifications deemed necessary to assist in mitigating the environmental impact of the project; and
- Ensure that safety recommendations are complied with.

8.1 CONCLUSION

The following are the main conclusions drawn from the study:

- The project adverse impacts are minimal than that of the benefits, which will be attained because of the implementation of the project.
- The possible mitigation measures to minimize/ or reduce the environmental and social impacts are listed in the EMMP.
- No endangered or threatened species found in the project area.
- The project does not involve any land acquisition, as the requisite land is already owned by the project proponent.
- There are no nearby residence communities. The nearest residential area is about 4 km away from the project site. The residents have no issue with the implementation of the project rather it is highly supported project because of present infrastructural development situation in the country.
- An EMMP has been developed to address the environmental issues associated with this project.

8.2 RECOMMENDATIONS

Based on the potential impacts, the project falls in the category of high beneficial and low adverse. The project potential impacts will be mitigated by adopting all suggested technical/ engineering best practices and measures.

The following are the major recommendations:

- The EMMP developed needs to be fully implemented during the both construction and operation stage of the project.
- Environmental monitoring to ensure the proper implementation of EMMP will be required
- A copy of the EMMP must be kept onsite during the construction/ rehabilitation period at all times. The EMMP will be made binding on all contractors operating on the site and will be included within the Contractual Clauses. Non-compliance with, or any deviation from, the conditions set out in this document constitutes a failure in compliance.
- The potential adverse impacts that are associated with design, construction, and operation can be mitigated to standard levels without difficulty through proper engineering design and the incorporation or application of recommended mitigation measures and procedures.
- All types of storage including fuels should be cemented to prevent the percolation of contaminants.
- The rainwater collection pond should be kept covered to avoid spread of any water borne disease.

In addition to above, there would be temporary impact of dust pollution during construction and operation stage, so sprinkling of water on regular basis especially during dry climatic conditions should be done in order to limit pollution from dust and other windblown materials.

An adequate number of trees will need to be planted at project site to increase the aesthetic value of the project area.

Proper technical design to minimize accidents and chances of possible failure of the structure.

All parameters especially noise, ambient air, waste water should remain within the permissible limit of PEQS.