EXECUTIVE SUMMARY

The pharmaceutical industry discovers, develops, produces, and markets drugs or pharmaceutical drugs for use as medications to be administered (or self-administered) to patients, with the aim to cure them, vaccinate them, or alleviate the symptoms. Pharmaceutical companies may deal in generic or brand medications and medical devices. They are subject to a variety of laws and regulations that govern the patenting, testing, safety, efficacy and marketing of drugs. In this regard, M/S Arsons Pharmaceutical Industries. is aiming to construct a pharmaceutical products manufacturing plant at Moza Nehla Tehsil Raiwind Near Sunder Industrial Estate, District, Lahore. Proposed project involves production facilities of pharmaceuticals products which are medical devices. Production and other facilities will be added, as described below.

- ⇨ Medical devices Manufacturing Facility
- ⇨ Quality Assurance / Quality Control Department:
- ⇨ Research & Development Department:
- ⇨ Engineering Department:
- ⇨ Water System:
- ⇨ Air Handling System:
- ⇨ Ware House:
- ⇨ Personnel:
- ⇨ Standard Operating Procedures:
- ⇨ Effluent Treatment:

M/s Arsons Pharmaceutical Industries at Moza Nehla Tehsil Raiwind Near Sunder Industrial Estate, District, Lahore are planning to construct a pharmaceutical unit under the title of Arsons Pharmaceutical Industries (PVT) Ltd. The project site/unit is situated at a self-developed industrial land.

According to section-12 of PEPA-1997 (Amended, 2012) Environmental Approval/NOC is a mandatory provision.

The said Environmental Impact Assessment Study will cover the sections-12 for Environmental Approval Punjab Environmental Protection Act, Amended 2012. Furthermore, the study provides relevant information, as required under the officially

approved format, to help the decision makers i.e. EPA Punjab before issuing the Environmental Approval.

The main objectives of this Environmental Impact Assessment (EIA) Report are to identify the baseline environmental, biophysical and socio-economic conditions, to examine project alternatives including alternate sites, and to study the potential impacts along with formulation of suitable mitigation measures for an environment friendly implementation of the proposed project site and around the project area.

Table 1: Salient Features of the Project

1.	**Project Title**	**Arsons Pharmaceutical Industries (PVT) Ltd.**
2.	Project Location	Moza Nehla Tehsil Raiwind Near Sunder Industrial Estate, District, Lahore.
3.	Proponent	Muhammad Arshad Javed S/O Mukhtar Ahmad ADDRESS: House no. 135-F, Sector EME, DHA, Multan Road, Lahore.
4.	Consultant	Joint Venture of Central Environmental Services (Pvt) Ltd. & EnvironTech Consultants (Pvt) Ltd.
5.	Total Area	17 Kanal 7 Marla
6.	Total covered area	45,454 SFT
7.	Total open area	49,016 SFT
8.	Capacity of Project	**5,000** BOXES/DAY
9.	Location of project	31°16'10.9"N 74°09'48.0"E
10.	Nature of Area	self-developed industrial
11.	Present status of Land Use	Open/Vacant plot
12.	Land use in the surroundings of project site. North South East West	The project is located in self-developed industrial. The surroundings are: Open/Vacant land Road Open/Vacant Land Open/Vacant Land

13.	Cost of Project	PKR 67 million PKR
14.	Raw material	Liquid Solvent, Solids for Reaction and Gases
15.	Product	Pharmaceutical Products (Medical Devices)
16.	Purpose of proposed project	Manufacturing of pharmaceutical products
17.	Nearby emergency services i.e. Hospital, police station, rescue, fire brigade etc.	Punjab Social Security (3 Km) Rescue 1122 (15.4 Km). Industrial Colony Police Station (3.3 Km)
18.	Tree Planation	At Designated Green Areas
19.	Water Source	Ground Water
20.	Status of Project	Open/Vacant Land
21.	Source of Power	WAPDA (LESCO)

1.0 Project Description

The said project is basically a part of healthcare sector that deals with medications, it will be a Medical devices manufacturing unit namely Arsons Pharmaceutical Industries (PVT) Ltd. located at Moza Nehla Tehsil Raiwind Near Sunder Industrial Estate, District, Lahore, where First Aid Bandages will be Produced.

The salient features of proposed unit are as under:

- Imported latest art of technology plant/machinery which incorporates the requirements of PEQS rather the plant based on International Standards which are more stringent as compared to standards of Punjab.
- Medical Devices manufacturing Plant
- Quality Assurance/Quality Control Department
- Research & Development Department
- Engineering Department
- Water System

- Air Handling System
- Ware House
- Standard Operating Procedure
- Central fire hydrant system, fire alarm systems, Smoke detectors, fire extinguishers are placed.
- Emergency assembling points are mentioned in the factory and the workers are trained to cope with any emergency situation.
- Ornamental plants/trees are grown up, grassy lawns have been developed at open place.
- The stand by generators will be latest art of technology and well-tuned within time. Silencer and sound proof canopies are also installed.

2.0 Impacts and Recommended Mitigation Measures

In order to identify all the impacts associated with the project during construction and operational activity with potential to cause adverse environmental impacts, a thorough review has been conducted. Although, there is very low chances of any adverse impact occurrence on the surrounding environment. However, in case of impact arises from the project activity possible necessary measures will be adopted to control the same. Overall the project has positive social impacts specifically on the local population and generally contributes in Pakistan's GDP. The project may have some adverse environmental impacts of minor to moderate magnitude which will be controlled through mitigation measures proposed in Environmental Management and Monitoring Plan (EMMP). Moreover, there is no tree present on site, few patches of bushes and grass are present, and restoration and reclamation will be carried out by the plantation of native species in specified green areas. Environmental impacts have been identified and mitigation measures are recommended within the Project Area of Influence. The major impacts on physical, biological and social environments are described as under:

Table 2: Impact Summary

Environmental Parameters	Impact Assessment during Different Phases	
	Construction	Operational

A: Physical		
Land Resources		
Soil Erosion and Contamination	-2p	0
Transportation	-1t	-1t
Solid Waste and By-Products	-2t	-2p
Land Use	-2p	NA
Air Resources		
Noise Pollution	-1t	-1t
Air Emission	-1t	-1t
Dust	-1t	-1t
Odor	NA	-2t
Water Resources		
Ground Water	-1p	-1p
Surface Water	NA	NA
Wastewater	-1p	-2p
B: Ecological		
Flora		
Tree Cutting	-1p	+1p
Fauna		
Terrestrial Fauna	-1p	+1p

C: Socio-Economic		
Employment Opportunities	+1t	+1p
Land Value Appreciation	+1t	+2t
D: Hazards		
Biological Hazards	NA	NA
Physical Hazards	-1t	-1p
Chemical Hazards	0	-1p
Health and Safety	-1t	-1p
Legends: 1= Low; 2= Medium; 3= High; 4= Extremely High; NA= Not Applicable; t= Temporary; p= Permanent; app= Applicable; 0= Negligible		

3.0 Environmental and Social Monitoring Plan

Environmental Management and Monitoring Plan (EMMP) were developed for effective implementation of the recommended mitigation measures. The EMMP includes check and balance to control and minimize the identified impacts and monitoring programs to oversee residual impacts, if any, during the operational phase. The EMMP describes procedures to be followed throughout the construction and operation of the project. It also identifies the roles and responsibilities of all concerned personnel, including the persons reporting during the different project phases. Mitigations for physical, biological and socio-economic parameters will be measured to determine compliance with standards established in EMMP. The Monitoring Plan will record the inputs provided by various participants in the environmental and social management process. It will also check whether the prescribed national and provincial guidelines and plans are being followed and that the required mitigation measures and activities are being accomplished in time.

4.0 Monitoring Plans

During operational phase, monitoring is required to be carried out at least once in a month during rainy season to check the soil contamination and surface water

level/condition. Moreover, periodic monitoring should also be carried out regarding ambient air quality, noise and dust level and worker safety. A detailed site monitoring plan has been developed and given in Chapter-7 of this EIA Report.

5.0 Conclusion

The findings of EIA Report showed that although the pharmaceutical manufacturing unit is expected to have significant minor to moderate negative impacts on the environment during the construction and operational phases, but the severity of these adverse impacts can be reduced significantly by adopting EMMP with true spirit as proposed in the Chapter 7 of this EIA Report. The impacts were assessed by frequent site visits, studying related projects and by reviewing the documents. Generally, the project is planned to follow efficient environmental management systems. Specific environmental and social benefits have been mentioned below which depend on the proper application of mitigation measures suggested in EMMP and best engineering practices.

6.0 Recommendations

The intensity and severity of impacts occurred due to the processing varies with change in the nature and magnitude of the project as well as depends upon the baseline environmental conditions of the area. The mitigation measures will require constant information flow and consultation with the stakeholders to ensure the least adverse social-economic impact to outweigh the “no project development” scenario.

- The adverse environmental impacts can be reduced significantly by adopting best management and monitoring practices as well as by implementation EMMP with true spirit
- Proper PPEs including gloves, face masks, head gear etc. will be provided
- No compromise on public health and environment should be allowed
- Waste minimization practices should be introduced to workers by conducting lectures on spot to aware the workers about the long-term benefits of the same in lieu of surrounding environment
- A proper tree plantation plan should also be developed in order to make the process environment friendly
- Small domestic waste storage bins should be placed at different locations for proper collection and disposal of the solid waste

- It is recommended that the Proponent should obtain an Environmental Approval (NOC) from the Punjab-EPA before proceeding further.

Contents

EXECUTIVE SUMMARY 1

1. INTRODUCTION 18

1.1 Project Background 18

1.2 Project Nature and Size 18

1.2 Project Location 19

1.4 Regulatory Compliance 20

1.5 The Proponent 21

1.6 Scope of Project 21

1.7 Details of Consultant 22

1.8 Purpose of Report 24

2. SCREENING AND SCOPING 25

2.1 Screening/Type and Category of Project 25

2.2 Scoping: 25

2.3 Alternatives 27

Site Alternatives 27

Project Alternatives. 27

Environmental Alternatives: 28

Economic Alternatives: 28

3. DESCRIPTION OF PROJECT 29

3.1 Objectives of Project 29

3.2 Location and Layout of Project 29

3.3 Land Use on Site: 30

3.4 Road Access 30

3.5 Vegetative Features 30

3.6 Amenities 31

3.6.1 Electricity 31

3.6.2 Ground Water Resource 31
3.7 Management Plans 31
3.7.1 Air Emissions 31
3.7.2 Wastewater Management and Disposal 33
3.7.3 Waste Management 34
3.8 Staff/Manpower 35
3.9 Emergency Preparedness 35
3.9.1 Safety Trainings 36
3.9.2 36
3.9.3 36
3.10 Cost and Magnitude of Operation 36
3.11 Land ownership Documents 37
3.12 Schedule of implementation 37
3.13 Process Description 38
3.13.1 Basic Raw Materials Required by the Proposed Unit 38
3.14 Finished Products 38
3.14.1 Manufacturing Process for Arsoplast Banaged, FastoPlast Bandage, Fabric Bandage, Handy Plast bandage, Hi-Plast Bandage, Plastic Bandage and kid-Plast Bandage: 40
3.14.2 Manufacturing Process for Belladerma Plaster Bandage, Lion Plaster Bandage, Belladona Plaster Bandage and Lumbo Bella Plaster Bandages: 42
3.14.3 Manufacturing Process for Arsotulle Bandage, Arsotin Bandage, Care Guaze Bandage, Care Eye Pad and Sofray Tulle: 43
3.14.4 Manufacturing Process for MediSwab 44
3.14.5 Manufacturing Process for Zinco Adhesive Bandage and Adhesive Plaster 45
3.15 Relocation and Rehabilitation Plan 46
4. DESCRIPTION OF THE ENVIRONMENT 47

4.1 Methodology 47
4.1.1 Data Collection 47
4.1.2 Social Survey 47
4.1.3 Sampling Design 48
4.1.4 Questionnaires 48
4.1.5 Data Editing and Analysis 48
4.2 Review of Legal and Administrative Framework 48
4.3 Baseline Conditions 48
4.4 Physical Environment 49
4.4.1 Topography and soil 49
4.4.2 Climate 52
4.4.3 Hydrology 56
4.4.4 Groundwater 57
4.4.5 Geology / seismology 57
4.5 Description of the biological environment 59
4.5.1 Flora 59
4.5.2 Fauna 60
4.6 Socioeconomic Resources and Quality of life values 60
4.6.1 Population and communities 60
4.6.2 Infrastructure 61
4.6.3 Educational institutions 61
4.6.4 Transportation 61
4.6.5 Power sources and transmission 61
4.6.6 Agricultural and mineral development: 62
4.6.7 Public health 62
4.6.8 Archaeological and cultural sites 62
4.6.9 Gender analysis 62

4.8 Quality of Life Values 62
4.8.1 Occupation of Respondents 63
4.8.2 Personal Income 63
4.8.4 Facilities Available 64
4.8.5 Literacy Rate 64
4.8.6 Common Diseases 64
4.8.7 Favor for the Project 64
4.8.7 Community Issues 66
4.9 Lab Reports of Environmental Analysis 66
4.10 Suitability of Site: 66
5. PUBLIC CONSULTATION AND INFORMATION DISCLOSURE 67
5.1 Proponent's Environment Management Team 67
5.2 The Responsible Authority 69
5.3 Objectives of Consultation 70
5.4 Identification of Stakeholders 71
5.4.1 Direct Stakeholders 71
5.4.2 Indirect Stakeholders 71
5.4.3 Other Departments and Agencies 71
5.5 Public Disclosure 72
5.6 Consultation Process 72
5.7 Environmental Practitioners and Experts 73
5.8 Affected and Wider Community 73
5.8.1 Views, Concerns and Suggestions of Various Stakeholders 74
5.8.2 Addressing Public Concerns 75
5.9 Acceptance Level of the Project 75
6. POTENTIAL ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES .. 76
6.1 General 76

6.1.1 What is the problem? 76
6.1.2 When problem will occur and when it should be addressed? 77
6.1.3 Where problem should be addressed? 77
6.1.4 How the problem should be addressed? 77
6.2 Ways of Achieving Mitigation Measures? 77
6.2.1 Changing in Planning Design 77
6.2.2 Improved Management and Monitoring Practices 77
6.2.3 Replacement/Relocation/Rehabilitation 78
6.3 Impact Assessment Methodology 78
6.3.1 Screening of Potential Impacts 78
6.3.2 Identification of Mitigation Measures 78
6.4 Impact Evaluation 79
6.4.1 Methodology for Impact Evaluation 79
6.5 Impacts Associated with Project Location 84
6.6 Design Related Impacts 85
6.6.1 Changes in Land value 85
6.6.2 Seismic Hazard 85
6.6.3 Emergency response 86
6.7 Impacts During Construction Stage 86
6.7.1 Change in land use 86
6.7.2 Impacts on Topography 86
6.7.3 Impacts on Soils 87
6.7.4 Impacts on Surface and Ground water 87
6.7.5 Impacts on Air Quality 87
6.7.6 Water Consumption 87
6.7.7 Health and Safety of Workers 88
6.7.8 Impacts on flora 88

6.7.9 Impacts on Fauna 89
6.7.10 Change of Land Appearance/layout 89
6.7.11 Employment Generation 89
6.8 IMPACTS DURING OPERATIONAL STAGE 89
6.8.1 Impacts on Climate 89
6.8.2 Employment Generation 90
6.8.3 Air Quality 90
6.8.4 Vapor/Fumes in Production Hall 91
6.8.5 Water Consumption 91
6.8.6 Wastewater Generation 91
6.8.7 Solvent Liquid Waste Generation 91
6.8.8 Solid Waste Generation 92
6.8.9 Health and Safety of Workers 92
6.8.10 Emergency Response 93
6.9 POTENTIAL ENVIRONMENTAL ENHANCEMENT MEASURES 94
6.9.1 Tree Plantation 94
6.9.2 Facility Design 94
6.9.3 Social Enhancement Measures 94
7. ENVIRONMENTAL MANAGEMENT AND MONITORING PLANS 96
7.1 Objectives 96
7.2 Management Approach 97
7.2.1 Proponent 97
7.2.2 Contractors 97
7.3 Components of EMMP 97
7.3.1 Remedial and Mitigation Measures 97
7.4 Environmental Management and Monitoring Framework 97
7.4.1 Institutional Arrangements and Responsibilities 108

7.4.2 Proposed Monitoring Program to Assess Performance or Output of EMP 110

7.5 Proposed EMP Reporting and Reviewing Procedures 135

7.5.1 Meetings 135

7.5.2 Changes-Record Register 135

7.6 Impacts and their Mitigation Summary 135

7.7 Equipment Maintenance Details 137

7.8 Environmental Budget 137

8. CONCLUSION AND RECOMMENDATIONS 139

8.1 Merits and Demerits 139

8.2 Recommendations 140

LIST OF TABLES

Table 1: Salient Features of the Project 2
Table 2: Impact Summary 4
Table 3: Details of Proponent 21
Table 4: Consultant Details 22
Table 5: List of Experts 23
Table 6: Vegetative Features of the Project Area 30
Table 7: Specification of Cyclone 32
Table 8: Details of the Officers 35
Table 9: Breakup of Project Cost 36
Table 10: Concerns and Solutions 65
Table 11: Impact Screening Checklist 81
Table 12: Impact Evaluation Matrix 83
Table 13: Environmental Management Plan 99
Table 14: Roles and Responsibilities 108
Table 15: Environmental Monitoring and Management Plan 112
Table 16: Impacts Summary of Pharmaceutical Industry Processing 135
Table 17: Schedule for Implementation of Environmental Budget 137

LIST OF FIGURES

Figure 1: Project Site 20
Figure 2: Road Access Map 30
Figure 3: Cyclone for Air Emission Control 32
Figure 4: Design of Cyclone 33
Figure 5: Design for Septic Tank 34
Figure 6: Process Flow Diagram for Arsoplast Bandage 42
Figure 7: Process flow diagram for Belladerma Plaster Bandage 43
Figure 8: Process Flow for ArsoTulle Bandage 44
Figure 9: Manufacturing Process for Medi Swabs 45
Figure 10: Topography of District Lahore 50
Figure 11: Average temperatures and precipitation 52
Figure 12: Maximum Temperature of Lahore 53
Figure 13: Cloudy, sunny, and precipitation days 53
Figure 14: Average Precipitation of Lahore 54
Figure 15: Average Humidity of Lahore Region 54
Figure 16: Average and maximum Wind Speed of Lahore Region 55
Figure 17: Wind Rose Diagram of Lahore 55
Figure 18: Seismic Zone of Pakistan (Geological Survey of Pakistan) 59
Figure 19: Occupation of Respondents 63
Figure 20: Personal Income 64
Figure 21: Impact Assessment Hierarchy 79

1. INTRODUCTION

1.1 Project Background

The pharmaceutical industry comprises of companies involved in the research and development, manufacturing and supply, and commercialization of new therapeutic products working to bring the right treatment to the right patient at the right time. The pharmaceutical industry plays a significant role in developing medications and vaccines to reduce the incidence of diseases, to treat diseases and enhance the quality of life of people. The industry's main contribution is engaging in technological advancements through innovative research to meet the complex healthcare demands of populations. The global market for pharmaceuticals is expected to grow at an annual rate of 4.9% to $1.3 trillion by 2020. The U.S pharma market is expected to grow to $320 billion by 2020. The Japan market, the third largest pharmaceutical market, has a forecasted growth of 3% while the U.S has an expected growth rate of 5.6%.

The benefits of using oral therapies is influencing pharmaceutical companies to develop new and improved oral therapies to support patients who need accuracy of dose, convenience and ease of compliance to medication regimen. The demand is also due to increases in the incidence of chronic diseases and technological advancements. Novel technologies are being developed to deliver drugs via an oral route. Freedonia's recent study showed that drug delivery products in the U.S is projected to reach $251 billion by 2019. Emerging markets in the industry include Asia and Latin America. Pharmaceutical sales are forecasted to increase at double digital rates by these new markets.

Pharmaceutical companies may deal in generic or brand medications and medical devices. They are subject to a variety of laws and regulations that govern the patenting, testing, safety, efficacy and marketing of drugs. In this regard, M/S Arsons Pharmaceutical Industries (PVT) Ltd. is aiming to construct a pharmaceutical manufacturing plant at Moza Nehla Tehsil Raiwind Near Sunder Industrial Estate, District, Lahore.

1.2 Project Nature and Size

The proposed project will involve the manufacturing of the quality pharmaceuticals products. They further sub categorized in Medical Devices like first aid bandages. Proposed project will be constructed on an area of 17 Kanal 07 Marla. Total capacity

of the plant will be 5000 Boxes/day. The products which will being produced by the plant are as follows.

Sr. No	Product Name	Generic
1.	Belladerma Plaster Bandage	Capsicum Powder
2.	Lion Plaster Bandage	Belladonna Powder/ Capsicum Powder
3.	Belladonna Plaster Bandage	Belladonna Powder
4.	Arsoplast Bandage	Acrilavine Pad
5.	FastoPlast Bandage	Acrilavine Pad
6.	Fabric Banadage	Arilavine Pad
7.	Handy Plast Bandage	White Pad
8.	Hi-Plast Bandage	Acrilavine Pad
9.	Plastic Bandage	Acrilavine Pad
10.	Kid-Plast Bandage	Acrilavine Pad
11.	Arsotin Bandage	Farmycetin Sulphate…. 1%
12.	Arso-Tulle Bandage	Chlorhexidine acete 0.5%
13.	Care Guaze Bandage	Fabric Plain Weave
14.	Care Eye Pad Bandage	Absorbent Tissue
15.	Zinco Adhesive Bandage	Zin Oxide…10% B.P.
16.	Adhesive Plaster	Zin Oxide …10% B.P.
17.	MediSwabs	IPA 70 %
18.	Arsopore Adhesive Bandage	Adhesive Mass
19.	Lumbo Bella Plaster Bandages	Belladonna Powder… 0.33%
20.	Sofray Tulle	Farmycetin Suplhate …1%
21.	Multipore Tap	Adhesive Mass
22.	Fixopore (Stretchable Fixation)	Adhesive Mass

1.2 Project Location

The proposed location for the installation of proposed project of Arsons Pharmaceutical Industries (PVT) Ltd. is at Moza Nehla Tehsil Raiwind Near Sunder Industrial Estate, District, Lahore. The geographical location of the proposed area is 31°16'10.9"N 74°09'48.0"E.

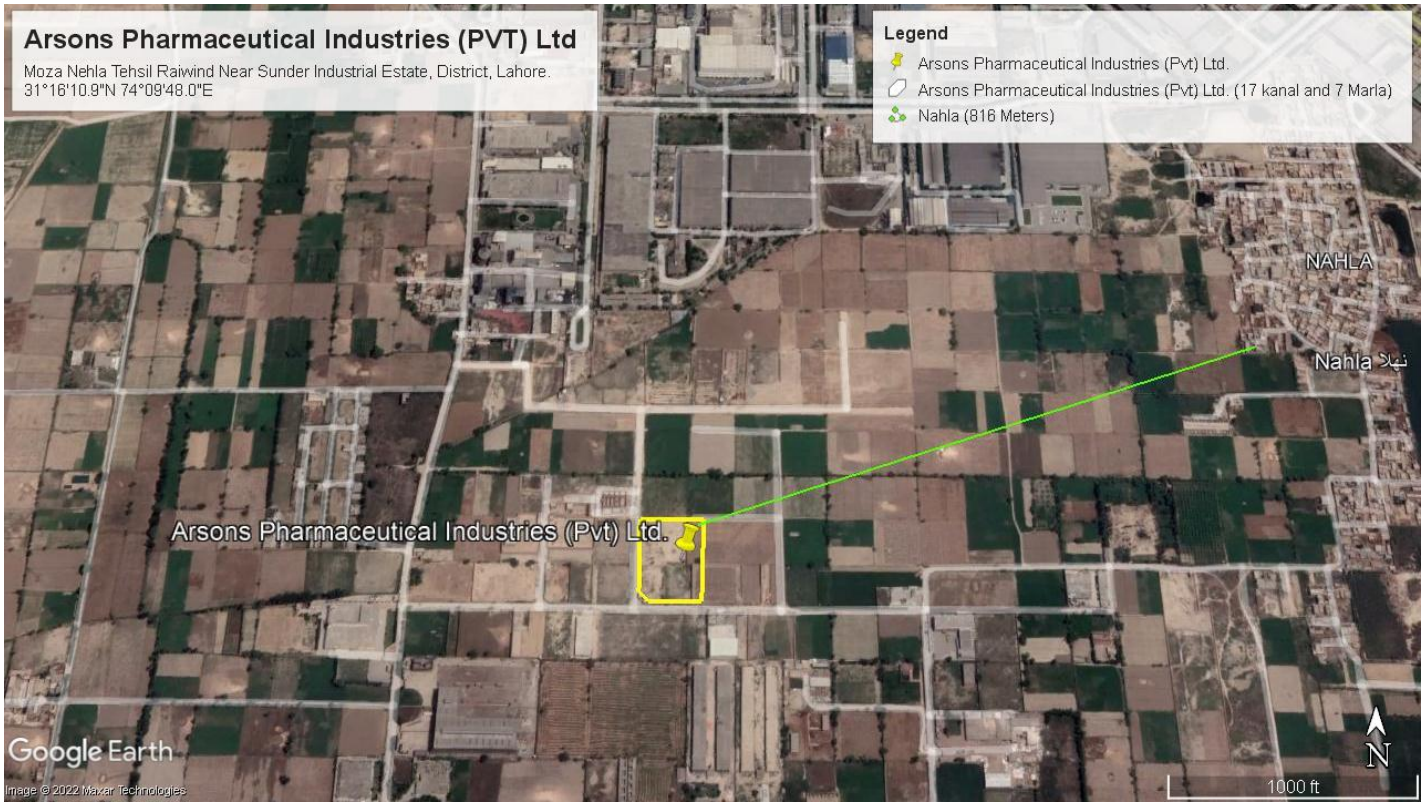


Figure 1: Project Site

Environmental sensitivity of the project includes the distance between the project area periphery from ecologically important features and socially significant infrastructures present in the study area. No ecology sensitive receptor such as; forest or reserved area is present within 10 km vicinity that could be impacted due to the installation and operation of the proposed project.

There are no particular sensitive areas as project is located far from populated areas.

1.4 Regulatory Compliance

As per IEE/EIA Regulations 2000, it is mandatory for the proponent of any development project to obtain Environmental Approval (NOC) from EPA by filing an IEE or EIA as the case may be. The said project is proposed by the proponent to meet the ever-increasing demand of medicinal products for the development. For this purpose, the proponent has decided to engage environmental consultants, M/S Central Environmental Services and EnvironTech Consultants to prepare EIA Report. The purpose of this study is to identify the environmental and social baseline of the project and study area i.e., physical, biological, socio-economic, cultural changes and to assess all possible impacts anticipated during the installation and operation phases

of the proposed project with the aim to find out appropriate mitigation measures to either eliminate those impacts or to bring them to acceptable level as well as to formulate Environmental Management and Monitoring Plan (EMMP) for implementation in sustainable manner. This EIA Report provides relevant information as required under the officially approved format, to help the decision makers i.e., EPA Punjab before issuing for the Environmental Approval.

Following rules, regulations and acts are considered for the commencement of the proposed project:

- Punjab Environmental Protection Act, 1997 (Amended 2012)
- Punjab Environmental Quality Standards (PEQS)
- Self-Monitoring and Reporting Rules (SMART)
- Punjab Fertilizer Act 2018
- Environmental, Health and Safety Guidelines

1.5 The Proponent

The details of the proponent of the proposed project are given below:

Table 3: Details of Proponent

1.	**Name**	**Muhammad Arshad Javed S/O Mukhtar Ahmad**
2.	Company	Arsons Pharmaceutical Industries (PVT) Ltd.
3.	Address	House no. 135-F, Sector EME, DHA, Multan Road, Lahore.

1.6 Scope of Project

Pakistan has a very vibrant and forward-looking Pharma Industry. At the time of independence in 1947, there was hardly any pharma industry in the country. Today Pakistan has about 759 pharmaceutical manufacturing units including those operated by 25 multinationals present in the country. The Pakistan Pharmaceutical Industry meets around 70% of the country's demand of Finished Medicine. The domestic pharma market, in term of share market is almost evenly divided between the Nationals and the Multinationals.

The National pharma industry has shown a progressive growth over the years, particularly over the last one decade. The industry has invested substantially to

upgrade itself in the last few years and today the majority industry is following Good Manufacturing Practices (GMP), in accordance with the domestic as well as international Guidance. Currently the industry has the capacity to manufacture a variety of product ranging from simple pills to sophisticated Biotech, Oncology and Value Added Generic compounds.

Pakistan is a developing pharmaceutical market, with a large population and economic progress evident, but per capita drug spending was rather low at around US$9.30 in 2007. Private spending accounts for 65% of total healthcare expenditure sourced through out of pocket payments, international aid and religious or charitable institutions. Pharmaceutical spending accounts for less than 1% of the country's GDP, comparable to levels in some neighboring countries but above that in some of the South Asian countries. The forecast period is likely to witness the marginal strengthening of the generics sector, albeit more in terms of volumes than values. The share of generics is also likely to increase further as major drugs come off-patent in the near term, to the likely benefit of the generics-dominated local industry.

The Pakistan pharma industry is relatively young in the international markets with an export turnover of over US$ 100 Million as of 2007. Pakistan Pharma Industry boasts of quality producers and many units are approved by regulatory authorities all over the world. Like domestic market the sales in international market have gone almost double during last five years. The pharma industry is focusing to an Export Vision of USD 500 Million by 2013. In the meantime, exports are also likely to be boosted by new regional and global opportunities.

Hence, keeping in view the above facts the proposed project worth establishing, and it will help in upsurge health as well as economic conditions of the country.

1.7 Details of Consultant

The proponent of the **Arsons Pharmaceutical Industries (PVT) Ltd.** has engaged **Central Environmental Services (Pvt) Ltd.** & **EnvironTech Pvt Ltd.** to carry out the EIA Study for the installation and operation of aforesaid project in accordance with Punjab-EPA guidelines. This will be a joint venture of both the companies. For this purpose, the company engaged the group of professionals which comprises of environmental specialists and social scientists. The details of the consultant are given below:

Table 4: Consultant Details

Sr#		Consultant Details
1	Consultant	***Central Environmental Services (Pvt) Ltd. & EnvironTech Consultants (Pvt) Ltd.***
2	Address	Office no.11 (2nd floor) Centre point Plaza, Main Boulevard Lahore.
3	Contact No.	0303-4342302
	Focal Person	
4	Name	Kamal Ahmed Cheema (C.E.O)

To prepare EIA Report of the respective project the company engaged the following experts. The details of the experts are given below:

Table 5: List of Experts

Name of expert	*Position held*	*Highest Qualification*
Dr. Mateen Shafqat	Chief Advisor	PhD Environmental Sciences, PMAS, Arid Agriculture University
Kamal Ahmed Cheema	Chief Environmentalist	M. Phil. Environmental Economics, PIDE, Islamabad
Mr. Shahzaib Ahmed	Social Scientist	M. Phil Development Studies, PIDE, Islamabad.
Arslan Iqbal	Environmentalist	M. Phil Environment Sciences, The University of Lahore BS Environmental Sciences The University of Lahore
Jawad Shafiq	Environmentalist	BS Environmental Sciences University of Gujrat
Amna Hafeez	Environmentalist	M.Sc. Mountain Conservation and Watershed Management, University of the Punjab, Lahore
Rahma Butt	Environmentalist	M.Phil. Environmental Science, U.E.T Lahore.

Saba Nazir	Environmentalist	M.Phil. Environmental Science, UOL Lahore.

1.8 Purpose of Report

The main objectives of this EIA Study were:

- To determine and record the state of the environment of the project area to establish a baseline in order to assess the suitability of the project in that proposed area
- To identify pre-construction/design, construction and operation activities and to assess their impacts on environment
- Provide assistance to the proponent for planning, designing and implementing the project in a way that would eliminate or minimize the negative impact on the biophysical and socio-economic environment and maximizing the benefits to all parties in the cost-effective manner
- To present mitigation and monitoring plan for smooth implementation of the suggested mitigation measures and supervise their efficiency and effectiveness
- To provide opportunity to the public for understanding the project and its impacts on the community and their environment in the context of sustainable development
- Prepare an EIA Report for submission to the EPA, Punjab for Environmental Approval (NOC)

2. SCREENING AND SCOPING

2.1 Screening/Type and Category of Project

Section 12 of Punjab Environmental Protection Act, 1997 (amended 2012) states "No proponent of a project shall commence construction or operation unless he has filed with the Government Agency designated by Federal Environmental Protection Agency or Provincial Environmental Protection Agencies, as the case may be, or, where the project is likely to cause an adverse environmental effects an Environmental Impact Assessment (EIA), and has obtained from the Government Agency approval in respect thereof." Punjab Environmental Protection Act provided the guidelines for categorizing the projects. According to **Schedule-II** of IEE and EIA Regulations, 2000; the proposed project falls under **Category B (Manufacturing and Processing)** i.e., the project requires an EIA Study. Thus, an EIA Report is being prepared and submitted accordingly for approval.

The proposed project is the manufacturing of antibiotics under 49 different Products.

2.2 Scoping:

1. Spatial and Temporal Boundaries of Environmental Assessment:

Temporal and spatial boundaries for the effects assessment are defined by the characteristics of the project and the VECC being assessed. These boundaries encompass time periods and areas during and within which the VECCs are likely to interact with or be influenced by the project.

- Temporal Extent (during construction and operation)
- Spatial Extent (local or widespread)

2. Views, Concerns and Suggestions of Various Stakeholders

Community showed a lot of concerns; a few are being mentioned here:

- Removal of shrubs and trees should be avoided to the extent possible
- The project will become the source of income for local to earn their livelihood easily and honorably
- The area will become further industrialized
- For the solid waste management and waste disposal, proper disposal techniques should be adopted
- Employment opportunities will be generated, and locals should be hired on the priority basis

- The air pollution is one of the major impacts of the proposed project, so ambient air quality should be monitored regularly
- Water spraying/sprinkling should be done on the regular basis during construction phase to avoid dust emissions
- Removal of shrubs and trees should be avoided to the extent possible
- Good relations with the local communities will be promoted by encouraging Contractor to provide opportunities for skilled and unskilled employment to the locals as well as on-job training
- The contractor should prefer hiring local labor from adjacent nearby villages
- Indigenous tress around the facility should be planted to control air pollution and as the compensation
- Noise reducing barriers should be installed to reduce noise pollution as the nearest community lies within the radius of 0.8 km

Concerns

- Workers should be hired from local community
- Proper disposal of solid waste should be practiced
- Proper disposal of wastewater should be practiced
- Indigenous tress around the facility should be planted to control air pollution
- Removal of shrubs and bushes should be avoided to the extent possible

3. Significant impacts and factors to be determined

The proposed project is of manufacturing of pharmaceutical products. The nature of the land is self-developed industrial and current status of land is open land having native vegetation such as Neem, Kikar, Safeda and wild grass. The study area is fertile, leveled and agricultural land. In addition, to the noise and fugitive dust emissions during the development phase solid waste management and disposal issues may arise along with wastewater disposal issues. There are few minor impacts associated with the operation of manufacturing unit includes the management of the municipal solid waste generated during the, raw-material storage which will be managed according to local practices of area.

The impacts from the establishment of Arsons Pharmaceutical Industries (PVT) Ltd. will occur during the construction and operation due to the civil work involved and the people residing in the project area. These issues included; noise generation, fugitive

dust emissions, solid waste management, wastewater disposal, top-soil removal, Health and Safety issues and change in the geographic features of the area. These all problems should be addressed on-site where they are being generated, to avoid the residual or adverse impacts.

2.3 Alternatives

The details of the site alternatives and technology alternatives are discussed below:

Site Alternatives

No other site alternative was available to be considered as feasible option for the installation of the plant as the land is owned by the proponent. The proposed site was selected because of the following reasons;

1) The site is at the safe distance from the nearest residential area.
2) The site is well connected to the other parts of the city through Sharif complex-Manga Road link and main Raiwind road.
3) No human settlements displacement or relocation associated with the project development and operation
4) Operation of the proposed processing unit in the respective zone will provide job opportunities to local people and will improve their socio-economic status of the study area as 10 employees will be hired during the operational phase

Project Alternatives.

Although Pakistan's pharmaceutical and healthcare sectors are expanding and evolving rapidly, about half the population has no access to modern medicines. Clearly this project presents an opportunity, but much more work needs to be done by the government and industry's stakeholders.

Pharma companies are facing challenges with developing new medicines and meeting the complex demands of clients. Unprecedented challenges in the pharmaceutical industry are raising concerns about innovations that increase R&D, administrative and sales cost. Some of the challenges include:

- Expiring patents
- Increase in competition by generic companies
- Slower sales growth rates
- Decrease in the number of innovative drugs under development

- Tighter regulatory reviews and standards

The Pakistan Pharmaceutical Industry is a success story, providing high quality essential drugs at affordable prices to Millions. Technologically, strong and self-reliant National Pharmaceutical Industry is not only playing a key role in promoting and sustaining development in the vital field of medicine within the country but is also well set to take on the international markets.

As the proposed project is need of time so no project alternative is considered by the proponent.

Environmental Alternatives:

No important religious, archaeological, recreational site or ecologically/declared protected area and human settlement exists within proximity of the selected site i.e., within 5 Km which is a safe distance. In view of these facts, it can be concluded that the selected site is best suited for the project and will not pose any adverse impact or threat on any component of the environment.

Economic Alternatives:

The Pakistan pharma industry is relatively young in the international markets with an export turnover of over US$ 100 Million as of 2007. Pakistan Pharma Industry boasts of quality producers and many units are approved by regulatory authorities all over the world. Like domestic market the sales in international market have gone almost double during last five years. The pharma industry is focusing to an Export Vision of USD 500 Million by 2013. In the meantime, exports are also likely to be boosted by new regional and global opportunities. In the light of above facts, there is a need to encourage local market development, which are also economical to Country mates.

3. DESCRIPTION OF PROJECT

This section of the study concentrates on details of the project and its salient features; such as its location, site layout, objectives, selection of alternative sites and technology, cost and magnitude of operation at various phases and process employed for the processing of the proposed project.


3.1 Objectives of Project

The main objectives of the proposed project are as under:-

- Responding to the country's national priorities to produce quality Medical Devices at latest art of technology plant with international health standards and without polluting environment
- To provide the employment to the people
- To change the social life style of the area
- Revenue generation for the Govt.
- To upgrade the socio-economic conditions of the area

3.2 Location and Layout of Project

The proposed location for the installation of proposed project of Arsons Pharmaceutical Industries (PVT) Ltd. is at Moza Nehla Tehsil Raiwind Near Sunder Industrial Estate, District, Lahore. The geographical location of the proposed area is 31°16'10.9"N 74°09'48.0"E.

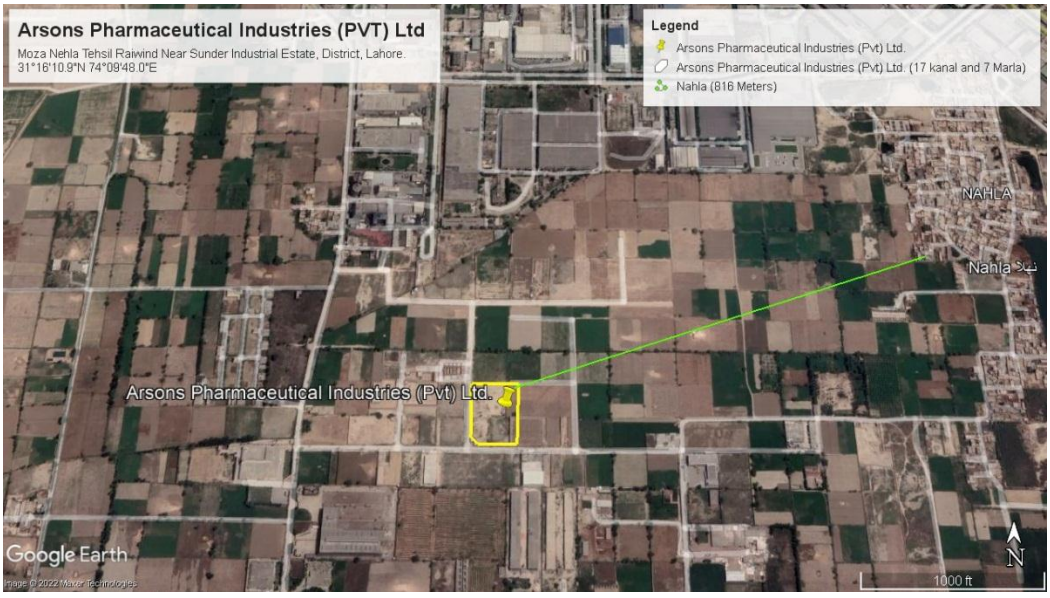

Proposed Project Site

3.3 Land Use on Site:

The surface land in and around the project area is leveled and fertile and is self-developed industrial in nature. No ecology sensitive receptor such as; forest or reserved area is present within 5 km vicinity that could be impacted due to the installation and operation of the aforesaid project.

3.4 Road Access

The project site is linked to Sharif Complex- Manga Road and main Raiwind road.

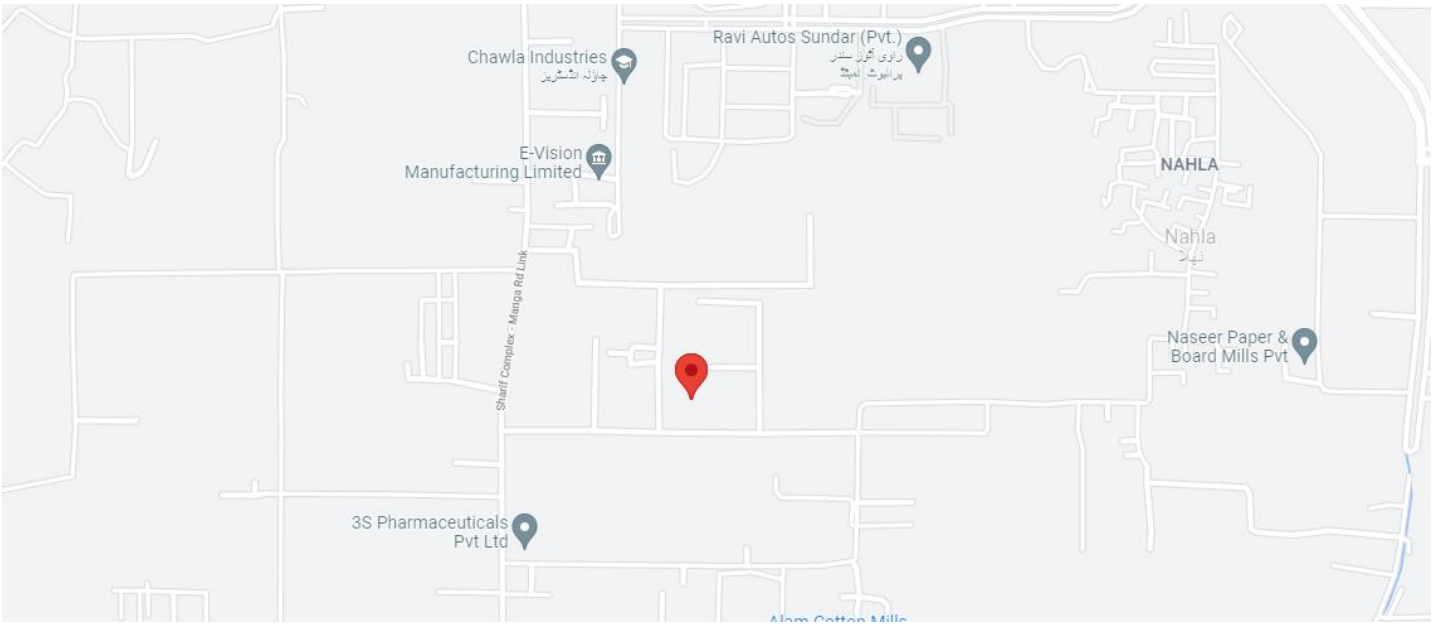


Figure 2: Road Access Map

3.5 Vegetative Features

The area around the project area is self-developed industrial. The main crops grown around the project area includes; rice, sugarcane and maize whereas, the vegetative features of the area include; safeda, bari, neem and kikar.

Table 6: Vegetative Features of the Project Area

Sr.#	Local Name	Type	Biological Name
1	Kikar	*Throne Tree*	*Prosopis juliflora*
2	Safeda	*Tree*	*Eucalyptus*
3	Sheesham	*Tree*	*Dalbergia sissoo*

4	Peepal	*Tropical Tree*	*Ficus religiosa*
5	Wild Grasses	*Grass*	--

3.6 Amenities

The following social amenities are present at site and the management of the waste (solid waste and effluents) is explained in sub-sections below:

3.6.1 Electricity

Electricity will be purchased from WAPDA(LESCO).

3.6.2 Ground Water Resource

During operational phase ground water will be consumed. The water will be pumped from ground from the depth of 250ft. will be loss as the result of evaporation and 200-300 liters/day will be used for the overall consumption.

3.7 Management Plans

Following management plans will be employed to reduce the impact of the proposed activity

3.7.1 Air Emissions

Particulate dust will be generated during construction phase and to deal with the air emissions during the operational phase cyclones will be installed with the efficiency of more than 95% keeping in view of PEQs. For safety purpose the workers dealing with the process activities will be provided with masks, safety shoes and all other necessary PPEs. To reduce the public nuisance native trees will be planted on the boundary to reduce the nuisance and to reclaim the disturbed soil effectively.

Design and Working principle of Cyclones

A cyclone removes particulates by causing the dirty airstream to flow in a spiral path inside a cylindrical chamber. Dirty air enters the chamber from a tangential direction at the outer wall of the device, forming a vortex as it swirls within the chamber. The larger particulates, because of their greater inertia, move outward and are forced against the chamber wall. Slowed by friction with the wall surface, they then slide down

the wall into a conical dust hopper at the bottom of the cyclone. The cleaned air swirls upward in a narrower spiral through an inner cylinder and emerges from an outlet at the top. Accumulated particulate dust is periodically removed from the hopper for disposal.

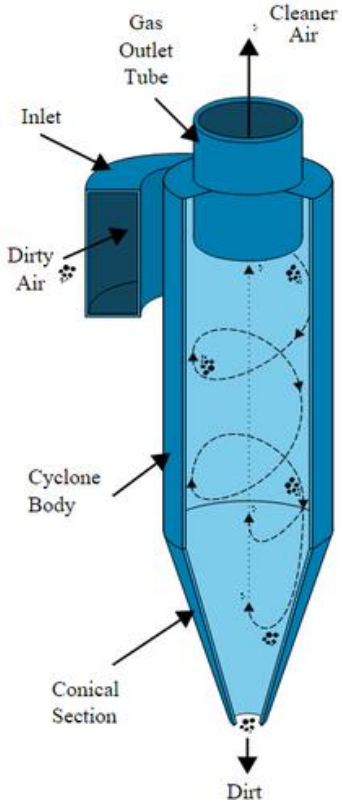


Figure 3: Cyclone for Air Emission Control

Table 7: Specification of Cyclone

Dimensions	Efficiency	
	Stairmand	Swift
$H_c/D_C=K$	0.5	0.44
$B_C/D_C=K_B$	0.2	0.21
$S_C/D_C=K_S$	0.5	0.5
$D_i/D_C=K_i$	0.5	0.4
$L_C/D_c=K_L$	1.5	1.4
$Z_C/D_C=K_Z$	2.5	2.5
$D_S/D_C=K_D$	0.375	0.4

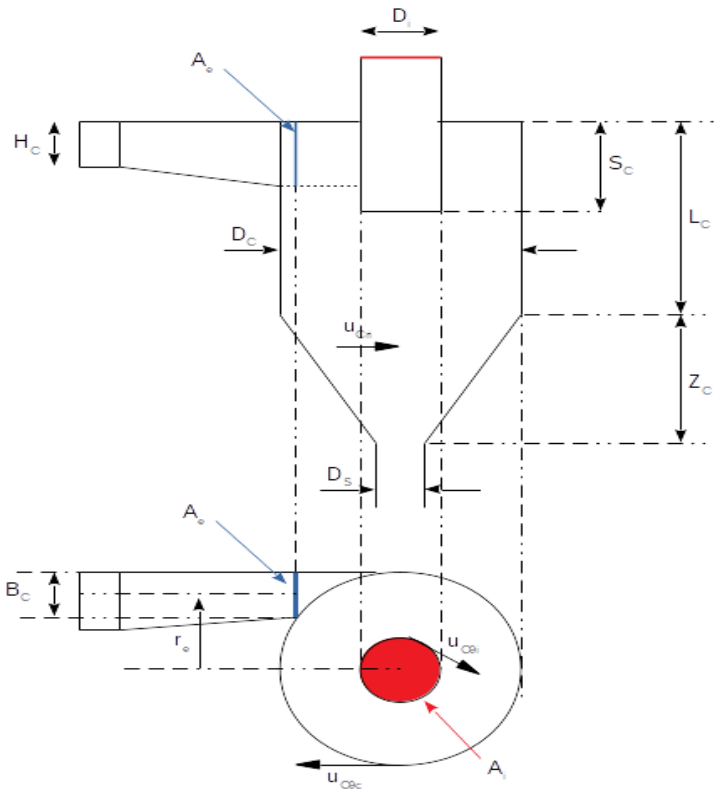


Figure 4: Design of Cyclone

3.7.2 Wastewater Management and Disposal

In the proposed project the wastewater will be generated from process as well as municipal activities. The wastewater from the process activities will be treated by a wastewater treatment plant with the capacity of 1000 liters/shift design of treatment plant is attached as an Annexure with the EIA report. The municipal amount of the wastewater generated will be 200 liters (0.2m³) by the sanitation activities if per person wastewater generation is 20 liters and the manpower is 10 (20*10). This wastewater will be discharged in settling tank and ultimately in the drain. Water balance at site will be:

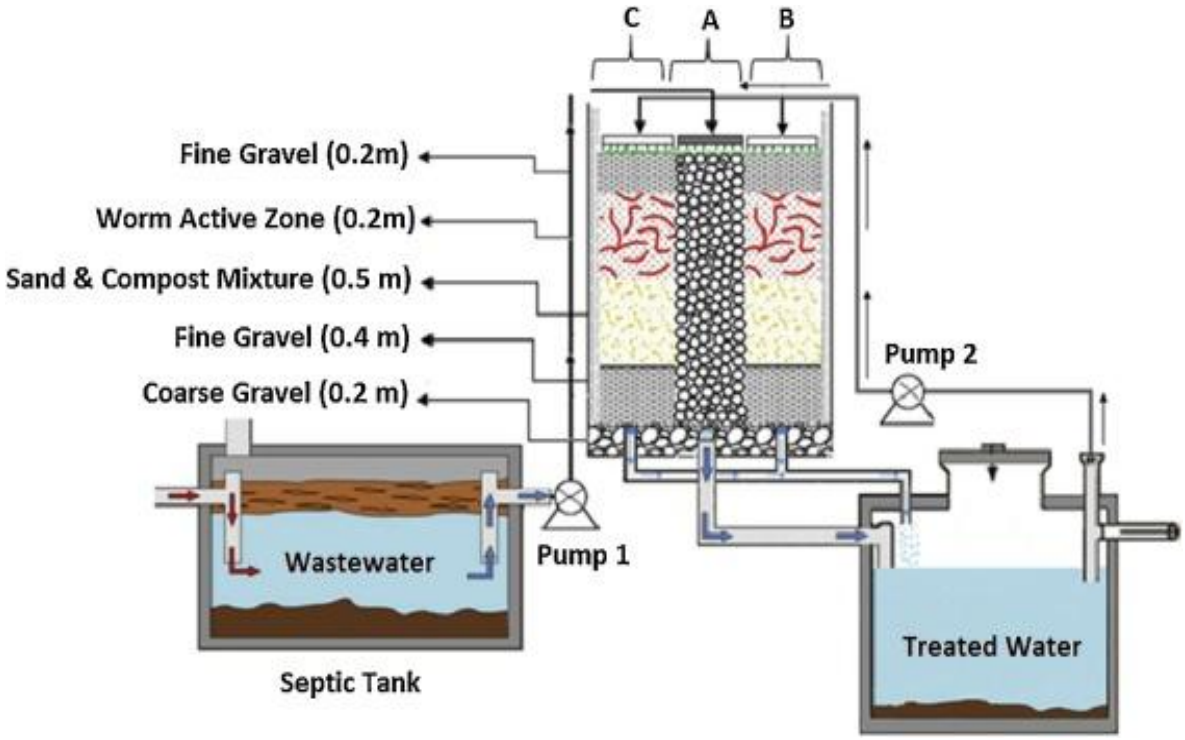


Figure 5: Design for Septic Tank

It is proposed that tree plantation will also be carried out. The generated wastewater will be consumed for on-site horticultural activities after primary treatment.

3.7.3 Waste Management

Most of the solid wastes that will be generated during the daily work can be divided into 3 main categories:

i. The ordinary household wastes that the workers and the staff generate all-day around; e.g. kitchen and food residues, clothing, personal unneeded articles, etc.

ii. Municipal residues; e.g. grass clipping, strings, scraps je sort, etc.

iii. Product Packing.

Quantity of solid waste will 25 kg/day and is going to be dumped in the containers (number, capacity and type will be identified and sufficient for the needs) which will be emptied by the municipality trash collection cars according to the acting regulations under the supervision of the concerned authorities. Collecting the trash/garbage will be followed on daily basis in disposable environmental friendly shopping bags.

3.8 Staff/Manpower

During construction phase of the proposed project about 50-55 people will be engaged for development of the project. Around 50+ workers will be required during process related activity. The breakdown of the workers employed is given below:

Table 8: Details of the Officers

Sr#	Designation	No.
1	Production Manager	03
2	Deputy Manager	03
3	Asst. Manager	04
4	HSE Manager	03
5	Electrical Manager	02
6	Mechanical Manager	02
7	Metallurgical Manager	01
8	HSE Inspectors	03
Total Number of Officers		**20**

3.9 Emergency Preparedness

Emergency response preparedness committee will be formulated consisted of heads of all departments and nominated members. Project Manager will be the head of the team who will chair the Committee. In the case of emergency, he will immediately inform the concerned authorities. HSE Manager will be responsible for on-site HSE management.

First aid facilities will be available at facility which will include; blankets, hot water bottles, sterilized dressing, snake bite kit, cotton and iodine (2% alcohol).

3.9.1 Safety Trainings

Skilled, semi-skilled and un-skilled staff will be provided with proper training about the work and safety practices that need to adopt during the process activities.

3.9.2 Use of Drugs and Narcotics

Drugs and narcotics are strictly prohibited during working hours in working area. Smoking will be only allowed during rest timings at properly isolated places.

3.9.3 Personal Protective Equipment's

Following Personal Protective Equipment (PPEs) will be provided to the workers:

- ✓ **Safety Helmet**
- ✓ **Safety Shoes/Dry Shoes**
- ✓ **Dust Mask**
- ✓ **Safety Gloves**
- ✓ **Safety Jackets**
- ✓ **Earmuffs**
- ✓ **Insulating Gloves and Suits**

3.10 Cost and Magnitude of Operation

The proposed project includes the production of different pharma products. List of machinery is attached as an annexure with the EIA report.

- ➢ The activities will include:
- ➢ Installation of the machinery.
- ➢ Purchase of lab instruments
- ➢ Installation of the filtration and liquid unit.
- ➢ Health and Safety Management at site
- ➢ Transportation of raw-material and final product
- ➢ Plantation of trees

Table 9: Breakup of Project Cost

Sr. No	Description	Amount Rs Millions
	Land Purchasing	10.0
	Civil Works	25.0

	Plant and Machinery	10.3
	Laboratory	10.00
	Licensing	5.00
	Environmental Budget	6.70
Total		67.0

3.11 Land ownership Documents

Site selected for the proposed project installation is under undisputed partnership and owned by three persons, power of attorney has been given to proponent Mr Asim Raza Khosa. Land ownership documents have been attached as Annexure of EIA Report, which clearly shows that the selected area for the installation of Arsons Pharmaceutical Industries (PVT) Ltd. has been owned by the proponent through a proper channel.

3.12 Schedule of implementation

The completion duration of Arsons Pharmaceutical Industries (PVT) Ltd. is about 9-12 months. There will be a symmetrical process. The process is divided in to 3 phases

Preconstruction phase

This phase includes:

- Site investigation & Evaluation
- Budgeting
- Design
- Schedules of working
- Obtaining all relevant NOC

Construction phase

This phase includes:

- Management team& Construction Crew
- Excavation
- Construction of building
- Provision of allied facilities

- Mitigation process
- Amenities Development
- Managing safety
- Monitoring & Evaluation

Operational phase

This phase includes:

- Implementation of fire safety, emergency evacuation plans
- Security management
- Finishing of amenities
- Plant operations

3.13 Process Description

The project includes the manufacturing of pharmaceutical products.

3.13.1 Basic Raw Materials Required by the Proposed Unit

The basic raw materials such as Liquid Solvent, Solids for Reaction and Gases will be used for manufacturing of finished products. Approximately 50 ton/Month of above mentioned raw materials would be required for the project.

Area Reserved for Raw Material:

- 7807 SFT

3.14 Finished Products

The final products which will be produced by the proposed project/unit are sub-catogaries in three categories. The detail of finished products is as under:

Sr. No	Product Name	Generic	Raw Materials
1.	Belladerma Plaster Bandage	Capsicum Powder	Capsicum Powder Comphor Menthol Fabric Hot melt Adhesive Zinc Oxide
2.	Lion Plaster Bandage	Belladonna Powder/ Capsicum Powder	Belladonna Powder Capsicum Powder Comphor Menthol

			Fabric Hot melt Adhesive Zinc Oxide
3.	Belladonna Plaster Bandage	Belladonna Powder	Belladonna Powder Comphor Menthol Fabric Hot melt Adhesive Zinc Oxide
4.	Arsoplast Bandage	Acriflavine Pad	Zinc Oxide Paraffin Solvent Oil Petroleum Jelly Acriflavine Pad 19mm Fabric 41”
5.	FastoPlast Bandage	Acriflavine Pad	Zinc Oxide Paraffin Solvent Oil Petroleum Jelly Acriflavine Pad 19mm Fabric 41”
6.	Fabric Banadage	Acriflavine Pad	Zinc Oxide Paraffin Solvent Oil Petroleum Jelly Acriflavine Pad 19mm Fabric 41”
7.	Handy Plast Bandage	White Pad	Zinc Oxide Paraffin Solvent Oil Petroleum Jelly White Pad Fabric 41”
8.	Hi-Plast Bandage	Acriflavine Pad	Zinc Oxide Paraffin Solvent Oil Petroleum Jelly Acriflavine Pad 19mm Fabric 41”
9.	Plastic Bandage	Acriflavine Pad	Zinc Oxide Paraffin Solvent Oil Petroleum Jelly Acriflavine Pad 19mm Fabric 41”
10.	Kid-Plast Bandage	Acriflavine Pad	Zinc Oxide Paraffin Solvent Oil Petroleum Jelly Acriflavine Pad 19mm Fabric 41”

11.	Arsotin Bandage	Farmycetin Sulphate…. 1%	Farmycetin Sulphate 100% White Soft Paraffin Leno Fabric
12.	Arso-Tulle Bandage	Chlorhexidine acete 0.5%	Chlorhexidine Acetate 100% White Soft Paraffin Leno Fabric
13.	Care Guaze Bandage	Fabric Plain Weave	Fabric
14.	Care Eye Pad Bandage	Absorbent Tissue	Fabric
15.	Zinco Adhesive Bandage	Zin Oxide…10% B.P.	Zinc Oxide Solvent oil Paraffin oil Petroleum Jelly Capsicum Hot melt adhesive
16.	Adhesive Plaster	Zin Oxide …10% B.P.	Zinc Oxide Solvent oil Paraffin oil Petroleum Jelly Capsicum Hot melt adhesive
17.	MediSwabs	IPA 70 %	Isopropyl Alcohol Deionized Water Non-Woven fabric Pad
18.	Arsopore Adhesive Bandage	Adhesive Mass	Hot melt Adhesive Non-woven Paper
19.	Lumbo Bella Plaster Bandages	Belladonna Powder… 0.33%	Belladonna Powder Comphor Menthol Fabric Hot melt Adhesive Zinc Oxide
20.	Sofray Tulle	Farmycetin Suplhate …1%	Farmycetin Sulphate 100% White Soft Paraffin Leno Fabric
21.	Multipore Tap	Adhesive Mass	Hot melt Adhesive Non-woven Paper
22.	Fixopore (Stretchable Fixation)	Adhesive Mass	Hot melt Adhesive Non-woven Paper

3.14.1 Manufacturing Process for Arsoplast Banaged, FastoPlast Bandage, Fabric Bandage, Handy Plast bandage, Hi-Plast Bandage, Plastic Bandage and kid-Plast Bandage:

Following steps are involved in the production of aforesaid bandages:

i Dispensing:

In this step quantity of each product is balanced as per ratio required for the mixing of raw materials i.e., for Arsoplast 100 kg zinc oxide, 40 kg paraffin, 700-liter, solvent oil, 8 kg of petroleum jelly, Acriflavine pad 62.4 m and fabric 4000 m will be required per batch.

ii Mixing

Second step involves mixing of all the quantified raw materials.

iii Coating

The prepared mixture being coated with the fabric.

iv Slitting and Application of Acriflavine pad:

It will be the final step-in manufacturing of bandages in which acriflavine pad is incorporated in the bandage after slitting them into the desired size.

v Packing

Last step involves packing of final product into boxes which will be ready to dispatch to the market.

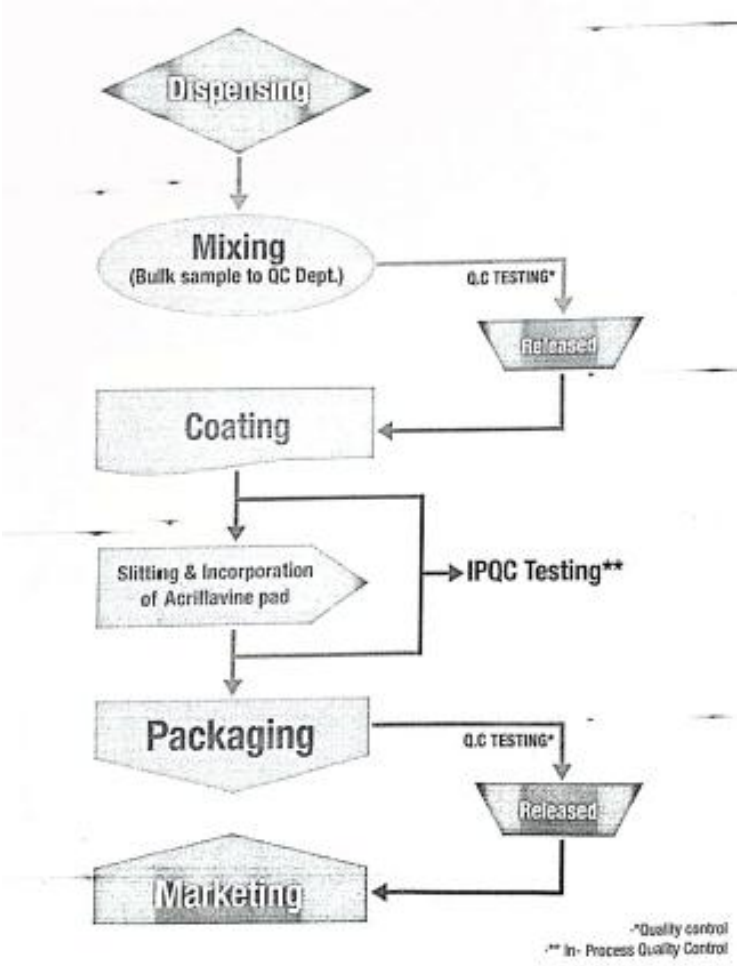


Figure 6: Process Flow Diagram for Arsoplast Bandage[1]

3.14.2 Manufacturing Process for Belladerma Plaster Bandage, Lion Plaster Bandage, Belladona Plaster Bandage and Lumbo Bella Plaster Bandages:

i Dispensing:

In this step quantity of each product is composed as per ratio required for the mixing of raw materials i.e., for belladerma 200 kg Capsicum Powder, 10 kg camphor, 20 kg menthol, 100 kg Hot melt Adhesive, 70 kg zinc oxide and fabric 3000m will be required per batch. For lion plaster belladonna and capsicum powder both will be used along with the above mention materials and for belladonna and Lumbo bella plaster only belladonna will be used with other materials.

ii Mixing

Second step involves mixing of all the quantified raw materials.

iii Coating

The prepared mixture being coated with the fabric in this step.

iv Slitting and Perforation:

It will be the final step-in preparation of bandages in which perforation of coated material will be done perforation is the involves puncturing the workpiece with machine to make air holes in it, after perforation slitting them into the desired size.

v Packing

Last step involves packing of final product into boxes which will be ready to dispatch to the market.

[1] (Process Flows and Production process will be same for FastoPlast Bandage, Fabric Bandage, Handy Plast bandage, Hi-Plast Bandage, Plastic Bandage and kid-Plast Bandage just the size and design of plaster will be different).

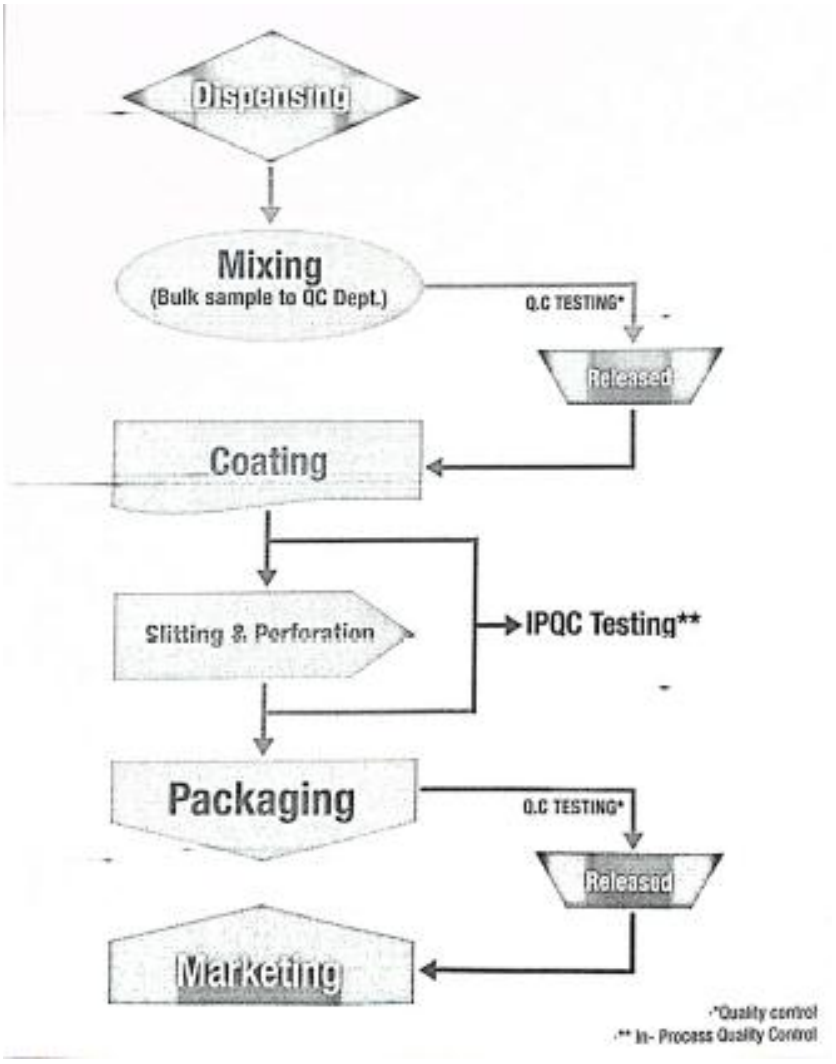


Figure 7: Process flow diagram for Belladerma Plaster Bandage[2]

3.14.3 Manufacturing Process for Arsotulle Bandage, Arsotin Bandage, Care Guaze Bandage, Care Eye Pad and Sofray Tulle:

To manufacture aforesaid mentioned bandages firstly the area and machinery will be washed and then cleaned out afterward dried with the help of mop. Once the area and machinery will be all dried monitoring area will be done to assess the hygiene. Once the area and machinery get according to desired conditions mixing of raw material for Arsotulle Chlorhexidine Acetate (0.225 kg), white soft paraffin (40.5 kg) and leno fabric (9.5 kg). While for Sofray Tulle and Arsotin bandage Farmycetin Sulphate will be used instead of Chlorhexidine Acetate. The minute proper mixing of raw material will be done Gauze incorporation shall be done in to the solution and after that it will be sealed and packed and will go through the step of sterilization which will be done

[2] Process Flows and Production process will be same for Lion Plaster Bandage, Belladona Plaster Bandage and Lumbo Bella Plaster Bandages).

introducing Gamma Rays from PARAS. Now after quality control testing and sterility test product is ready to dispatch.

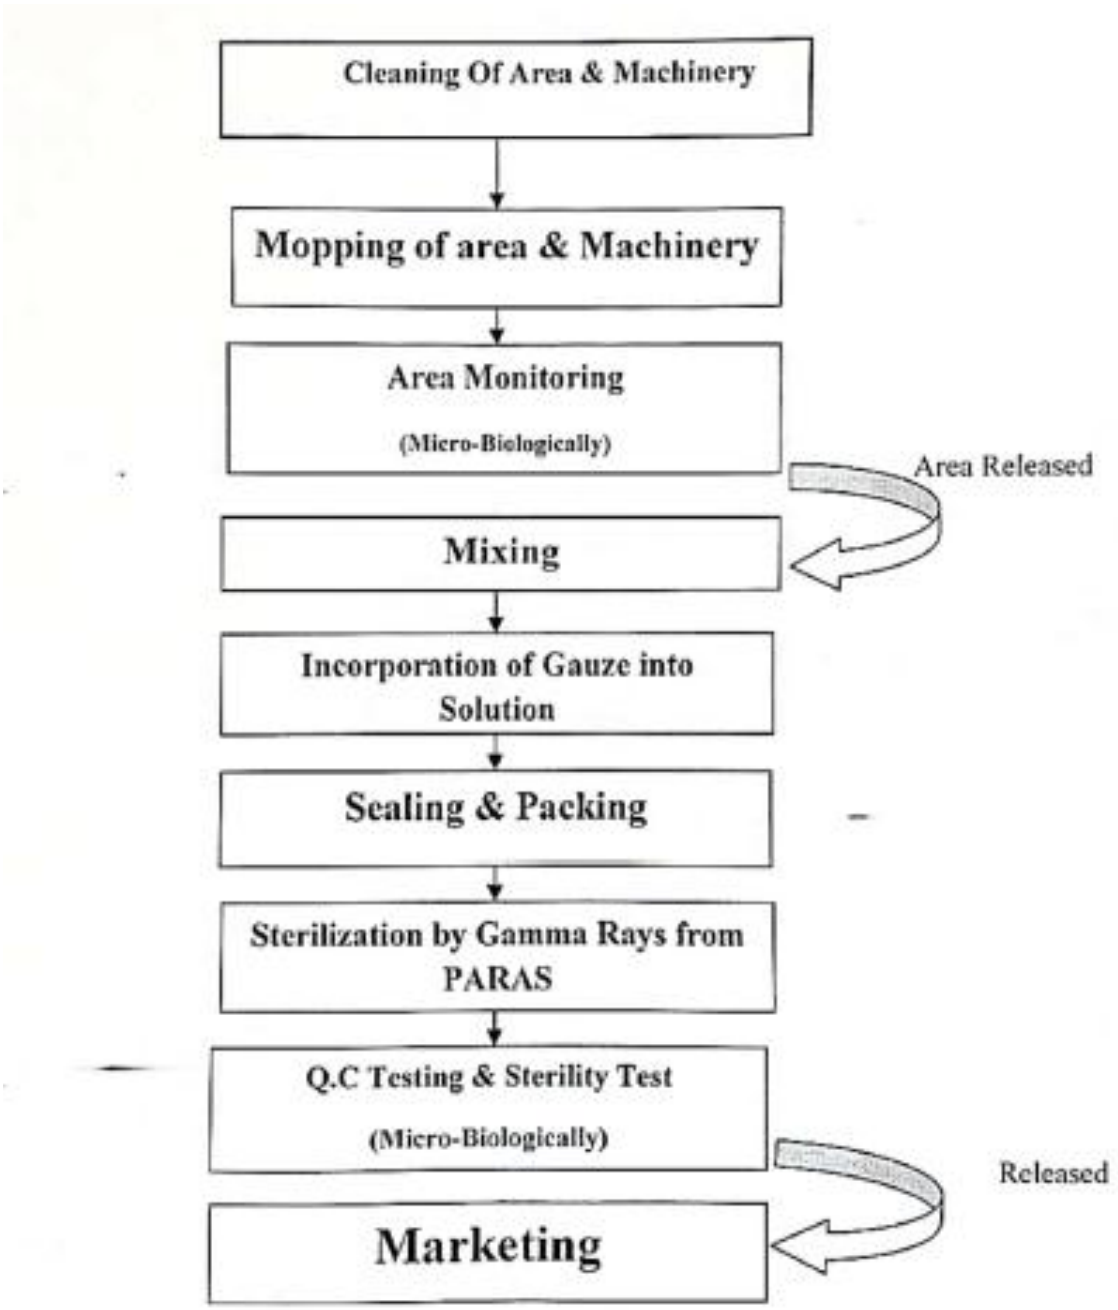


Figure 8: Process Flow for ArsoTulle Bandage

3.14.4 Manufacturing Process for MediSwab

Following process flow indicates each step involved in the manufacturing of mediswabs.


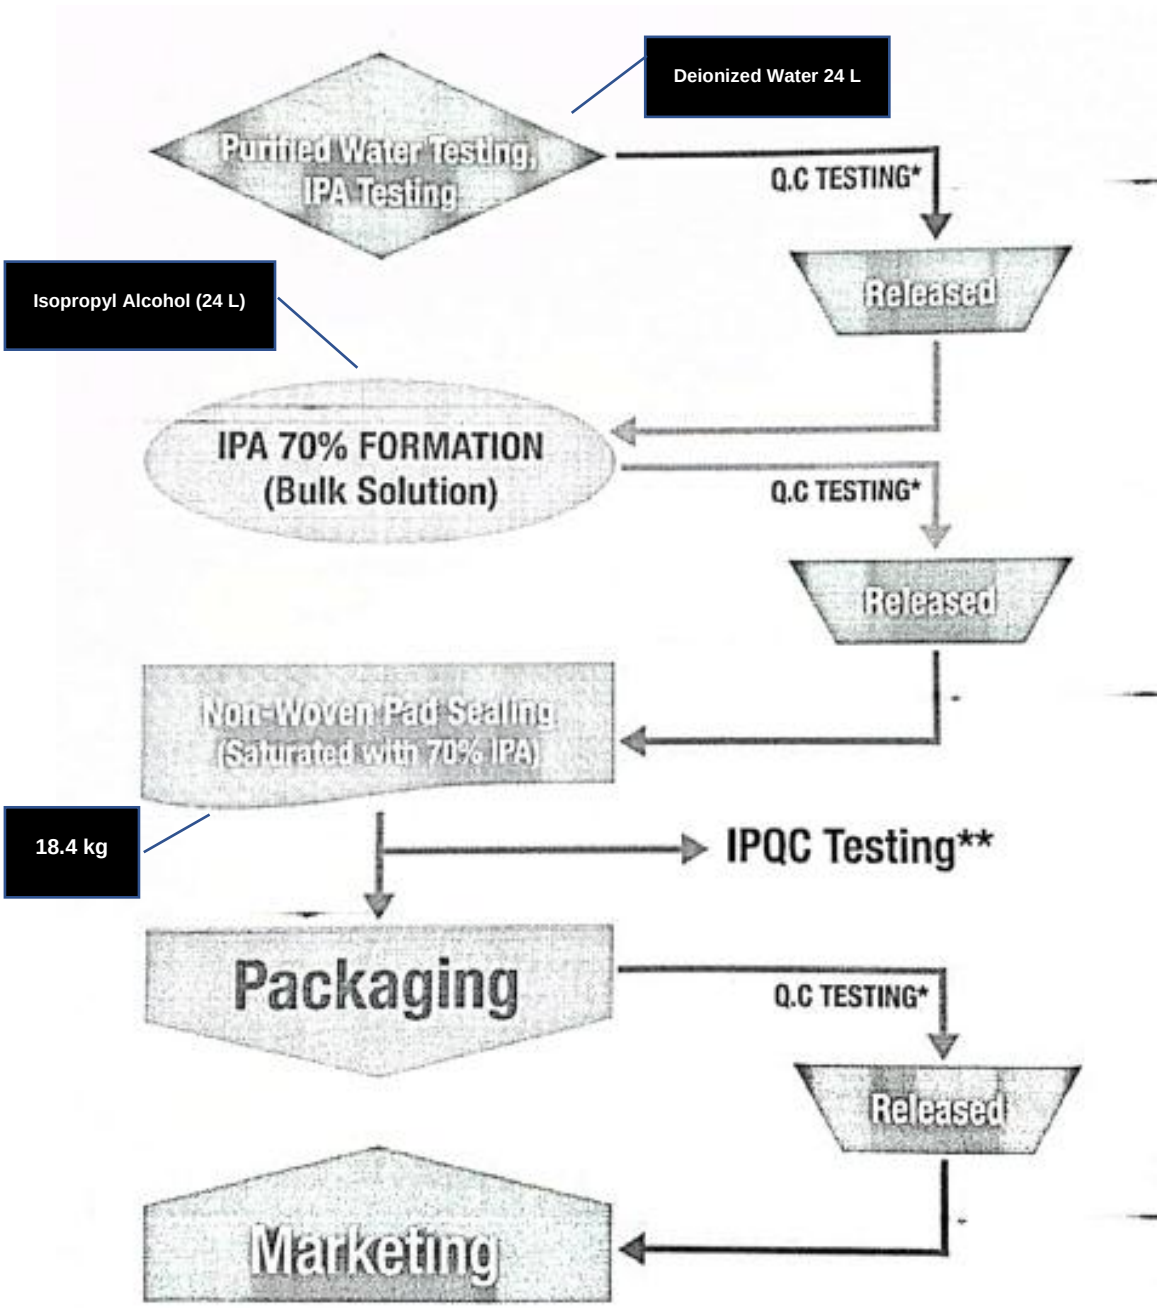


Figure 9: Manufacturing Process for Medi Swabs

3.14.5 Manufacturing Process for Zinco Adhesive Bandage and Adhesive Plaster

Figure: 9 shows the steps involve in the manufacturing of zinco adhesive bandage and adhesive plaster.

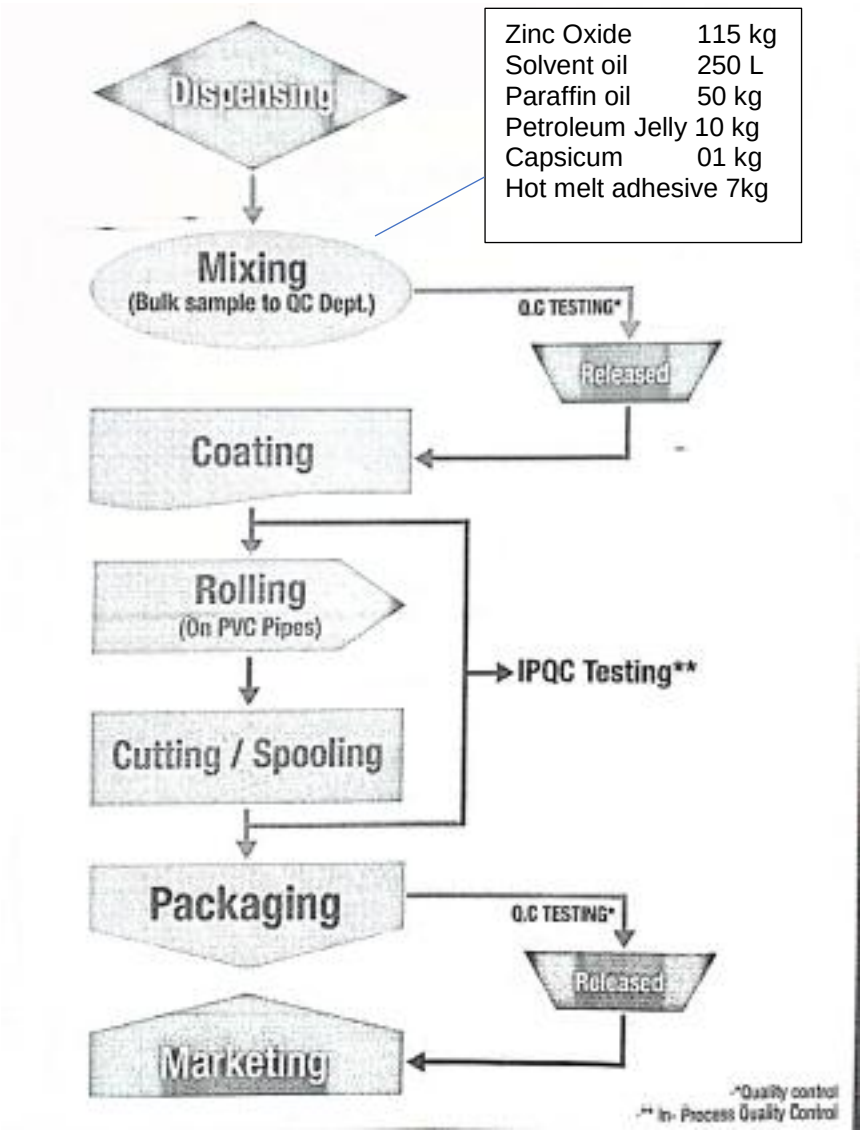

3.15 Relocation and Rehabilitation Plan

There exists no human settlement in safe radius of the selected project site to be displaced owing to the commencement of the proposed project. Moreover, no structure of any significance stands at the site is proposed to be relocated or dismantled. The project area is owned by the proponent. So, no restoration and rehabilitation are required.

4. DESCRIPTION OF THE ENVIRONMENT

This chapter provides baseline data (physical, biological and socio-economic parameters) related to the project and study area. The information has been compiled by using primary and secondary data resources. This chapter also refers to the theoretical analysis of the methodology adopted for collection of baseline data. The underlying principles and practices adopted in this regard are also discussed.

4.1 Methodology

The methodology employed to collect the baseline data and information regarding the social structure and various related parameters as discussed in sub-sections below:

4.1.1 Data Collection

The primary data was collected by visiting the project area and its communities in its nearby vicinity. The secondary data regarding physical parameters (topography, geology, seismology, and climate) was obtained by visiting relevant various government departments and their official websites. The biological parameters such as flora and fauna were studied by preparing a floristic list based on visual observation and fauna was studied by using opportunities approach. The species were recorded with reference to their existence in the project area. Information on wildlife fauna species (mammals, amphibians, reptiles, birds, etc.) in the assessment area was compiled based on opportunistic observation, gathering the existing information and consultation with local experts, community members and government and Non-Government Organizations (NGOs). The socioeconomic aspects were studied and analyzed by studying detailed village profile and by conducting household surveys.

4.1.2 Social Survey

The purpose of social survey was to record the present condition of the people living in the project area and to assess the expected project impacts on their life, subsistence systems and socio-cultural conditions. Prior to conducting the field surveys, the following steps were taken:

- Clear boundaries of the project area were identified
- Decided the sampling procedure in order to draw a representative sample size of the target population and households

- Developed the tools for data collection i.e. questionnaires to access the socio-economic status of the area

4.1.3 Sampling Design

Social baseline data of the persons residing in the study area has been estimated and collected through random sampling by using pre-developed questionnaires.

4.1.4 Questionnaires

In order to test the validity and reliability of the proposed questionnaires, they were reviewed to assess whether questions needed to be clarified, changed or re-sequenced and then a final editing of questionnaires was conducted prior to their application in the project area. The sample of socio-economic questionnaires used is attached as Annexure.

4.1.5 Data Editing and Analysis

The filled questionnaires and recorded information were compiled by the same field investigators who were involved in the data collection. This was done immediately after completing the field investigations. Data sets were processed. Analysis of the data and preparation of conclusions in the minimum possible time was done using statistical techniques of data analysis.

4.2 Review of Legal and Administrative Framework

The objective of reviewing legal and administrative framework is to obtain information on all legislation pertaining project development. The Socio-Environment Team of Central Environment Services reviewed the environmental policies, national, international and provincial laws and guidelines relevant to the development of project which helped in systematic identification of impacts.

4.3 Baseline Conditions

This chapter provides baseline data (physical, biological and socio-economic parameters) related to the project and study area

4.4 Physical Environment

Pakistan Can be divided into five broad physiographical regions. These are the mountainous regions of the north, the western highlands and plateaus, the sub-mountains Indus region, the Potohar Plateau, Salt Range, and the Indus Plain. Brief description of these regions are given below:

Region	Characteristics	Location	Height
Northern Mountainous	Hindu Kush Karakoram and Himalayan Mountain Ranges	Northern Part of KPK, Gilgit Agency, Northern Areas and Kashmir.	Rises above 8,000m
Western Highlands and Plateaus	Toba Kakar, Sulaiman, Central Baruhi, Saihan, Central Makran, Makran Coastal and Kirthar Ranges	Mainly in Baluchistan, also parts of Sindh and KPK	Between 1,200 to 3,000 m
Sub-Mountains Indus	Alluvial filled Basins	Plains of Peshawar Kohat and Bannu	Less than 1,000 m
Potohar Plateau and Salt Range	Flat to gently undulating surface, broken by gullies,	Mainly northern parts of Punjab, some parts of KPK	Less than 1,000 m
Indus Plain	Flood plains of the Indus, Jhelum, Chenab Ravi and Sutlej Rivers	Punjab and Sindh	Less than 1,000 m

4.4.1 Topography and soil

Lahore is generally flat and slopes towards south and south-west at an average gradient of 1:3000. It can be divided into two parts i.e. the low-lying area along River Ravi and the comparatively upland area in the east away from Ravi. The low lands are generally inundated by the river water during monsoon floods. River Ravi flows in the west of Lahore District forming a boundary with Sheikhupura District. The original

physiographic features like channels remnants and levees have been destroyed or changed by the construction of urban infrastructure. Flood plains have been confined by construction of embankments (bunds) and spurs. Sub-recent flood plain is 4 to 8 meters higher than the recent flood plain and can be identified at number of places i.e. Shalimar Garden, Moghalpura and Multan Road.

Terrain of the proposed project site is predominantly flat. Lahore district is situated at an average elevation of 210 meters above mean sea level. The alluvial subsoils are of late Pleistocene and were formed by the flood plains of river Ravi. These consist of clay, silt and sand. The thickness of clay increases with distance from the river bed.

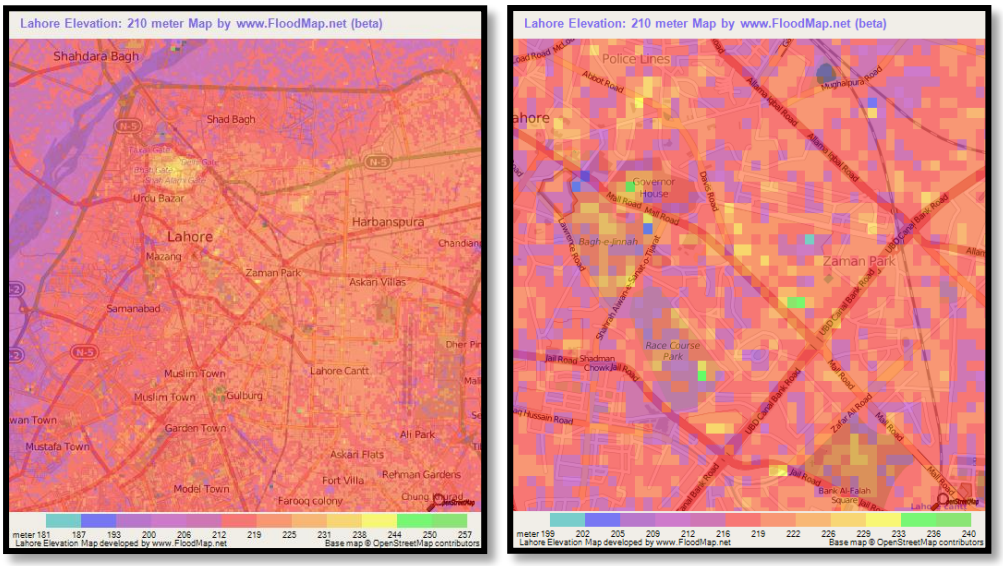


Figure 10: Topography of District Lahore

Lahore plains are most probably underlain by the Potwar stratigraphy, but it would be deeply eroded. Lahore is located just north of the NW-SE running Sargodha high, where

the sedimentary rocks may also be truncating against the high. Moreover, very thick

alluvial and older fluvial deposits (Recent to Miocene) before older eroded rocks are also

encountered. The geotechnical properties and mineralogical composition of the soil, das established during various studies / boring of tube wells for water supply by WASA/LDA confirm that the Lahore soil is composed of silty clay. The major mineral composition for Lahore soil is Quartz, Muscovite and Clinochlore, which shows that

the alluvial deposit received sediments from metamorphic origin. In general, subsurface stratigraphy at the site consists of three basic lithological units as given below:

• Lean Clay/Silty Clay

• Sandy Silt/Silt

• Silty fine Sand/fine Sand

These soils are the alluvial deposits of the recent geologic times. The subsurface stratigraphy is as discussed below:

• The first soil unit of brown silty clay/lean clay forms the topsoil cover at the site at all the locations and generally continues to a depth of 1 .0 m- 3.5m below top of ground. This stratum contains trace fine sand and trace to little concretions at places. It is present in a soft to a stiff state of consistency and has low to medium plasticity.

• The second soil unit of brownish grey sandy silt/silt underlies the upper silty clay/ lean clay stratum. This layer has a thickness of 1.0 to 3.0m and is present in a firm state.

• The third soil unit of brownish grey non-plastic fine silty sand underlies the silt/silty sand stratum. It is present in a loose to medium-dense state.

The lithological distribution of soils consists of slightly cohesive, generally firm to stiff silty clay lean clay from 1.0 to 3.5m depth, followed by firm to stiff sandy silt/silt of 1.0 to 3.0m thickness in turn followed by medium dense silty fine sand. Groundwater is present at a depth of 4.5 to 5.0m below top of ground. The subsurface generally appears suitable for supporting light to medium loads through spread foundations placed at 1.0 to 2.0m depth. Besides, some isolated weak spots are also expected, which will require special measures to be adopted.

4.4.2 Climate

Purposed project site is located in District Lahore and has distinct seasons marked by wide variation in temperature. The coldest month is January in which the mean maximum temperature is 19.4 °C and the mean minimum temperature is 6.6 °C. June is the hottest month with the mean maximum temperature near 39.8 °C and the mean minimum temperature as 27.4 °C.

The average annual rainfall from 2010-2018 in Lahore works out to be 126.16 mm. Nearly 70% of it received in the form of high intensity showers during the monsoon (July, August, September) and the remaining in winter. The yearly variations are considerable.

The most humid period is in month of February with average humidity of 53.125 % and the least humid period is in the month of May with average humidity of 18.875 %. The average monthly humidity of Lahore region form last 9 years (2010-2018) recorded is 35.25 %.

During cold seasons of the year northern winds prevail and during hot seasons southern winds. Monthly mean velocity of the wind (Knots) taken for the period 2010-2018 is 5.46.

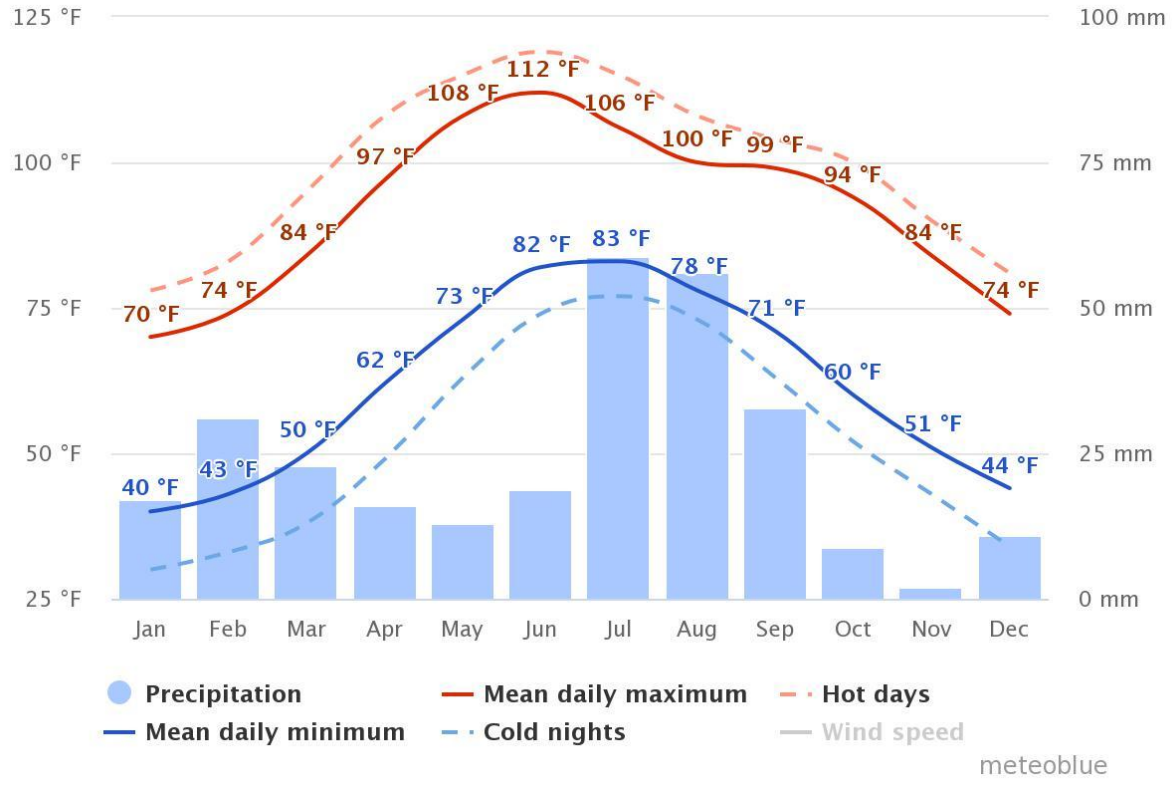


Figure 11: Average temperatures and precipitation

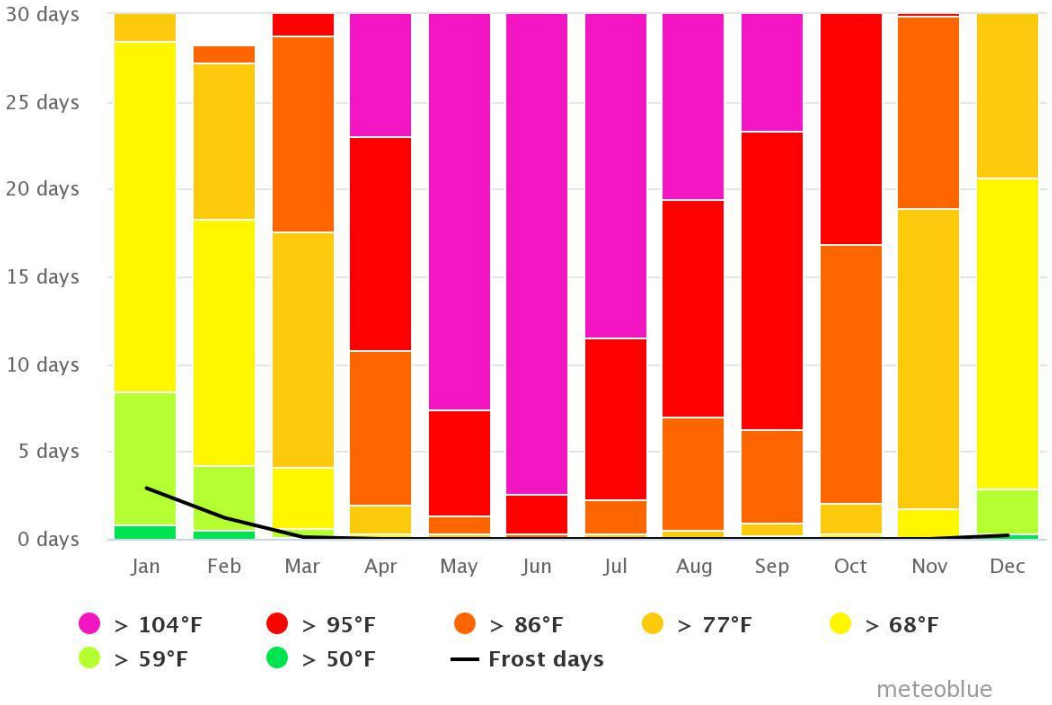


Figure 12: Maximum Temperature of Lahore

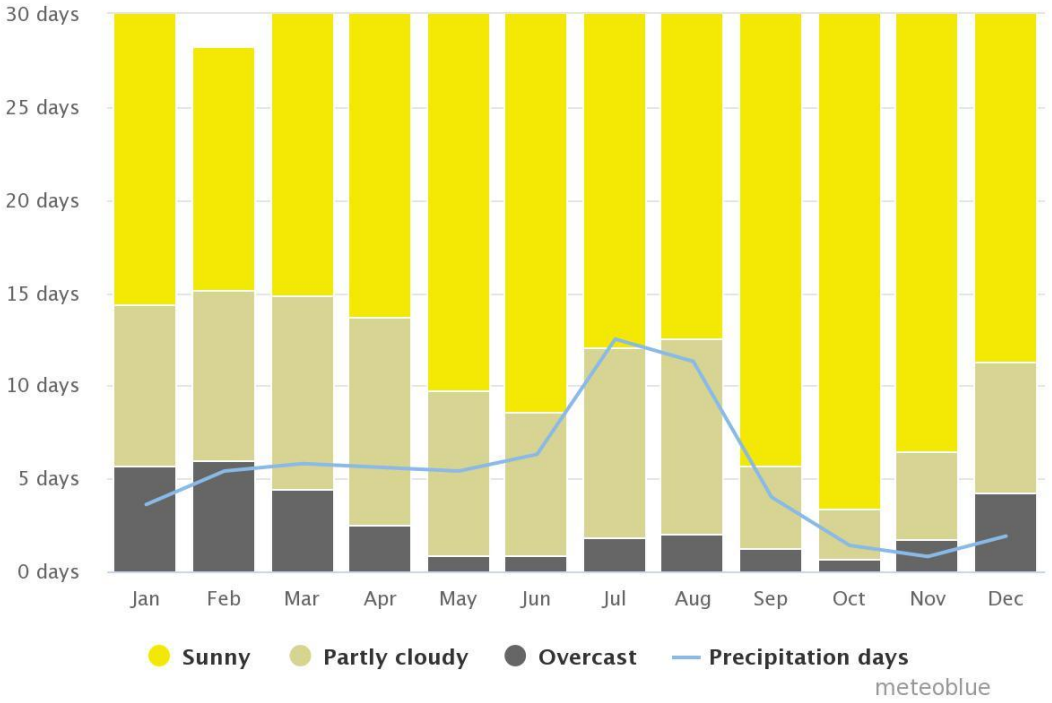


Figure 13: Cloudy, sunny, and precipitation days

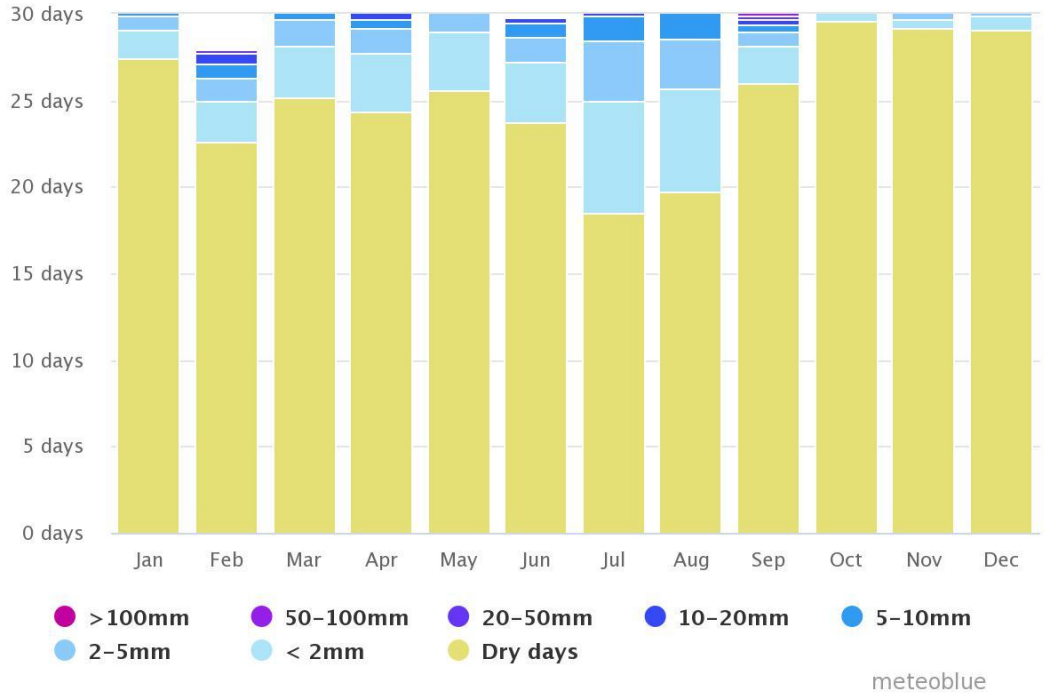


Figure 14: Average Precipitation of Lahore

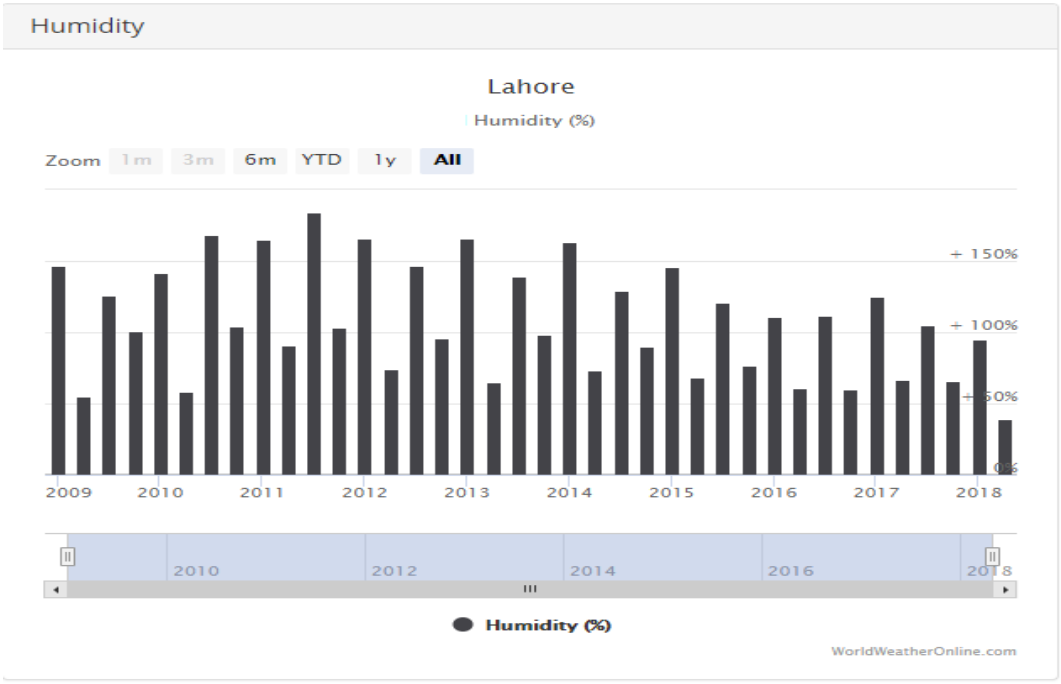


Figure 15: Average Humidity of Lahore Region

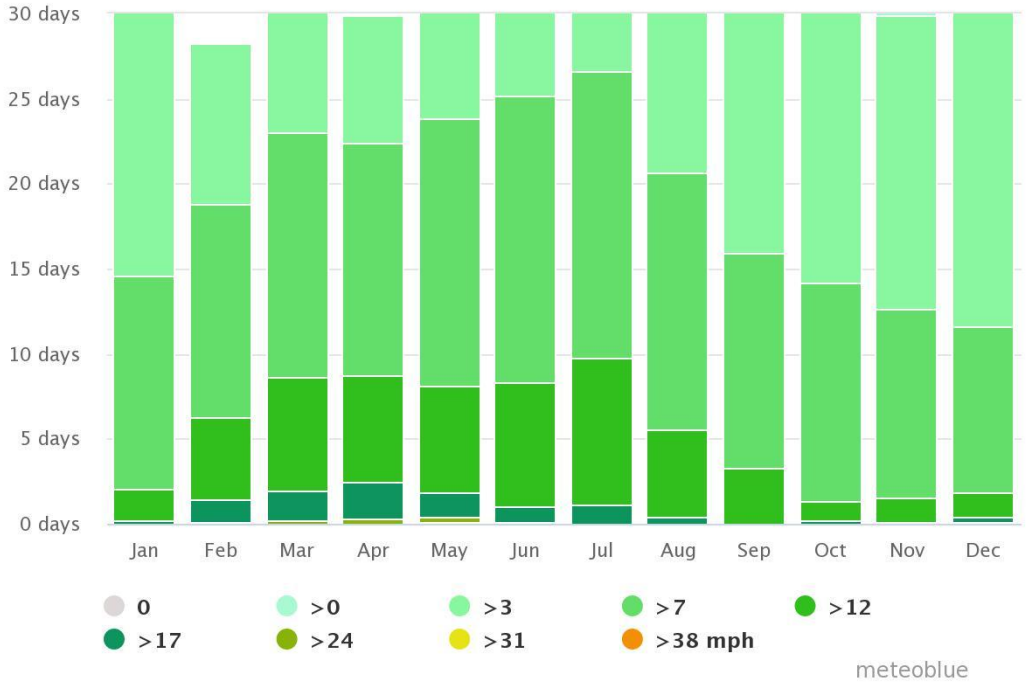


Figure 16: Average and maximum Wind Speed of Lahore Region

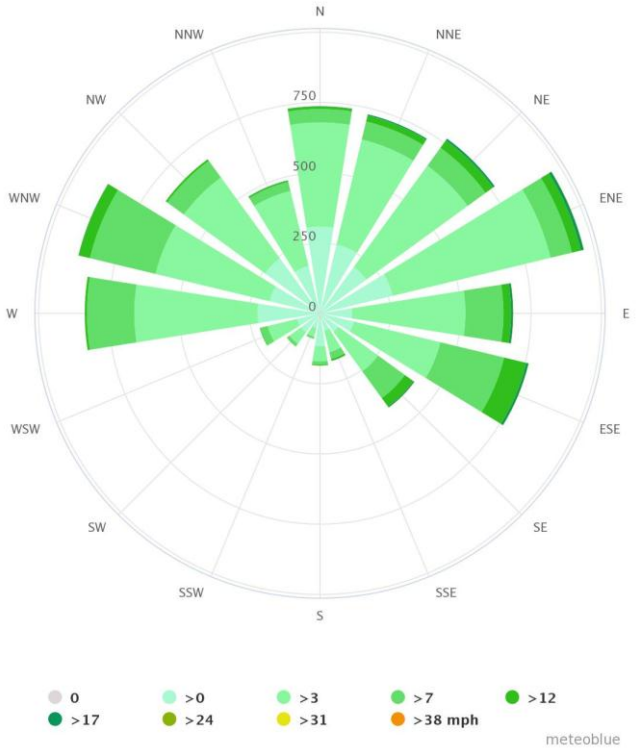


Figure 17: Wind Rose Diagram of Lahore

The wind rose for Lahore shows how many hours per year the wind blows from the indicated direction. Example SW: Wind is blowing from South-West (SW) to North-East (NE).

4.4.3 Hydrology

The aquifer under Lahore area is composed of unconsolidated alluvial sediments, consisting of sand, silt and clay in different proportions. The chief constituent minerals are quartz, muscovite, biotite and chlorite, in association with a small percentage of heavy minerals. The sediments have been deposited by the present and ancestral tributaries of the Indus River during Pleistocene-Recent age. The sedimentary complex has a thickness of more than 400 meters. The shifting course of the tributaries in the area has impregnated the heterogeneous character to the thick sedimentary alluvium. Therefore, the geological strata have little vertical or lateral continuity. In spite of their heterogeneity, the alluvial sediments constitute a large aquifer, which on regional basis behaves as an unconfined homogeneous aquifer (Greenman et al., 1967). The individual lenses of silt and clay do not impede the flow of groundwater, considering long-term pumping. Lahore aquifer is highly transmissive, with hydraulic conductivity variation between 25 m/day to 70 m/day. In spite of heterogeneous nature of alluvial complex, groundwater occurs under

water table conditions.

Regional Flow Pattern and Condition of Groundwater

The regional groundwater flow in the area is from northeast, the Jammu and Kashmir foothills which are at higher elevation, towards the southwest along the general slope of the area.

The previous studies and behavior of existing shallow and deep tube wells in the area have shown that in spite of local variation, aquifer overall behaves as a single homogeneous water body and 73 % of the total consists of sand. This condition is during the monsoon season, when the water table is the high and the annual fluctuation is reported not more than 10 feet.

Before the introduction of controlled irrigation system in Punjab, the water table was deep towards the center of Doabs and was shallow along the rivers. After the introduction of controlled irrigation system in the region, water table started rising as a result of leakage/seepage from irrigation canals and infiltration from irrigation applications on crop fields. As a result, the area became water logged until about 1960

when a quasi-equilibrium state was reached, controlled in part, by evapotranspiration and drainage.

4.4.4 Groundwater

Ground water quality is fresh (defined as acceptable in terms of its salinity). Raw water abstracted from the deep tube wells is believed to be essentially bacteria free. The water quality in the upper 50 meters zone of subsoil is generally brackish. For city's drinking purposes water is abstracted from groundwater aquifer by means of tube wells located throughout the city. The quality of water is generally adequate for direct consumption. About 83% of city population is consuming groundwater for drinking purposes.

Groundwater is available at a depth ranging between 15 to 23m below the natural surface level. Deep groundwater from a depth of about 210m in the vicinity of the Project Area is being extracted for meeting the domestic and commercial water demands in nearby areas. Adequate quantity of good quality groundwater is available below a depth of 50m. Water consumption varies significantly and its variation as of industrial units. Usual water consumption pattern for industrial units and data collected from the prospective industrialist will form basis for total water demand. According to Master Plan-2030 for the city of Lahore, the mean average decline in ground water is about 2.03 feet per year.

4.4.5 Geology / seismology

Lahore lies on the alluvial plain called Bari Doab. Doab is a local word for area between rivers. Bari Doab is a part of the Indo-Gigantic alluvial plain formed by the Indus River and its tributaries. It is bounded by Ravi and Chenab rivers in the northwest and west and by Sutlej River in the southeast. Northeastern boundaries of Doab lie near the foothills of the Himalayan Ranges. The Bari Doab is covered by Quaternary alluvium which overlies semi-consolidated Tertiary rocks or Metamorphic and igneous rocks of Precambrian age. Except for a small area in the northeastern part of Doab where basement rock was encountered no information is available at present regarding the distribution of Tertiary and Precambrian rocks in the Doab.

The project site is located in Punjab which is a vast plain of alluvial material, deposited by Indus basin and five main rivers crossing the Punjab Plain. Thickness of alluvial

deposits is thought to be more than 300 m which are underlain by the basement rocks of the Indian shield. The project site falls in the Punjab plain which shows low to moderate level of seismicity. The project region has also been subjected to severe shaking in the past due to earthquakes in the Himalayas. The epicenters of low to moderate magnitude earthquakes recorded in the Punjab Plain are associated with the subsurface fractures in the basement rocks which are concealed by the thick alluvial deposits. The known main active fault near Lahore is the Main Boundary Thrust (MBT) which passes at a distance of about 180 km towards northeast along the Himalayan front.

The Project Area does not have any valuable minerals. Although, scientific/in depth, investigations haven't been carried out, yet the surveys conducted have failed to discover any minerals worth the name till to- date.

Probabilistic seismic hazard assessment recently carried out for Lahore area as part of the revision of seismic provisions of the Building Code of Pakistan shows that the project area falls in Zone 2A. Seismic zone of Pakistan is shown in figure 4.1. It is therefore recommended that the project structures should be designed to cater the requirements of Zone 2A of Building Code of Pakistan (2007). Based on the evaluation of tectonic setting and seismicity of the project region, the important project structures are designed to withstand a horizontal peak ground acceleration of 0.15g with 10% exceeding probability in 50 years.

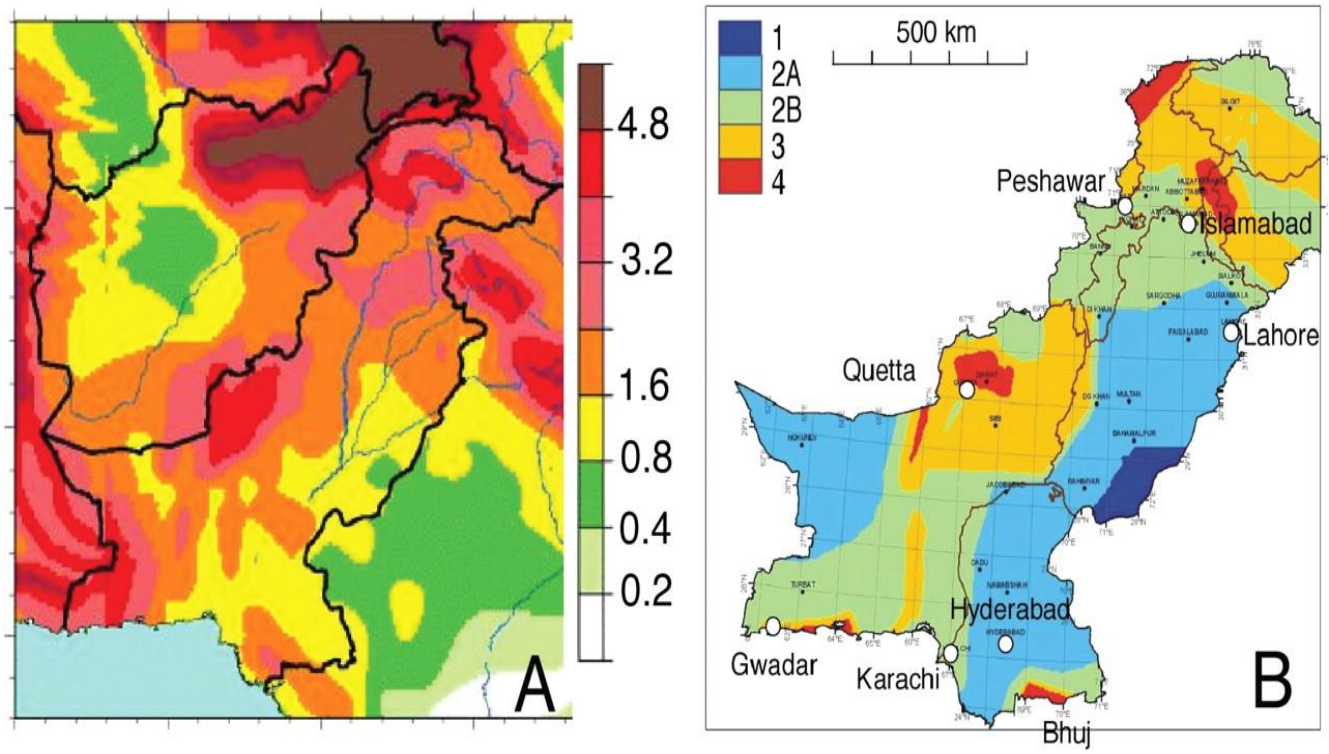


Figure 18: Seismic Zone of Pakistan (Geological Survey of Pakistan)

4.5 Description of the biological environment

The project area neither contain any forest nor falls in protected area or archaeological site and so no jurisdiction on the proposed sire area of the relevant legislations.

4.5.1 Flora

The project area is surrounded by self-developed industrial land, and does not support rare, endangered or threatened plant species. Plant species present in the site are given in the following table

Sr. No.	Local Name	Biological Name
1.	Kekar	Acacia nilotica L
2.	Sheesham	Dalbergia sissoo roxb
3.	Mango	Mangifera indica L
4.	Phulai	Acacia modesta wall
5.	Amaltas	Cassia fistula L
6.	Dharek	Melia azedarach L
7.	Bohar	Ficus benghalenses L
8.	Pepal	Ficus religiosa L.
9.	Kala toot or mulberry	Morus nigra L.
10.	Eucalyptus	Eucalyptus camaldulensis

11.	Guava	Psidium guajava L.
12.	Jaman	Syzygium cumini L.
13.	Pomegranate	Punica granatum L.
14.	Bair	Ziziphus jujube mill.
15.	Rose	Rosa indica L.
16.	Sumbal	Bombax ceiba L.

some plants are ornamental like Alastonia, Golden Ficus, green Ficus, Dronta Weeds, and Palms etc. these are the tree species that are generally planted along the margins of fields. Among the above-mentioned tree species mostly are used for landscaping purposes in houses some plants are used as biomass in homes near the selected site.

4.5.2 Fauna

Only few common animals are found near the project site like dogs, cats, rodents like squirrels, rats, mice and bats. Common species of birds found include the common house sparrow, crow, pigeon, dove, yellow and white eyed mynas.

4.6 Socioeconomic Resources and Quality of life values

In order to assess the present socio-economic and socio-cultural conditions of the project area, a survey was conducted. For this purpose, base line data was collected from few commercial and residential areas adjoining to the purposed site. Interviews and social surveys were conducted to assess the present socio-economic and cultural feature of the area.

4.6.1 Population and communities

Mostly community around the purposed project area is the semi-urban. Most of them have their own business. Some of them have private jobs in different industries present in the industrial Area, agriculture and livestock profession. Only a few are government

employees. Punjabi is the predominant language being spoken near the purposed project site, representing 55 % of the population, followed by Urdu and Pashto spoken by 40 % and 4.8 %. Sindhi is spoken by 0.2%.

4.6.2 Infrastructure

The project area is situated near Main Raiwind Road, Lahore and provides round the clock transport access. All the other areas are connected with metaled roads. Buses, motorcycle rickshaws, motorcycles, vans and pickups provide very convenient mode of transportation throughout the area. All bounded area has electricity provided by LESCO along with telephone and natural gas facilities. Lahore has well developed drainage system which fulfills the requirement of the town in rainy season as well as in dry weather. The project site area will also be provided with the modern facilities like electricity by LESCO, natural gas by Sui Northern gas pipelines limited, phone facilities by Pakistan Telecommunication Company limited, and very well-designed drainage system along with a septic tank for primary treatment of sanitary water before throwing it to public sewerage. No surface water is available to the area and only source of water to the area is groundwater, which is extracted by means of motor turbines, tube wells and hand pumps

4.6.3 Educational institutions

Basic primary level education is available. The private education schools also exist near the project site. The project area has privileged of big colleges and universities.

4.6.4 Transportation

The project area is situated on Sharif Medical Complex - Manga Road which is approx. 60 feet wide and provides round the clock transportation access. Transport services include buses, trucks, vans, cars, pickups, motorcycles, rickshaws, and bicycles. For railway services, one can go to Lahore Railway station from where rail service is available throughout the Pakistan

4.6.5 Power sources and transmission

Electricity services are provided by Lahore electric power company to the area and it shall provide same services to the proposed project as it is the only authority which deals with the electric power sources and their availability to the expected area.

4.6.6 Agricultural and mineral development:

The project area lies in the agricultural zone. Land holdings are very small. Agriculture mainly depends upon canal water. Underground water, where available of irrigation quality, is used for agriculture purpose through tube wells.

4.6.7 Public health

The medical facilities are available near the project site area as few very good hospitals are situated in nearby residential area, whole area is full of clinics and hospitals thus providing very good medical facilities to the people of area.

4.6.8 Archaeological and cultural sites

No Major archaeological sites are observed in the vicinity of proposed project.

4.6.9 Gender analysis

The section describes the importance of role of women in the project area. Responsibilities of women in the area belongs to their household activities like cooking the daily meal, dishwashing, feeding and milking the cattle, cloths washing, bringing up the children as well as working in the fields. In the area, awareness regarding formal education is prescient and approximately every child in the area especially girls are getting education from the educational institutions. This is also because govt. of Punjab has made formal education totally free and also provides free of cost course books to the students till their matriculation. Majority of the working-class women are teachers in govt. school as well as in private institutions while remaining are doctors and nurses in the hospitals. The female population is found to be 49% of the total population of Lahore district.

4.8 Quality of Life Values

Socio-Economic Questionnaire and Environmental Checklist were used as survey tools by the Central Environmental Services survey team to collect desired information. Most of the respondents had the basic social facilities such as; basic health facility, electricity, water supply, roads, rail, public and private transportation to sustain life. Most of the respondents were working with the agricultural, livestock, doing their own business, shopkeepers and working as the labor in the nearby

industries. The common diseases observed in that area were Diarrhea, cough diabetics and heart diseases.

4.8.1 Occupation of Respondents

Majority of the respondents (26%) belongs to the business, 33% have their own business, 10% daily wagers, 13% attached with Govt. employee, 15% shopkeepers and remaining 18% are private employees. During survey, efforts were made to interact with people representing all walks of life. The detailed graphic representation of occupational status is given below:

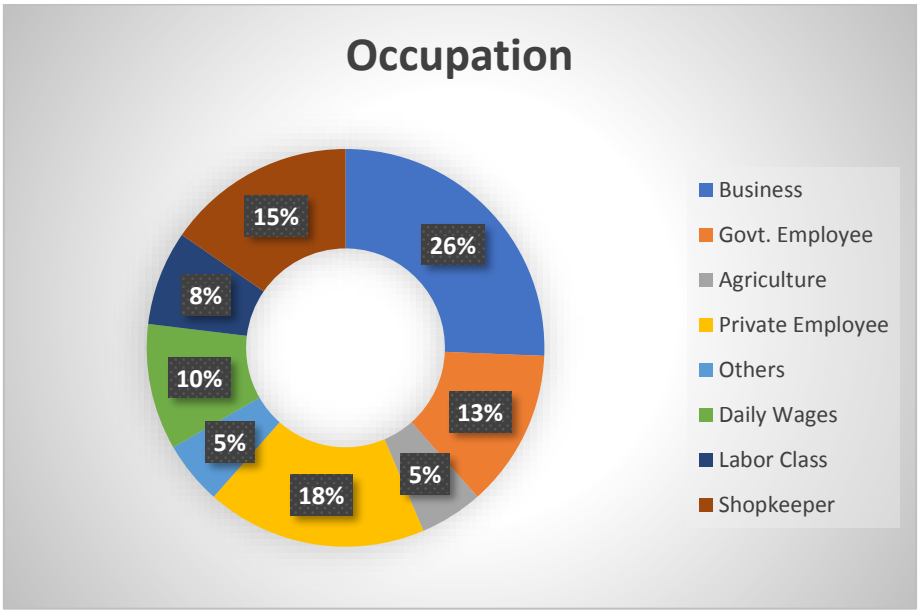


Figure 19: Occupation of Respondents

4.8.2 Personal Income

Based on the sample survey results, as the figure shows that nobody was earning less than 20,000 rupees, 69% of respondents fall within the income range of 20,000 – 25,000, 23% respondents earn 30,001 – 40,000 while only 8% of the respondents earn within the range of 40,001 – 45,000.

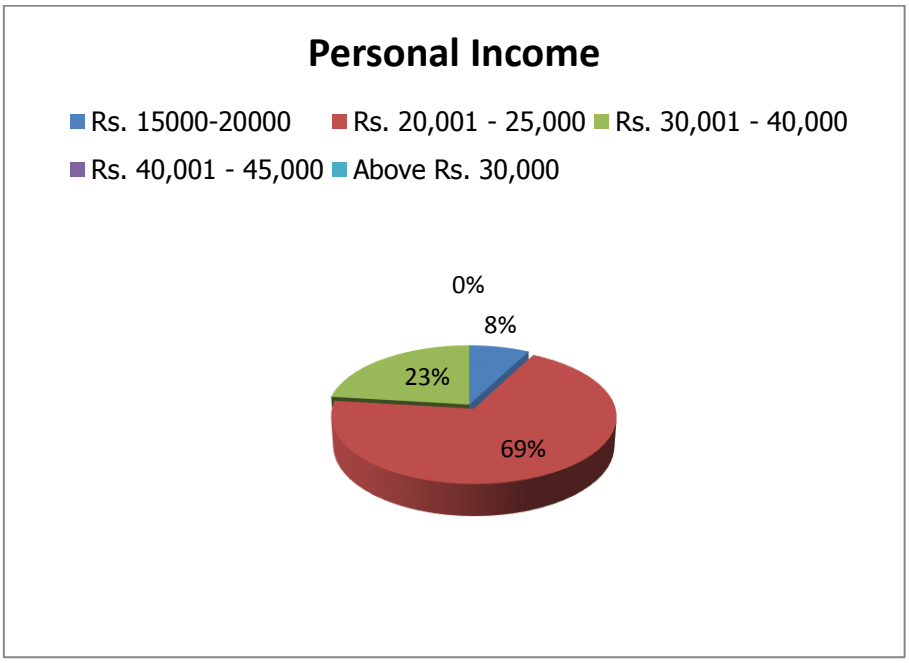


Figure 20: Personal Income

4.8.4 Facilities Available

Facilities available at the houses, shops and factories are depicted here. It shows that electricity, water supply, telecommunication, sewerage, gas supply and every other routine facility is available in study area.

4.8.5 Literacy Rate

From survey results, it was found that 14% of the studied population was illiterate, 7% was up to primary level, 43% studied up to middle level and only 36% of the respondents studied up to higher secondary level.

4.8.6 Common Diseases

According to the survey the common diseases recorded in the project area were, Diabetes, Fever, Hepatitis, Hypertension, stomach problems, Malaria, Typhoid, Nephritis and Diarrhea**.**

4.8.7 Favor for the Project

Respondents were inquired about their views regarding the proposed project. Out of total 14 respondents 70% of the respondents knew about the project whereas, rest of the respondents doesn't have prior knowledge of the project planning and

commencement. Almost 85% respondents of were in favor of the establishment of Plastic pipe manufacturing unit in their vicinity as this will increase the employment opportunities and raise the overall socio-economic status of the area.

Table 10: Concerns and Solutions

Main Theme	Concerns	Solutions
Employment	The hiring during operational phase, locals should be considered realistically	The proponent will try to engage local people on priority basis
Environmental Impact	Air pollution, improper handling of wastewater and mitigation of noise impacts	• Based on the result of ambient air and noise sampling, necessary mitigation measures will be adopted • To mitigate the impact of the contamination from the generation of wastewater, waste will be handled properly • To control the air pollution suction hood consisting of bag-house filters and ID fans will be installed • Tree plantation will be carried out in the designated green space
Social Impact	Public nuisances issues may arise due to the spread of diseases in the case of improper disposal of the solid waste and the air emission may cause issues	• Proper handling of the waste such as segregation and composting of the solid waste will be carried out to reduce the public nuisance and to improve the public health

		• To control the air pollution suction hood consisting of bag-house filters and ID fans will be installed • A registered will be maintained to register the complaints of the local community

4.8.7 Community Issues

Community was asked about the burning issues they are facing. The majority of respondents complained about lack of sewerage system, solid waste management system, lack of safe drinking water supply, proper health and educational facilities.

4.9 Lab Reports of Environmental Analysis

Testing of different parameters was done from a certified laboratory named SEAL to check the quality of different environmental parameters. The copy of the lab reports of these parameters (ambient air analysis, water quality analysis and noise) is attached at Annexure of this EIA Report.

4.10 Suitability of Site:

Comprising all assessment of above baseline data there will be no significant ecological/ environmental impact expected in and around the present selected project site, hence it is suitable for the proposed project.

5. PUBLIC CONSULTATION AND INFORMATION DISCLOSURE

Public consultation refers to the process by which the concerns of local affected persons and others who have a plausible stake in the environmental impacts of the project or activity are ascertained with a view to taking into account all the material concerns in the project or activity design as appropriate. According to the IEE and EIA Review Regulations, public consultation is mandatory for any socio-environmental study.

5.1 Proponent's Environment Management Team

Following are the designated roles and responsibilities of the employees involved in the monitoring and management of the adverse impacts and will be appointed after operation of project starts.

Roles and Responsibilities		
Sr#	**Concerned Persons**	**Duties**
1	The Project Manager	Following will be the responsibilities of the Project Manager • Ensure that the contractor is aware of all specifications, legal constraints, standards and procedures pertaining to the project specifically with regards to environment. • Ensure that all stipulations within the EMMP are communicated and adhered to by contractor(s) • Monitor the implementation of the EMMP throughout the project by means of site inspections and meetings. This will be documented as part of the minutes of the site meeting documents • Ensuring project execution within defined budget and timelines • Conducting regular check of the project status and meetings with project team

		• Provide support and guidance to project team as and when needed • Project Manager is expected to continually monitor and improve the overall performance of their operation
4	HSE Manager	In addition to the health and safety responsibilities held by staff, managers and supervisors must do whatever is reasonably practical to ensure that both the workplace and the work itself are safe. This includes: • Ensuring that staff are appropriately trained and supervised • Identifying, assessing and managing health and safety risks • Consulting with workers (including staff, affiliates and contractors): i. Health and safety risk assessments ii. Decisions are made about the measures to be taken to eliminate or control these risks iii. Health and safety risk assessments • Implementing health and safety risk management programs relevant to their operations, teaching, research and consulting functions and work environment • Reporting (to the Human Resources Unit), investigating and responding to all hazards, accidents, incidents and taking action to control the risk • Assisting with the development, implementation and maintenance of a return to work program for injured staff. • Be fully conversant with the EIA and conditions of its approval • Be fully conversant with the EMMP

		• Be fully conversant with all relevant environmental legislation, policies and procedures, and ensure compliance • Convey the contents of this document to the contractor site staff and discuss the contents in detail with the Project Manager and Contractor • Undertake regular and comprehensive inspection of the site and surrounding areas in order to monitor compliance with the EMMP • Take appropriate action if the specifications contained in the EMMP are not followed • Monitor and verify that environmental impacts are kept to a minimum, as far as possible • Review and approve construction methods, with input from the Site Manager, where necessary • Ensure that activities on site comply with all relevant environmental legislation • Compile progress reports on regular basis, with input from the Site Manager, for submission to the Project Manager, including a final post excavation audit • Liaise with the Site Manager regarding the monitoring of the site • Report any non-compliance or remedial measures that need to be applied • All environmental problems arising on the construction area will be reported to the Site Manager by the Environmental Manager. Reports on such problems will be submitted to the Project Manager by the Site Manager

5.2 The Responsible Authority

Impact assessment survey and public consultation sessions held with different stakeholder groups that may be impacted by the proposed project commencement. The consultation process was carried out in accordance with the guidelines laid by Punjab-EPA. The objectives of this process were to:

- **Share information with stakeholders on proposed project installation and operation**
- **Access the impacts on the physical, biological, and socioeconomic environment**
- **Understand stakeholder concerns regarding various aspects of the project commencement**
- **Find out valuable suggestions by the stakeholders to improve the proposed project design**
- **Understand the perceptions, assessment of social impacts and concerns of the affected people/communities of the project area**
- **Find out the awareness level and situation of acceptability to identify any issues for the implementation of the proposed project**
- **Invite people to express their views about the positive/negative impacts on their lifestyles and environment**
- **Disclose information about contact offices/officers for any complaints/queries**

It is envisaged, there will be no social impact being foreseen due to the construction and operation of Arsons Pharmaceutical Industries (PVT) Ltd. at the proposed location. This EIA Report includes all the comments, which were taken into account during the social survey and preparing the definitive development concept for the installation and operation of Arsons Pharmaceutical Industries (PVT) Ltd. in G. Public consultation performas is attached as Annexure of this EIA Report.

5.3 Objectives of Consultation

Public consultation plays a vital role in studying the impacts of the proposed project on stakeholders in successful implementation and execution of the project. It provides an opportunity to exchange knowledge with the beneficiaries and affected parties. Referring particularly to a project related to environmental assessment, involvement of the public is all the more essential, as it leads to better and more acceptable decision-making. The overall objective of the consultation with the stakeholders is to help verify the environmental and social issues, besides technical ones, that have been presumed to arise and to identify those which are not known or are specific to the project. In fact, discourse with many who have thoroughly observed the site conditions in the pre-development phase, goes a long way in updating the knowledge and understanding.

5.4 Identification of Stakeholders

All the people who are directly or indirectly affected or concerned with the project are the stakeholder. Besides the living population of the surrounding areas, some other stakeholders were identified and contacted which enlisted below. They are the key players including; shops, public and government offices, schools, university, hospitals, hotels, international agencies and the NGOs. Not only published material, brief or other literature were obtained on request, but also noted their views and the concerns, in an official capacity as well as on the personal basis. Following stakeholders are identified for this project:

Project Affected Persons (PAPs) include the settled families, either property owners or the tenants, businessmen (big, shopkeepers, vendors, etc.), employees of the commercial entities. PAPs are of two types, for instance:

5.4.1 Direct Stakeholders

No disturbance in the local community is being foreseen due to the installation of the aforesaid project as the community is at a safe distance. No property loss is being envisaged due to the construction of the Arsons Pharmaceutical Industries (PVT) Ltd.

5.4.2 Indirect Stakeholders

Indirect impact will occur on those who are living or doing business within a Project Area of Influence (AOI). In the case of the proposed project, the citizens of nearby small towns) will get opportunities of being employed. So, in the early development stages and during the operational phase the people will be benefited due to the installation of the Arsons Pharmaceutical Industries (PVT) Ltd.

5.4.3 Other Departments and Agencies

Following departments are related to the project in public consultation:

- **Government agencies responsible to deal with the project related activities**
- **Government Agencies directly, indirectly or widely involved in the execution and monitoring of the proposed project**
- **Government departments such as TMA and Planning & Development Department, Forest Department, Agricultural Department Industrialist**

around the estate and working on the other development activities are considered as indirect stakeholders

- ➔ **Workers of political, cultural, religious or social scientific bodies, directly or indirectly related to the project**

5.5 Public Disclosure

Public disclosure is the outcome of all such activities where the public is involved at least in the information sharing process. This is an integral part of the process. So, before the proponent applies for NOC to the Punjab-EPA, this disclosure will be distributed properly among all stakeholders. It is the responsibility of the proponent and the consultants to display a public disclosure document in prominent places where community has easy access.

5.6 Consultation Process

Information disclosure, public consultation and discussion regarding the various aspects of the project with the people of the area are necessary. This process is intensified during the EIA Studies, and separate rounds of public consultations were held. Surveys were carried out in order to investigate physical, biological and socioeconomic resources falling within the immediate AOI of the project. Primary data collection included:

- ☑ **Data collection regarding the socioeconomic condition of the study area**
- ☑ **Pre-testing of socioeconomic survey tools in the field**
- ☑ **To consult the locals for collection of information on biological environment**

Various meetings with the stakeholders were held the following objectives:

- ➔ **Share information with stakeholders on the proposed project and expected impacts on community in the vicinity of the project**
- ➔ **Understand stakeholders' concerns regarding various aspects of the project, including the existing condition of the upgrading requirements, and the likely impact of construction and operation activities**
- ➔ **Provide an opportunity to the public to influence the project design in a positive manner**
- ➔ **Obtain local and traditional knowledge, before decision making**

- ➔ **Increase public confidence about the proponent, reviewers and decision makers**
- ➔ **Reduce conflict through the early identification of controversial issues, and work through them to find acceptable solutions**
- ➔ **Dissemination of information through discussions, education and liaison**
- ➔ **Documentation of information narrated by the stakeholders and mitigation measures proposed by the stakeholders**
- ➔ **Incorporation of public concerns and their address in the EIA; and eliciting their comments and feedback**
- ➔ **Create a sense of ownership of the proposal in the mind of the stakeholders**

5.7 Environmental Practitioners and Experts

Officers of government departments and industries were consulted by the socio-environmental team of the consultants and concerned details about the project were noted down through personal interviews, group meetings, etc., in their offices, for instance. List is attached as an annexure.

5.8 Affected and Wider Community

In addition, to the use of direct methods to evince the response of the various stakeholders in the population of the study area was ascertained by conducting a sample survey, through specially formatted questionnaires (attached in the Annexure of this EIA Report). Questions posed to the public were related to creation of possible impacts, adverse impacts and beneficial impacts, including; employment opportunities, income generation activities, change in living standards and provision of the amenity.

- ☑ **Disclose the proponent plan of the construction of the proposed facility**
- ☑ **To share information on the design and specifications of proposed project works**
- ☑ **To analyze the expected impact on the socioeconomic environment**
- ☑ **To understand their concerns regarding various aspects of construction and operation**

5.8.1 Views, Concerns and Suggestions of Various Stakeholders

Community showed a lot of concerns; a few are being mentioned here:

- **Removal of shrubs and trees should be avoided to the extent possible**
- **The project will become the source of income for local to earn their livelihood easily and honorably**
- **The area will become further industrialized**
- **For the solid waste management and waste disposal, proper disposal techniques should be adopted**
- **Employment opportunities will be generated, and locals should be hired on the priority basis**
- **The air pollution is one of the major impacts of the proposed project, so ambient air quality should be monitored regularly.**
- **Water spraying/sprinkling should be done on the regular basis during construction phase to avoid dust emissions**
- **Removal of shrubs and trees should be avoided to the extent possible**
- **Good relations with the local communities will be promoted by encouraging Contractor to provide opportunities for skilled and unskilled employment to the locals as well as on-job training**
- **The contractor should prefer hiring local labor from adjacent nearby villages**
- **Indigenous tress around the facility should be planted to control air pollution and as the compensation**
- **Noise reducing barriers should be installed to reduce noise pollution**

Concerns

- ☑ **Workers should be hired from local community**
- ☑ **Proper disposal of solid waste should be practiced**
- ☑ **Indigenous tress around the facility should be planted to control air pollution**
- ☑ **Removal of shrubs and bushes should be avoided to the extent possible**

5.8.2 Addressing Public Concerns

The best mechanism of effective communication between the community and the proponent is the by the nomination of the representative of the community and all the issues/concerns must be recorded for future reference. This representative may be the member of the Grievances Redressed Committee (GRC).

a. Grievances Redressed Committee

Grievances Redressed Committee (GRC) will be formulated by the proponent to address the concerns of the locals during the construction phase. The main role of the GRC will be to resolve the issues of the community associated with the proposed project, if any.

5.9 Acceptance Level of the Project

The opinions of the respondents were noted during the public consultation. The majority of respondents (88%) of were in favor of the proposed project. They expect that installation of the proposed unit will also increase the economic value of local assets. According to them the proposed project will boost the employment opportunities, mobility access to resources and social amenities.

6. POTENTIAL ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES

6.1 General

The potential environmental impacts related to the proposed project have been studied related to design, location, construction and operational stages of the Project. Environmental protection measures are recommended to eliminate adverse environmental impacts or to reduce them to an acceptable level within the prevailing legislative and regulatory framework.

Impacts are evaluated on the basis of magnitude, immediacy and sustainability. Evaluation criteria are as follows:

Magnitude

Type of impact (direct, indirect, cumulative)

- Immediacy

Temporal extent (during construction, after construction)

- Spatial extent (local, widespread)

Sustainability and Reversibility

- Mitigability (fully, partially)
- Monitoring (fully, partially)

The basic purpose of mitigation measures is to reduce the impacts of the establishment of pharmaceutical manufacturing unit on the socio-environment up to the maximum possible extent. The mitigation measures are suggested based on the following parameters:

6.1.1 What is the problem?

The proposed project is of manufacturing of pharmaceutical industry which are organic in nature. The nature of the land is open land. The project is vacant plot in self-developed industrial. In addition, to the noise and fugitive dust emissions during the development phase solid waste management and disposal issues may arise along with wastewater disposal issues. There are few minor impacts associated with the operation of manufacturing unit includes the management of the municipal solid waste generated during the, raw-material storage which will be managed according to local practices of area.

6.1.2 When problem will occur and when it should be addressed?

The impacts from the establishment of pharmaceutical manufacturing unit will occur during the construction and operation due to the civil work. These issues included; noise generation, fugitive dust emissions, solid waste management, wastewater disposal, top-soil removal, Health and Safety issues and change in the geographic features of the area. These all problems should be addressed on-site where they are being generated, to avoid the residual or adverse impacts.

6.1.3 Where problem should be addressed?

The problem will be generated from site development and operation of the unit. So, it should be addressed on source i.e. at site within the same timeframe.

6.1.4 How the problem should be addressed?

Proper mitigations measures will be provided according to the nature of the impacts/problems. For example, against dust emissions sprinkling of water may be done on regular basis, for solid waste proper solid waste management and disposal practices may be adopted, to manage liquid waste proper treatment may be made before discharging into the receiving body. The change landscape is estimated to be quite minor and the removed topsoil may be used to reclaim the disturbed areas.

6.2 Ways of Achieving Mitigation Measures?

Following ways will be adopted to reduce the impacts of the pharmaceutical manufacturing:

6.2.1 Changing in Planning Design

There is no endangered and threatened species present in the project area. Moreover, there is not any human settlement or infra-structure that will be dislocated or dismantled due to the proposed project development. Hence, there is no need to change the design of project.

6.2.2 Improved Management and Monitoring Practices

The anticipated impacts had been reduced significantly by adopting better management activities, as it will be carried out for betterment of the society. While

environmental monitoring will be conducted on the regular basis to keep the sources of the air pollution, wastewater generation, noise and public nuisances in-check. Following practices that need to be adopted to reduce the impact significantly:

6.2.3 Replacement/Relocation/Rehabilitation

The proposed project is located in open land where there is no sensitive area, human population or preserved natural resource is present which could be impacted due to the commencement of the proposed project. No replacement, relocation and rehabilitation will be required for the commencement of the aforesaid project.

6.3 Impact Assessment Methodology

The impact assessment methodology for the installation of the pharmaceutical manufacturing unit is given below:

6.3.1 Screening of Potential Impacts

Based on site visit, observation, brain storming, provided information and social interviews, significant impacts were anticipated and evaluated. Then qualitative and quantitative (where possible) assessment of these anticipated impacts is to be carried out.

6.3.2 Identification of Mitigation Measures

After anticipation and screening of significant impacts, certain mitigation measures are to be provided in order to enhance benefits of project and reducing impacts. These measures can be classified as:

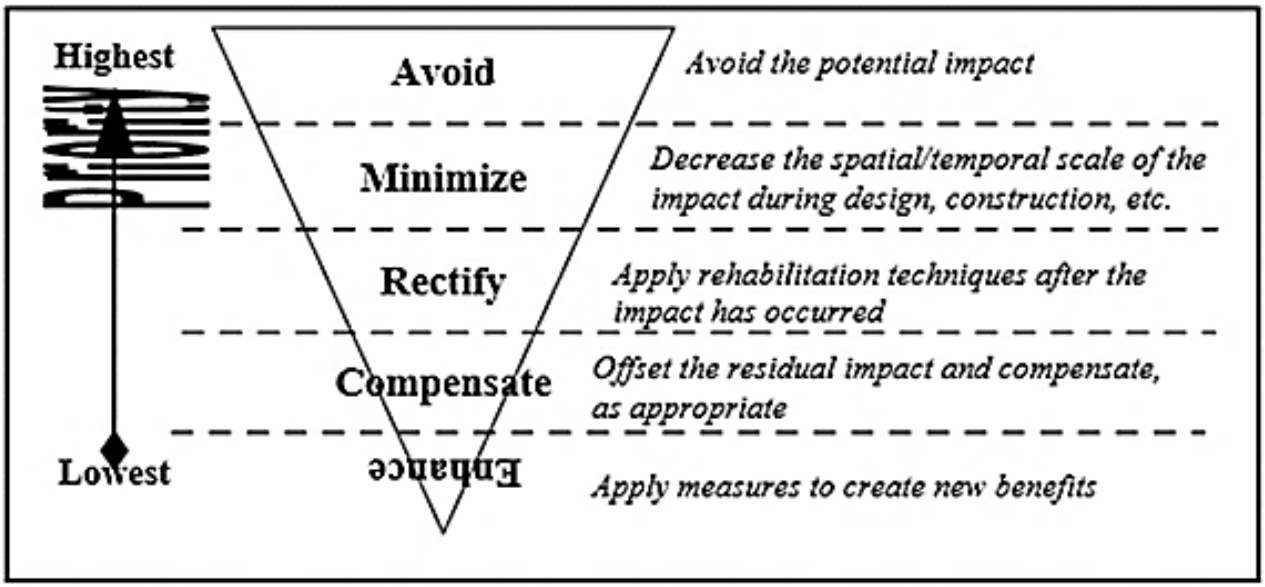


Figure 21: Impact Assessment Hierarchy

6.4 Impact Evaluation

Impact screening checklist and project impact evaluation matrix have been developed to evaluate the potential impacts of the establishment of pharmaceutical plant on the basis of set procedures as given in the environmental guidelines by Punjab EPA.

6.4.1 Methodology for Impact Evaluation

These tools have been used to identify the significance and magnitude of the impact as well as the nature, reversibility and extent:

1. **An Impact Screening Checklist**
2. **Project Impact Evaluation Matrix**

Following is given a brief description of assessment tools:

a) Impact Screening Checklist

The impact screening checklist is developed to screen out the potentially insignificant environmental and social impacts from the potentially significant adverse environmental and social impacts during planning & designing, construction and operational phases of the project. The objective of the impact screening process is to assess the significance of the issues related to the air, water, noise, soil, transportation, communication, the hazards and external constraints. The positive and

adverse impacts of the project during planning & designing, construction and operational phases are identified based on their duration, location, frequency, extent, significance and reversibility. Each activity impacts on various environmental parameters are given below:

Table 11: Impact Screening Checklist

Sr#	Environmental Component	Impact Characteristics												
		Duration		Location		Frequency		Extent		Significance			Reversibility	
		Long	Short	Direct	Indirect	Cont.	Intermittent	Wide	Local	Large	Moderate	Minor	Rev.	Irrev.
Beneficial Impacts														
	Employment Opportunity	◙		◙		◙			◙		◙		◙	
	Availability of Raw-Material	◙		◙		◙			◙		◙		◙	
	Appreciation in Land Value	◙			◙	◙			◙			◙		◙
	Energy Availability	◙		◙		◙			◙		◙		◙	
Adverse Impacts														
	Air Pollution		●	●			●		●			●	●	

	Wastewater		●	●		●			●			●		●
	Solid Waste and By-Products	●		●		●			●		●			●
	Health and Safety		●		●		●		●			●	●	
	Chemical Hazards		●	●		●			●		●		●	
	Physical Hazards		●	●			●		●			●		●
	Security Risks		●		●		●		●		●		●	

b) Project Impact Evaluation Matrix

The Project Impact Evaluation Matrix was developed by placing different environmental parameters that are likely to be affected by the proposed project actions, grouped into categories i.e., physical, ecological and socio-economic environment. For the impact assessment risk assessment methodology was used. Moreover, the risk assessment was done on the basis of project phases (planning & designing, construction and operation). A Project Impact Evaluation Matrix is attached as Table below:

Table 12: Impact Evaluation Matrix

Environmental Parameters	Impact Assessment during operational Phase
A: Physical	
Land Resources	
Soil Erosion and Contamination	0
Transportation	-1t
Solid Waste and By-Products	-2p
Land Use	NA
Air Resources	
Noise Pollution	-1t
Air Pollution	-2t
Dust Emissions	-1t
Water Resources	
Ground Water	-1p
Surface Water	NA

Wastewater	-2p
B : Ecological	
Flora	
Tree Cutting	+1p
Fauna	
Terrestrial Fauna	+1p
C: Socio-Economic	
Employment Opportunities	+3p
Land Value Appreciation	+2t
Availability of Local Raw-Material	+2p
Economic Uplift	+3p
D: Hazards	
Physical Hazards	-1p
Chemical Hazards	-1p
Health and Safety	-1p
Legends: 1= Low; 2= Medium; 3= High; 4= Extremely High; NA= Not Applicable; t= Temporary; p= Permanent; app= Applicable; 0= Negligible	

6.5 Impacts Associated with Project Location

The proponent has selected the site owing to the following reasons:

- There is no community or human settlement present on-site or in the project as the project site is located at self-developed industrial land.

- There is no fauna or flora belonging to an endangered species present on-site
- The site has accessible through road network i.e., connected to the main road via access roads
- There is no ecologically sensitive or declared protected area like; Reserved Forest, Fish Hatcheries, Wildlife or Game Reserves. Moreover, there is no socio-cultural significant structure (historical or archaeological site or religious structures; Masjid, temples, etc.) It can be concluded in view of these reasons that the selected site is best suited for the project and will not pose any adverse impact or threat on any component of the environment.

6.6 Design Related Impacts

The negative impacts related to design of the proposed project will not be significant as the area is self-developed industrial having open lands in its proximity / surroundings. The machinery is according to the latest state of art technology. In view of these considerations no environmental problems are foreseen in the context of design. However, the possible impacts of proposed project have been considered and their mitigation measures proposed as under:

6.6.1 Changes in Land value

After the development of proposed project, the land value of area will enhance. It will be minor positive impact.

Mitigation

Not required.

6.6.2 Seismic Hazard

The project is situated in minor damage zone. In this zone distant earthquakes with fundamental periods greater than 1.0 second may cause damage to structures.

Mitigation

The structure of the proposed project has been designed in such a way that the building may withstand moderate to large earthquakes.

6.6.3 Emergency response

There are always chances of earthquakes and other manmade disasters such as fires due to electrical short-circuiting, over heating etc.

Mitigation

The following mitigation measures will be adopted to minimize or eliminate the emergency situations:

- The design of building will also include emergency exits, which can be used during emergency situation.
- Adequate internal and external water distribution system will be designed, which could also supply adequate quantity of water for firefighting during emergency.
- Fire hydrants and firefighting extinguishers will be provided at locations where necessary.

6.7 Impacts During Construction Stage

The potential environmental impacts of the proposed unit along with the mitigation measures during the construction stage of the project have been described as following:

6.7.1 Change in land use

The proposed project site is a vacant plot in the premises of pharmaceutical industry and the area where the project is situated, vacant plot, however industrial units are also located in the near vicinity of the project area.

Mitigation

Proposed project will not impose any major negative impact on the area in view of changes in land use because the proposed site is situated in the premises of working unit as mentioned above.

6.7.2 Impacts on Topography

The construction of the proposed project will not bring major changes in the existing topography of the project site. The changes due to the construction of the unit will be of localized nature. There will be no significant changes offsite the project area.

Mitigation

Not required.

6.7.3 Impacts on Soils

The overall geology and soil quality of the project site is not expected to be adversely impacted due to the execution of the proposed project during the construction period.

Mitigation

Plantation needs to take place at the project site so that soil becomes stabilized.

6.7.4 Impacts on Surface and Ground water

During the construction stage, the sanitary wastewater will be generated by the worker' camp(s).

Mitigation

At project site, the sanitation system already exists which will provide the safe disposal of wastewater produced from workers camp.

6.7.5 Impacts on Air Quality

During construction phase, negligible change will occur in air quality due to the construction machinery used for the development of proposed project.

Mitigation.

No such heavy machinery will be used which has the capacity to change the air quality at project site.

6.7.6 Water Consumption

During construction phase, water will be used for the preparation of the raw material, for watering under-construction buildings and consumption by the workers in various domestic activities. It will cause negative impact on underground water resource. The consumption of the water will be high causing minor negative impact on the water resource of the area. The groundwater may get polluted due to the presence/consumption of the chemicals and petroleum products on-site

Mitigation measures for water

Following mitigation measures will be required for water sources:

- Avoid un-necessary consumption of the water and close the tap when water isn't in use
- Special care will be required to protect the chemicals and petroleum products from spillage and contaminating the ground water sources
- Proper knowledge regarding the watering of the under-construction building should be given to the workers in order to conserve water
- Water efficient equipment and process will be used
- Awareness regarding the water conservation techniques should be carried out
- The wastewater that is being consumed from the use of the labour on-site will be disposed off in the wastewater drains.

6.7.7 Health and Safety of Workers

The construction activities will impose certain negative impacts on health and safety of the workers.

This impact will be minor because the construction volume is small, however mitigation measures will be required to minimize/eliminate health and safety related negative impacts of the project.

Mitigation

Implementation of the following measures will ensure health and safety of the workers during the construction stage:

- The contractor will ensure that the construction workers / laborers are trained in safety procedures for all relevant aspects of construction:
- Proponent of the Project will make regular checks to ensure that the contractor is following safety working procedures/safety measures.
- Formal emergency procedures will be developed for construction site in case of any accident. First aid kits and other necessary equipment will be kept available at site along with the list of emergency phone numbers to be contacted in case of any accident.

6.7.8 Impacts on flora

There are no trees or shrubs present at the proposed project site.

Mitigation

Not required.

6.7.9 Impacts on Fauna

The usual fauna found at the project locality of sparrows, crows, common manias etc. the project will not have any significant impacts on fauna.

Mitigation

Extensive plantation will be done at open places to enhance the beauty of the locality and project site.

6.7.10 Change of Land Appearance/layout

There would be no significant change in the land appearance, as minor execution will be involved in construction activities. The excavated earth material will be used for land filling / uplifting the floor level within the project site.

Mitigation

Not required because the project site is situated in the working unit.

6.7.11 Employment Generation

During construction stage of the proposed project, about 50+ workers/laborers will be engaged. This will be positive change.

Mitigation

Not required.

6.8 IMPACTS DURING OPERATIONAL STAGE

The anticipated environmental impacts related to the proposed Project have been studied for the operational stage as discussed below: -

6.8.1 Impacts on Climate

There will be no negative impacts expected to occur overall on climate of the area during the operational stage of the Project because the production process will be

undertaken in the closed chamber machines or vessels. Generators and machinery will be maintained properly and will not impose any negative impacts on climate.

Mitigation

Not required

6.8.2 Employment Generation

When the project will be in full operation, it will generate employment for 250-300 persons. This will be a major positive impact.

6.8.3 Air Quality

During the regular operational stage of the proposed project no emissions will be generated from process however some negligible emissions from stand by generators and machinery will be produced to deal with that cyclones will be installed design and specifications are given in chapter-3.

Mitigation

Schedule of over hauling /maintenance of stand by generator/machinery will be developed.

Cyclone will also be installed at generator/machinery.

5.8.4 Noise

During the operational stage, noise will be generated only from the operation of the stand by generators and in the production hall but to the negligible level. No noisy process will be involved in the proposed project.

Mitigation

The proper foundation of the stand by generator will be constructed to cope with the problem of tremor / vibration which will consequently abate the noise problem.

- Sound proof canopy and silencer will also be installed.
- Schedule of over hauling /maintenance of stand by generator will be developed.
- Proper set back will be provided from the boundary wall, which will also help to minimize / eliminate the noise pollution.
- Extensive tree plantation along the boundary wall and at open places will also be done to act as sound barrier / sound absorber.

6.8.4 Vapor/Fumes in Production Hall

While production of the anti-biotic products some negligible fumes may be produced in the production hall. However, all the process will be undertaken in the closed chamber plan.

Mitigation

- Suction Hood will be installed in the production hall to suck the fumes if needed.
- These vapors or fugitive emissions will be captured into wet cotton filters.

6.8.5 Water Consumption

During the operational stage of the proposed project water will be used for washrooms, kitchen and process.

Mitigation

At open places the grassy lawns will be developed to recharge the water table, which will also help to control the surface runoff during rainy season. Treated wastewater will be sprinkled inside the industry premises on grassy plots.

6.8.6 Wastewater Generation

During the regular operation of the proposed project wastewater will be produced from different sources as process, kitchen or washrooms, floor washing etc.

Mitigation

- For the treatment of above mentioned, wastewater treatment plant will be installed.
- The treated wastewater will be sprinkled or used for watering of tree plantation and vegetation within the battery limits of factory.

6.8.7 Solvent Liquid Waste Generation

While operation of unit spent solvent, as liquid waste will also be generating from decontamination of mixing equipment.

Mitigation

Reuse spent solvent liquid waste from equipment decontamination as makeup in subsequent formulations.

6.8.8 Solid Waste Generation

No process solid waste or hazardous waste will be produced. Only plastic drums and packing material will be produced.

Mitigation

Packaging material and plastic drums are saleable items and will be sold to contractors and record will be maintained.

6.8.9 Health and Safety of Workers

The workers especially working in the production hall / area may be at health risk. Because they may be some exposure if they will not be properly trained and provide with Personal Protective Equipments (PPEs). This will be major negative impact if not mitigated properly.

Mitigation

To mitigate the hazards of health and safety of workers the following mitigations measures will be undertaken:

- No worker aged below 18 years or over 60 years shall be employed for any job involving physical handling of hazardous substances.
- All workers shall be thoroughly trained in safety precautions for handling hazardous substances and shall be supervised by qualified supervisors.
- Protective clothing and equipment comprising helmet of cloth cap, safety spectacles of goggles, respirators or masks, rubber or plastic gloves and workboats shall be available for all workers who may be exposed to any hazardous substances, and no worker shall be permitted on job unless and until he is wearing such protective clothing and equipment.
- To avoid any kind of potential environmental hazards the worker would be trained properly so that they know the potential hazard of chemical.
- Proper cross ventilation shall be under taken to avoid from any bad smell/odor.
- There will be proper arrangement to handle accidental / disastrous situation.
- The instructions for the workers, safety signs and precautionary / preventive measures for the costumers / visitors would be displayed at the suitable / prominent places.

- Adequate supply of water shall be made available to the workers for their personal washing as well as for washing their protective equipment's.
- Protective clothing and equipment's of the workers shall be washed and cleaned as often as required to ensure their efficiency.
- No worker shall be permitted to eat, drink or smoke till he has removed his protective clothing and equipment, washed his hands and face and left the place of work.
- All firefighting, emergency and safety equipment's shall be frequently checked and properly maintained.
- First aid medical facilities equipped with required antidotes shall be available in the premises, supervised by trained staff.
- Medical checkup of all workers shall be carried out at the time of employment and at least once a year thereafter.

6.8.10 Emergency Response

The operation of the proposed unit will handle workers and visitors who may become ill or have work related accidents. In addition, disasters such as earthquakes and fires may occur which have to be considered for minimizing their impacts.

Mitigation

- An Emergency Response Plan for earthquakes and manmade disasters will be prepared by the project management.
- Adequate supply of water shall be made available to the worker for personal washing as well as for washing their protective equipment's.
- All firefighting, emergency and Safety equipment's shall be frequently checked and properly maintained.
- Proper size and types of portable fire extinguishers will be kept near areas where flammable liquids are handled or stored.
- Adequate fire suppression system will be installed and properly functioning.
- The aesthetic conditions / outlook of the unit should be improved by tree plantation / ornamental plants and proper physical infrastructure.
- Proper disastrous and firefighting arrangements (fire extinguisher, fire hydrants, kits, instruments etc.) shall be ensured at many places of both sites.

- The internationally recognized health and safety standards will be adopted and the Emergency Response Plan will be developed and implemented in close consultation with the Fire Fighting Department.

6.9 POTENTIAL ENVIRONMENTAL ENHANCEMENT MEASURES

6.9.1 Tree Plantation

Tree plantation within and outside the premises is a potential environmental enhancement measure. A large area will be reserved for tree plantation and among plants native flora like Peepal, Kikar, Dherak, Safeeda and Amaltas will be planted in the specified green zone which will have the maximum capacity to reduce noise pollution and tolerance index of these species are more than 10. Some floral species like roses and other ornamental evergreen plants will also be introduced in the lawn which will enhance aesthetic beauty. In addition, trees like Safeeda and Amaltas will be planted as boundary wall inside the lawn which will look like green wall. The proponent will also make arrangements for protection and maintenance of trees.

6.9.2 Facility Design

The introduction of an ecologically effective and efficient design of a facility is the environmental enhancement measures planned by the proponent to be incorporated into the design of the intended project.

6.9.3 Social Enhancement Measures

Following measures will be adopted to improve the socio-economic condition of the area:

a. Employment/Poverty Alleviation

The employment opportunities in the project area will be increased due to the establishment of proposed project at the aforesaid location. During establishment of the aforesaid facility un-skilled workers will be required as labors, sanitary workers and sweepers as well as for the skilled workers such as; accounts and managers to run the administration office local community will be considered on the priority basis. In totality, the overall economic conditions of the area will be improved due to the establishment of the aforesaid project.

b. Local Economy

The employment opportunities and/or income sources generated by the project construction and operation will be long term in nature. These will be enhanced once the construction phase is completed. The local economy will experience a slight boom during development and operational period.

7. ENVIRONMENTAL MANAGEMENT AND MONITORING PLANS

This chapter summarizes the various mitigation measures as outlined previously in this EIA Report that will be implemented during the construction, operational and decommissioning stages of project. It does not discuss further the mitigation measures which have been adopted within the design and planning of the project, as these are comprehensively covered in previous section of this EIA Report.

Outline and key features of the EMMP for operations phase is presented. As per the environmental legislation in Pakistan, the EMMP for the operations phase, along with other documents, is to be submitted to the environmental protection agency to obtain confirmation for compliance and Environmental Approval for project operation. Even after implementation of the suggested mitigation measures, the impact may remain significant, and require monitoring.

7.1 Objectives

An Environmental Monitoring Plan was outlined alongside Environmental Management Plan to ensure all the corrective actions to counter adverse impacts which gives a detailed EMMP. The EMMP will serve as a principal execution module of the project that would not only mitigate adverse environmental impacts during the construction and the operational phase of the project but also ensures that environmental standards and good in-housekeeping are being practiced. Continuous environmental monitoring is exercised to ensure that preventive measures are in place and effective to sustain environmental integrity. The key objectives of EMMP are:

- To outline functions and responsibilities of persons
- To state and implement standards and guidelines which are required under environmental legislations particular in context to the Project
- To facilitate the implementation of the mitigation measures by providing the technical details of each Project's impact and proposing implementation schedule of the proposed mitigation measures
- Define a monitoring mechanism and identify monitoring parameters to ensure that all proposed mitigation measures are completely and effectively implemented
- Identify the resources required to implement the EMMP and outline corresponding financing arrangements

7.2 Management Approach

The organizational roles and responsibilities of the key players are summarized below:

7.2.1 Proponent

The project proponent will undertake overall responsibility for compliance with the EMMP. The concerned departments will carry out verification checks to ensure that the contractors are effectively implementing their environmental and social requirements.

7.2.2 Contractors

The contractors will implement the majority of environmental and social mitigation measures. The contractors will carry out field activities as part of the project. The contractors are subject to certain liabilities under the environmental laws of the country, and under its contract with proponent.

7.3 Components of EMMP

The EMMP consists of the following:

- Institutional arrangements
- Mitigation plan to reduce the severity of associated impacts
- Monitoring plan to monitor the impacts and their severity
- Environmental and social trainings to raise awareness

7.3.1 Remedial and Mitigation Measures

The objective of remedial and mitigation measures in any project is to identify practices, technologies or activities that would prevent, minimize or mitigate all significant negativities that are likely to occur due to the proposed project.

7.4 Environmental Management and Monitoring Framework

The purpose of the environmental management and monitoring framework is to facilitate the implementation of environmental commitments, included in the environmental impact assessment. The proponent is committed for the protection of

the environment and to the sustainable management of its related operations and activities.

Table 13: Environmental Management Plan

Sr. No.	***Project Component or Impact***	***Target***	***Action***	***Responsibility***
A- Pre-Construction / Design Related				
1	Seismic Hazard Analysis	To project the building structure from seismic hazard	• The building will be designed to withstand moderate to large earthquakes	Proponent / Design Consultants
2	Emergency Response	To mitigate the emergency condition	The following mitigation measure will be adopted to minimize or eliminate the emergency situations: • The design of building will also include emergency exists which can be used during emergency situation. • Adequate internal and external water distribution system will be designed, which could also supply adequate quantity of water for firefighting during emergency. • Fire hydrants and firefighting extinguishers will be provided at locations where necessary.	Proponent / Design Consultants
B- Construction Stage				

1	Impacts on soil	To ensure the minimum changes in soil	• Plantation needs to take place at the project site so that soil becomes stabilized	Contractor / Proponent
2	Impacts on surface and ground water	To mitigate the problem of contamination of surface and groundwater	• At project site, the, sanitation system will be provided for the safe disposal of wastewater produced from workers camp.	Contractor / Proponent
3	Health and Safety of workers and public	To ensure health and safety of workers and public	Implementation of the following measures will ensure health and safety of the workers during the construction stage: • The Contractor will ensure that the construction workers / laborers are trained in safety procedures for all relevant aspects of construction; • Proponents of the Project will make regular checks to ensure that the contractor is following safety working procedures / safety measures. • Formal emergency procedures will be developed for construction site in case of an accident. First aid kits and other necessary equipment will be kept available at site along with the list of emergency phone numbers to be contracted in case of any accident.	Contractor / Proponent

			• The safety of the public at all stages of the construction will be ensured through appropriate public education and safety measures such as use of sign boards, barriers and flags and proper illumination at night.	
4	Fauna	To ensure that fauna may be affected at minimum level	• Extensive plantation will be done at open places to enhance the beauty of the locality and project site. This will also help to protect fauna, particularly birds.	Factory Management / Proponent
5	Disposal of Mucking Material	To avoid the degradation of soil	• The spoil will be carefully examined and disposed off in an environmental friendly manner by transporting it in closed containers and filling at appropriate sites. • It is also desirable to utilize the muck in such a way that it is consumed for the construction of any other structure within the Project Site or in the immediate vicinity. • Utilization of much in the vicinity of the Project Site is considered as the best option for its disposal.	Contractor / Proponent
C- Operational Stage				

1	Air Quality	To avoid the degradation of air quality	In order to minimize air pollution, following mitigation measures are recommended: • Schedule of over hauling/maintenance of stand by generator will be developed.	Factory Management / Proponent
2	Vapors/Fumes in Production Hall	To mitigate the vapors/fumes impact in production hall	• Cyclone will be installed in the production hall to suck the vapors or fugitive emissions (if needed).	Factory Management / Proponent
3	Noise	To mitigate the Noise problem	• The proper foundation of the stand by generator will be constructed to cope with the problem of tremor / vibration which will consequently abate the noise problem. • Sound proof canopy and silencer will also be installed. • Schedule of over hauling / maintenance of stand by generator will be developed. • Proper set back will be provided from the boundary wall, which will also help to minimize / eliminate the noise pollution.	Factory Management / Proponent

			• Extensive tree plantation along the boundary wall and at open places will also be done to act as sound barrier / sound absorber.	
4	Water Consumption	To mitigate this problem	• At open places the grassy lawns will be developed to recharge the water table, which will also help to control the surface runoff during rainy season. • Treated wastewater will be sprinkled inside the mill premises on grassy plots. However, the area is agricultural in nature so the maximum rainwater will recharge the water table.	Factory Management / Proponent
5	Solvent Liquid Waste Generation	To proper reuse the liquid solvent waste	• Reuse spent solvent liquid waste from equipment decontamination as makeup in subsequent formulations.	Factory Management / Proponent
6	Wastewater Generation	To mitigate the problem	• For the treatment of above mentioned wastewater treatment plant will be installed. • The treated wastewater will be sprinkled or used for watering of tree plantation and vegetation within the battery limits of factory.	Factory Management / Proponent

7	Solid Waste Generation	To establish a proper management plan for this solid waste	• No process solid waste or hazardous waste will be produced. • The dispensary waste will be incinerated through Shalimar Hospital incinerator.	Factory Management / Proponent
8	Health & Safety of Workers	To provide necessary health & safety facilities	To mitigate the hazards of health and safety of workers the following mitigations measures will be undertaken: • No worker aged below 18 years or over 60 years shall be employed for any job involving physical handling of hazardous substances. • All workers shall be thoroughly trained in safety precautions for handling hazardous substances and shall be supervised by qualified supervisors. • Protective clothing and equipment comprising helmet of cloth cap, safety spectacles or goggles, respirators or masks, rubber or plastic gloves and workboats shall be available for all workers who may be exposed to any hazardous substance, and no worker shall be permitted on job unless and until he is wearing such protective clothing and equipment.	Factory Management / Proponent

			• To avoid any potential environmental hazards the workers would be trained properly so that they know the potential hazard of chemical. • Proper cross ventilation shall be undertaken to avoid from any bad smell/odor. • There will be proper arrangement to handle accidental / disastrous situation. • The instructions for the workers, safety signs and precautionary / preventive measures for the costumers / visitors would be displayed at suitable / prominent places. • Adequate supply of water shall be made available to the workers for personal washing as well as for washing their protective equipment's. • Protective clothing and equipment of the workers shall be washed and cleaned as often as required to ensure their efficiency. • No worker shall be permitted to eat, drink or smoke till he has removed his protective clothing and equipment, washed his hands and face and left the place of work.	

			• All firefighting, emergency and safety equipment's shall be frequently checked and properly maintained. • First aid medical facility equipped with required antidotes shall be available in the premises, supervised by trained staff. • Medical check-up of all workers shall be carried out at the time of employment and at least once a year thereafter.	
9	Emergency Response	To mitigate the problem of emergency situations	• An Emergency Response Plan for earthquakes and man-made disasters will be prepared by the project management. • Adequate supply of water shall be made available to the workers for personal washing as well as for washing their protective equipment's. • All firefighting, emergency and safety equipment's shall be frequently checked and properly maintained. • Proper size and types of portable fire extinguishers will be kept near areas where flammable liquids are handled or stored.	Factory Management / Proponent

			• Adequate fore suppression system will be installed and properly functioning. • The aesthetic conditions / outlook of the unit should be improved by tree plantation / ornamental plants and proper physical infrastructure. • Proper disastrous and fire fighting arrangements (fire extinguishers, fire hydrants, kits, instruments etc.) shall be ensured at many places of both sites. • The internationally recognized health and safety standards will be adopted and the Emergency Response Plan will be developed and implemented in close consultation with the Fire Fighting Department, Paramedics and Civil Defense.	

7.4.1 Institutional Arrangements and Responsibilities

The proposed institutional arrangement for the implementation of EMMP is based on the discussions held with the Forest Department, Environmental Protection Department, Local Union Council Office and Proponent. The discussion concluded that three types of institutional arrangements are essential for the effective implementation of EMMP, these are follows:

- Establishment of Environment/Social Management Group
- External Monitoring by EPA certified laboratory
- EMC established by Proponent after consultation with consultant

a) Roles and Responsibilities

Following are the designated roles and responsibilities of the employees involved in the monitoring and management of the adverse impacts:

Table 14: Roles and Responsibilities

Roles and Responsibilities		
Sr#	**Concerned Persons**	**Duties**
1	The Project Manager	Following will be the responsibilities of the Project Manager • **Ensure that the contractor is aware of all specifications, legal constraints, standards and procedures pertaining to the project specifically with regards to environment.** • **Ensure that all stipulations within the EMMP are communicated and adhered to by contractor(s)** • **Monitor the implementation of the EMMP throughout the project by means of site inspections and meetings. This will be documented as part of the minutes of the site meeting documents** • **Ensuring project execution within defined budget and timelines**

		• **Conducting regular check of the project status and meetings with project team** • **Provide support and guidance to project team as and when needed** • **Project Manager is expected to continually monitor and improve the overall performance of their operation**
4	HSE Manager	In addition to the health and safety responsibilities held by staff, managers and supervisors must do whatever is reasonably practical to ensure that both the workplace and the work itself are safe. This includes: • **Ensuring that staff are appropriately trained and supervised** • **Identifying, assessing and managing health and safety risks** • **Consulting with workers (including staff, affiliates and contractors):** iv. Health and safety risk assessments v. Decisions are made about the measures to be taken to eliminate or control these risks vi. Health and safety risk assessments • **Implementing health and safety risk management programs relevant to their operations, teaching, research and consulting functions and work environment** • **Reporting (to the Human Resources Unit), investigating and responding to all hazards, accidents, incidents and taking action to control the risk** • **Assisting with the development, implementation and maintenance of a return to work program for injured staff.** • **Be fully conversant with the EIA and conditions of its approval** • **Be fully conversant with the EMMP**

		• **Be fully conversant with all relevant environmental legislation, policies and procedures, and ensure compliance** • **Convey the contents of this document to the contractor site staff and discuss the contents in detail with the Project Manager and Contractor** • **Undertake regular and comprehensive inspection of the site and surrounding areas in order to monitor compliance with the EMMP** • **Take appropriate action if the specifications contained in the EMMP are not followed** • **Monitor and verify that environmental impacts are kept to a minimum, as far as possible** • **Review and approve construction methods, with input from the Site Manager, where necessary** • **Ensure that activities on site comply with all relevant environmental legislation** • **Compile progress reports on regular basis, with input from the Site Manager, for submission to the Project Manager, including a final post excavation audit** • **Liaise with the Site Manager regarding the monitoring of the site** • **Report any non-compliance or remedial measures that need to be applied** • **All environmental problems arising on the construction area will be reported to the Site Manager by the Environmental Manager. Reports on such problems will be submitted to the Project Manager by the Site Manager**

7.4.2 Proposed Monitoring Program to Assess Performance or Output of EMP

The following environmental issues are considered to warrant specific management actions for the implementation of project. These issues have specific regulatory

requirements (contained in the development consent or Environmental Approval) and/or are considered to have the potential to result in a non-compliance with a legislative requirement or generate community complaints. To manage the adverse environmental impacts on the physical parameters of the environment following management and monitoring plans will be adopted:

Table 15: Environmental Monitoring and Management Plan

Aspect	Potential Impacts/ Risks	Likely Duration	Magnitude if not Mitigated	Proposed Mitigation Measures	Responsibility	Environmental Budget
A – Pre-Construction / Related						
Changes in land valve	Economic gains	Permanent	Minor positive	-	-	
Seismic Hazard	Damage due to earthquake	Permanent	Moderate negative	• The structure of the proposed project has been designed in such a way that building may withstand moderate to large earthquakes.	Design Consultant / Proponent	
Emergency Response	There are always changes of earthquakes and other manmade disasters such as fires due to	Permanent	Minor negative	The following mitigation measures will be adopted to minimize or	Design Consultant / Proponent	50,000/-

	electrical short circuiting, over heating etc.			eliminate the emergency situations: • The design of building will include emergency exits, which can be used during emergency situation. • Adequate internal and external water distribution system will be designed, which could also supply adequate quantity of water for firefighting during emergency. • Fire hydrants and firefighting extinguishers will be provided at		

				locations where necessary		
B – Construction Stage						
Aspect	**Potential Impacts/ Risks**	**Likely Duration**	**Magnitude if not Mitigated**	**Proposed Mitigation Measures**	**Responsibility**	**Environmental Budget**
Topography	The construction of the proposed project will not bring major changes in the existing topography of the project site. The changes due to the construction of the unit will be of localized nature. There will be no significant changes off-site the project area.	-	-	-	-	
Impact on Soils	The overall geology and soil quality of the	Temporary	Minor negative	• Plantation needs to take place at the	Contractors / Proponent	

	project site is not expected to be adversely impacted due to the execution of the proposed project during the construction period.			project site so that soil becomes stabilized.		25,000/-
Impact on surface and groundwater	During the construction stage, the sanitary wastewater will be generated by the workers' camp(s).	Temporary	Moderate negative	• At project site, the sanitation system already exists which will provide the safe disposal of wastewater produced from workers camp. • The storage of lubricant materials such as oil and grease will be confined to a specific area so that in case of any	Contractors / Proponent	50,000/-

				leakage or spillage, the lubricant materials do not contaminate the entire project site.		
Air Quality	During the construction phase, negligible change will occur in air quality due to the construction machinery used for the development of proposed project.	Temporary	Minor negative	No such heavy machinery will be used, which has capacity to change the air quality radically at project site	Contractor / Proponent	50,000/-
Health and safety of workers and public	The construction activities impose certain negative impacts on health and safety of the workers and public	Temporary	Moderate negative	Implementation of the following measures will ensure health and safety of the workers during the construction stage:	Contractor / Proponent	30,000/-

				• the construction workers / laborers are trained in safety procedures for all relevant aspects of construction; • Proponents of the project will make regular checks to ensure that the contractor is following safety working procedures/safety measure. • Formal emergency procedures will be developed for construction site in case of an accident. First aid kits and other necessary		

				equipment will be kept available at site along • The contractor will ensure that • With the list of emergency phone numbers to be contracted in case of any accident.		
Water Consumption	During the construction of project, the small quantity of water will be used because project is small and building is double story. It will not exert any significant effect on water table.	-	-	-	-	
Flora	There are no trees or shrubs present at the project site.	-	-	-	-	

Fauna	The usual fauna found in the project area is sparrows, crows, common manias etc. the project will be having any significant impact on fauna.	Permanent	Minor negative	• Extensive plantation will be done at open places to protect birds and to enhance the beauty of the locality and project site.	Proponent	25,000/-
Disposal of Mucking Material	Inevitable cut and fill earthwork operations will open up scars on the land in and around the project site. The Excavated materials that are unsuitable for use need to be stored, transported and disposed off appropriately at the designated sites.	Temporary	Moderate negative	• The spoil will be carefully examined and disposed off in an environmental friendly manner by transporting it in closed containers and filling at appropriate sites	Contractor / Proponent	10,000/-
Employment Generation	During construction stage of the proposed	-	-	-	-	

	project about 55 workers / laborers will be engaged. This will be minor positive change.					
C- Operational Stage						
Aspect	**Potential Impacts/ Risks**	**Likely Duration**	**Magnitude if not Mitigated**	**Proposed Mitigation Measures**	**Responsibility**	
Impact on climate	There will be no negative impacts expected to occur overall on climate of the area during the operational stage of the project because the production process will be undertaken in the closed chamber machines. Generators will be kept in closed	-	-	-	-	

	room and cyclone will be installed to control the emissions hence it will not impose any negative impact on climate.					
Employment Generation	When the project will be in full operation, it will generate employment for 285 persons. This will be a major positive impact.	Permanent	Major Positive	-	-	
Air Quality	During the regular operational stage of the proposed project no emissions will be generated from process however some negligible emissions from stand by generators will be produced which will be	Permanent	Moderate negative	•	Schedule of over hauling/maintenance of stand by generator will be developed.	70,000/-

	within the PEQS because green fuel Natural gas will be used.					
Vapor/Fumes in Production Hall	While product of the anti-biotic products some negligible fumes may be produced in the production hall. However, all the process will be undertaken in the closed chamber machinery.	Permanent	Negative	• Cyclone will be installed in the production hall if needed. • These vapors or fugitive emissions will be captured into wet cotton filters.	Factory Management / Proponent	25,000/-
Noise	During the operational stage, noise will be generated only from the operation of the stand by generator. No noisy process will be	Permanent	Moderate negative	• The proper foundation of the stand by generator will be constructed to cope with the problem of tremor / vibration which will	Factory Management / Proponent	

	involved in the proposed project.			consequently abate the noise problem. • Sound proof canopy and silencer will also be installed. • Schedule of over hauling/maintenance of stand by generator will be developed. • Proper set back will be provided from the boundary wall, which will also help to minimize / eliminate the noise pollution. • Extensive tree plantation along the boundary wall and at open places will be done to act as sound		25,000/-

				barrier / sound absorber.		
Water Consumption	During the operational stage of the proposed project about water will be used for washrooms, kitchen and process.	Permanent	Negative	• At open places the grassy lawns will be developed to recharge the water table, which will also help to control the surface runoff during rainy season	Factory management/ Proponent	
Wastewater Generation	During the regular operation of the proposed project about wastewater will be produced from different sources as process, kitchen or washrooms, floor washing etc	Permanent	Major negative	The following mitigation measures will be adopted: • For the treatment of the above-mentioned wastewater treatment plant will be installed. • The treated wastewater will be sprinkled or used for	Factory management / Proponent	70,000/-

				watering of tree plantation and vegetation within the battery limits of factory. • The surplus treated wastewater will be drained out into the main Drain.		
Solvent Liquid Waste Generation	• While operation of the unit spent solvent • As liquid waste will also be generating from decontamination of mixing equipment.	Permanent	Major negative	• Reuse spent solvent liquid waste from equipment • Decontamination as makeup in subsequent formulations.	Factory Management /Proponent	20,000/-

Solid Waste Generation	No process solid waste or hazardous waste is will be produced. Only plastic drums and packaging material will be produced. The dispensary waste will be incinerated thought Shalimar Hospital incinerator.	Permanent	Moderate negative	No process solid waste or hazardous waste will be produced from proposed unit.	Factory Management / Proponent	30,000/-
Health & Safety of Workers	The workers especially working in the production hall / area may be at health risk. Because they may be some exposure if they will not be properly trained and provide with Personal Protective Equipment's	Permanent	Major Negative	To mitigate the hazards of health and safety of workers the following mitigations measures will be undertaken: No worker aged below 18 years or over 60 years shall be		50,000/-

	(PPEs). This will be major negative impact if not mitigated properly.			employed for any job involving physical handling of hazardous substances. • All workers shall be thoroughly trained in safety precautions for handling hazardous substances and shall be supervised by qualified supervisors. • Projective clothing and equipment comprising helmet of the cloth cap, safety		

				spectacles or goggles, respirators or masks, rubber or plastic gloves and Workboats shall be available for all workers who may be exposed to any hazardous substance, and no worker shall be permitted on job unless and until he is wearing such protective clothing and equipment.		

				• To avoid any potential environmental hazards the workers would be trained properly so that they know potential hazard of chemical. • Proper cross ventilation shall be undertaken to avoid from any bad smell / odor. • First aid medical facility equipped with required antidotes shall be available in		

				the premises, supervised by trained staff. • Medical check-up of all workers shall be carried out at the time of employment and at least once a year thereafter.		
Emergency Response	The operation of the proposed unit will involve workers and visitors who may Become ill or have work related accidents. In addition, disasters such as earthquakes and fires may occur which	Permanent	Major negative	• An Emergency Response Plan for earthquakes and manmade disasters will be prepared by the project Management.	Factory Management / Proponent	30,000/-

	have to be considered for minimizing their impacts.			• Adequate supply of water shall be made available t the workers for personal washing as well as for washing their projective equipment's. • All firefighting, emergency and safety equipment's shall be frequently checked and properly maintained.		

				Proper size and types of portable fire extinguishers will be kept near areas where flammable liquids are handled or stored. • Adequate fire suppression system will be installed and properly functioning. • The aesthetic conditions / outlook of the unit should be improved by tree plantation / ornamental		

				plants and proper physical infrastructure. • Proper disastrous and firefighting arrangements (fire extinguishers, fire hydrants, kits, entrustments etc.) shall be ensured at many places of both sites. • The internationally recognized health and safety standards will be adopted and		

				the Emergency Response Plan will be developed and implemented in close consultation with the Fire Fighting Department, Paramedics and Civil Defense.		

7.5 Proposed EMP Reporting and Reviewing Procedures

An effective mechanism to store and communicate environmental information during the project is an essential requirement of an EMP.

7.5.1 Meetings

As environment is multidisciplinary subject with environmentalist having a dynamic role therefore Environment Officer would be considered as integral part in both constructional and operational team. Participation of Environment Officer in daily morning meeting and any other special meeting is mandatory. Besides internal meeting HSE Engineer/Environment Officer is also responsible to conduct meeting with local in keeping administration in liaison.

7.5.2 Changes-Record Register

A change-record register will be maintained at the site, in order to document any changes in project design. These changes will be handled through the change management mechanism.

7.6 Impacts and their Mitigation Summary

Environmental and social impacts have been identified for the process of pharmaceutical plant; their impacts had been mitigation by adopting required measures as recommended in EMMP of this EIA Report within the Project Area of Influence. The major impacts on physical, biological and social environment are described as under:

Table 16: Impacts Summary of Pharmaceutical Industry Processing

Environmental Parameters	**Impact Assessment during operational Phase**
	Operational
A: Physical	
Land Resources	
Soil Erosion and Contamination	0

Transportation	-1t
Solid Waste and By-Products	-2p
Land Use	NA
Air Resources	
Noise Pollution	-1t
Air Pollution	-1t
Dust Emissions	-1t
Water Resources	
Ground Water	-1p
Surface Water	NA
Wastewater	-2p
B : Ecological	
Flora	
Tree Cutting	+1p
Fauna	
Terrestrial Fauna	+1p
C: Socio-Economic	
Employment Opportunities	+3p
Land Value Appreciation	+2t
Availability of Local Raw-Material	+2p
Economic Uplift	+3p

D: Hazards		
Physical Hazards	-1p	
Chemical Hazards	-1p	
Health and Safety	-1p	
Legends: 1= Low; 2= Medium; 3= High; 4= Extremely High; NA= Not Applicable; t= Temporary; p= Permanent; app= Applicable; 0= Negligible		

7.7 Equipment Maintenance Details

The Client and Contractor will be responsible to maintain equipment with higher efficiency and in good working conditions. The equipment will be maintained twice a year as well as monthly inspection will be done on the regular basis to keep the process going without any interruption.

7.8 Environmental Budget

The environmental budget for the project is PKR 5 lacs which will be used for the control of the air pollution by the installation of dust collection system, tree plantation at various designated sites, EMMP for the operational phase and monitoring of environmental parameters (such as ambient air, noise and wastewater). The total cost of the project is PKR 6.7 million. EMMP and the monitoring will be carried out on the regular basis. So, more than 1% of the total project cost will be allocated for the environmental protection. Cost Breakup is given in front of each entity in table 15: Environmental Monitoring and Management Plan.

Table 17: Schedule for Implementation of Environmental Budget

Schedule for Implementation of Environmental Budget			
Construction Phase			
Parameter	**Frequency**	**Schedule for Implementation**	**Responsibilities**

Solid waste	Fortnight	Visual check to access the disposal methods	Contractor and supervisor
Vehicular Exhaust gases	Monthly	Instrumental measurement	Contractor and supervisor, Reporting to EPA
Ground water quality and wastewater	Annually	Monitoring of water and wastewater parameters	Contractor and supervisor, Reporting to EPA
Health and safety	Monthly	Monitoring of health and safety of workers	Contractor and supervisor, Reporting to EPA
Operational Phase			
Parameter	**Frequency**	**Schedule for Implementation**	**Responsibility**
Air Quality	Quarterly	Ambient air quality and Scrubber Maintenance	Administration of project and Reporting to EPA
Noise	Quarterly	Noise by activities in the multi-purpose building	Administration
Surface and ground water	Bi-Annually	Monitoring of water and wastewater parameters defined by EPA	Administration and Reporting to EPA
Solid waste	Quarterly	Waste generation	Administration of the project

8. CONCLUSION AND RECOMMENDATIONS

The findings of EIA Report showed that although the establishment of pharmaceutical plant is expected to have significant negative impacts on the environment during the construction and operational phases, but the severity of these adverse impacts can be reduced significantly by adopting the suggested mitigation measures in EMMP with true spirit. Moreover, their severity can be further reduced by adopting relative mitigation measures as proposed in the Chapter 7 of this EIA Report. The impacts were assessed by frequent site visits, studying related projects and by reviewing relevant documents. Generally, the project is planned to follow efficient environmental management systems. Specific environmental and social benefits have been mentioned below which depend on the proper application of mitigation measures suggested in EMMP and best engineering practices.

8.1 Merits and Demerits

The major positive impacts include;

- **Increased job opportunities,**
- **Business opportunities,**
- **Availability ot the locals.**
- **Environmental enhancement through tree planation.**

The project will raise the income of the persons directly associated with project as well as it will also improve the socio-economic status of the area. The project is expected to stimulate the local economies of the community as the majority of the people living in the nearby areas are associated with the labor related activities.

In general, potential adverse environmental effects resulting from the proposed activities will be temporary in nature, short-term and of low magnitude. Through application of standards, recommended mitigation measures, adherence to applicable permit conditions and regulations, adverse impacts can be effectively minimized. The project is not likely to have significant adverse environmental impacts which cannot be mitigated. Negligible negative impacts that are likely occur during pharmaceutical plant processing includes; air pollution due to movements of vehicles, removal of bushes and shrubs, potential impact to the local water resources and social impacts may affect the locals residing in the nearby community can be foreseen. Mitigation measures will

be implemented to minimize environmental impacts though they are still negligible. There are certain mitigations suggested to cater for the aforesaid issues.

8.2 Recommendations

The intensity and severity of impacts occurred due to the pharmaceutical plant processing varies with change in the nature and magnitude of the project as well as depends upon the baseline environmental conditions of the area. The mitigation measures will require constant information flow and consultation with the stakeholders to ensure the least adverse social-economic impact to outweigh the “no project development” scenario.

- ☑ **The adverse environmental impacts can be reduced significantly by adopting best management and monitoring practices as well as by implementation EMMP with true spirit**
- ☑ **Proper PPEs including aprons, rubber gloves and shoes should be provided to workers**
- ☑ **No compromise on public health and environment should be allowed.**
- ☑ **Waste minimization practices should be introduced to workers by conducting lectures on spot to aware the workers about the long-term benefits of the same in lieu of surrounding environment.**
- ☑ **A proper tree plantation plan should also be developed in order to make the process environment friendly.**
- ☑ **Small domestic waste storage bins should be placed at different locations for proper collection and disposal of the solid waste.**
- ☑ **It is recommended that the Proponent should obtain an Environmental Approval (NOC) from the Punjab-EPA before proceeding further.**

GLOSSARY

Aesthetic	Concerned with beauty or appreciation of beauty.
Agency	A business or organization providing a particular service on behalf of another business, person, or group.
Cephalosporins	The cephalosporins are a class of β-lactam antibiotics originally derived from the fungus Acremonium
Climate	The weather conditions prevailing in an area in general or over a long period.
Consultant	A person who provides professional advice or services to companies for fee.
Construction Waste	Waste generated from the buildings and construction industry and includes material like bricks, concrete, tiles, debris, ceramics and more.
Convention	An agreement between states covering particular matters, especially one less formal than a treaty.
Demographic	A single vital or social statistic of a human population, as the number of births or deaths.
Ecology	The branch of biology that deals with the relations of organisms to one another and to their physical surroundings.
Endangered species	A species of animal or plant that is seriously at risk of extinction.
Environment	Relationship of natural world (human beings, animals and plants) with physical surroundings (air, land, water).
Excavation	Excavation is the act or process of digging, especially when something specifics being removed from the ground. Archaeologists use excavation to find artifacts and fossils.
Framework	A framework is a real or conceptual structure intended to serve as a support or guide for the building of something that expands the structure into something useful.

Hazardous Waste	Hazardous Waste is waste that poses substantial or potential threats to public health or environment.
Livelihood	A set of activities involving Securing the basic necessities –food, water, shelter and clothing of life.
Municipal Waste	Municipal Solid Waste (MSW)—more commonly known as trash or garbage—consists of everyday items we use and then throw away, such as product packaging, grass clippings, furniture, clothing, bottles, food scraps, newspapers, appliances, paint, and batteries. This comes from our homes, schools, hospitals, and businesses.
Nature	The phenomena of the physical world collectively, including plants, animals, the landscape, and other features and products of the earth, as opposed to humans or human creations.
Penicillin's	The term "penicillin" is defined as the natural product of Penicillium mould with antimicrobial activity.
Pharmaceutical Industry	The pharmaceutical industry is the part of the healthcare sector that deals with medications
Preservation	Preservation is the strict setting aside of natural resources to prevent the use or contact by humans or by human intervention. In terms of policy making this often means setting aside areas as nature reserves (otherwise known as wildlife reserves), parks, or other conservation areas.
Proponent	A person who advocates a theory, proposal, or course of action.
Rehabilitation	To restore to a condition of good health, ability to work, or the like.
Resettlement	The settlement of people in a different place.
Resource	A stock or supply of money, materials, staff, and other assets that can be drawn on by a person or organization in order to function effectively.

Sanitation	Conditions relating to public health, especially the provision of clean drinking water and adequate sewage disposal.
Stakeholder	A stakeholder is a party that has an interest in a company and can either affect or be affected by the business. The primary stakeholders in a typical corporation are its investors, employees and customers.
Topography	Topography is the study of the shape and features of the surface of the Earth and other observable astronomical objects including planets, moons, and asteroids.
Vaccines	A substance used to stimulate the production of antibodies and provide immunity against one or several diseases, prepared from the causative agent of a disease, its products, or a synthetic substitute, treated to act as an antigen without inducing the disease
Vegetation	Plants considered collectively, especially those found in a particular area or habitat.

LIST OF ABBREVATIONS

ABBREVIATION	DESCRIPTION
ASR	Air Sensitive Receivers
BDL	Below Detection Limit
BOD	Bio-chemical Oxygen Demand
CC	Construction Contractor
CDM	Clean Development Mechanism
CO	Carbon Monoxide
COD	Chemical Oxygen Demand
DCO	District Co-ordination Officer
DD	Deputy Director
DG	Directorate General
DRR	Disaster Risk Reduction
DWQS	Drinking Water Quality Standards
EE	Environmental Engineer
EIA	Environmental Impact Assessment
EMMP Plan	Environmental Management and Monitoring
EPA	Environment Protection Agency
EPC	Engineering Procurement Construction
EPD	Environment Protection Department
EPHE	Environmental & Public Health Engineering
FGDs	Focused Group Discussion
GDP	Gross Domestic Product
gm	Gram
GoP	Government of Pakistan
IEE	Initial Environmental Examination
LGO	Local Government Ordinance
LDA	Lahore Development Authority
LDL	Lowest Detection Limit
mg/l	Milligrams per liter

MSL	Mean Sea Level
NCS	National Conservation Strategy
NEQS	National Environmental Quality Standards
NEP	National Environmental Policy
NO2	Nitrogen Dioxide
NOC	No Objection Certificate
OH & S	Occupational Health and Safety
PAPs	Project Affected Persons
PEPA	Pakistan Environmental Protection Act
PEPC	Pakistan Environmental Protection Council
PEQS	Punjab Environmental Quality Standards
PM	Particulate Matter
SO2	Sulfur Dioxide
SOP	Standard Operating Procedures
SWM	Solid Waste Management
TA	Technical Assistance
TORs	Terms of Reference
TSS	Total Suspended Solids
UNDP	United Nation Development Pro
WASA	Water and Sanitation Agency

LIST OF PEOPLE CONSULTED AND THEIR VIEWS

SR. NO.	NAME	ID CARD NUMBER	OCCUPATION	CONCERN/VIEWS
1.	Ghulam Shabir	36303-7360882-5	farmer	Positive
2.	Ansar Ali	34101-5615463-9	Farmer	Positive
3.	Liaqat Ali	34101-527.5075-1	Farmer	Positive
4.	Abdul Rehman	34102-0434594-7	Shop Owner	Concerned about air pollution
5.	Muhammad Bilal	36303-9299987-3	Shop Owner	Concerned about Noise pollution
6.	Muhammad Yousaf	36302-5965175-3	Daily Wager	Positive
7.	Muhammad Asif	36303-4107290-1	Daily Wager	Positive
8.	Muhammad Iqbal	36303-1561962-1	Vendor	Positive
9.	Abdul Hameed	36302-0474840-7	Vendor	Positive
10.	Muhammad Imran	42201-3691562-7	Daily Wager	Positive
11.	Muhammad Sabir	36303-9221124-3	Vendor	Concerned noise pollution
12.	Muhammad Shahid	36306-4248907-7	School Teacher	Wastewater should be properly treated prior to final disposal in nearby drain
13.	Sohail Ahmad	35304-8398428-1	Field Officer Horticulture department	Plantation should be carried out at extensive scale

SOURCES OF DATA

- https://www.pmd.gov.pk/en/
- https://www.pbs.gov.pk/
- http://www.weather-and-climate.com/
- https://www.investmentbank.com/pharma-industry-overview/
- https://www.ppma.org.pk/Profile/pakistan-pharmaceutical-industry/
- Lakdawalla, D. N. (2018). Economics of the pharmaceutical industry. Journal of Economic Literature, 56(2), 397-449.
- Tauqeer, F., Myhr, K., & Gopinathan, U. (2019). Institutional barriers and enablers to implementing and complying with internationally accepted quality standards in the local pharmaceutical industry of Pakistan: a qualitative study. *Health policy and planning*, *34*(6), 440-449.
- Bhatti, S. H., Vorobyev, D., Zakariya, R., & Christofi, M. (2020). Social capital, knowledge sharing, work meaningfulness and creativity: evidence from the Pakistani pharmaceutical industry. Journal of Intellectual Capital.
- Field Surveys
- Public Consultations

TERMS OF REFERENCE (TORS)

ENVIRONMENTAL IMPACTASSESSMENT OF ARSONS PHARMACEUTICAL INDUSTRIES (PVT) LTD. MOZA NEHLA TEHSIL RAIWIND NEAR SUNDER INDUSTRIAL ESTATE, DISTRICT, LAHORE.

1.1 PROJECT PROPONENT:

Asim Raza Khosa S/o Mushtaq Hussain Saqi.

1.2 SCOPE OF WORK:

Mr. **Asim Raza Khosa** intends to establish **Arsons Pharmaceutical Industries (Pvt) Ltd**. a Pharmaceutical unit in Lahore.

1.3 SPECIFIC OBJECTIVES:

The EIA shall be carried out with an objective of identifying environmental impacts during change in Land use of the Master Plan. The specific objectives will be as follows:

- Identification of impacts on physical environment including land, water, and air and suggesting mitigation measures.
- Identification of impacts on biological environment including flora, fauna and natural habitat and suggesting mitigation measures.
- Identification of impacts on socio-economic environment in the vicinity of the proposed landfill site and suggesting mitigation measure.
- Mitigation measures for potential impacts (Physical, Biological and Socio-environmental)
- Environmental Management and Monitoring Plan/ Contingency Measures

1.4 THE EIA SHALL COVER FOLLOWING MAIN AREAS:

- Background of the project – Justification
- Objectives
- Site locations and mappings
- Complete description of the proposed sites
- Collection, analysis and presentation of baseline data
- Identification of significant environmental issues

- Assessment of direct, indirect and cumulative impacts on environment
- Mitigation measures to minimize predicted adverse impacts
- Assessment of public perception about proposed project
- Meeting with the stakeholders and their perception
- Review of the relevant Policies, Legislation and Regulations
- Monitoring plan
- Conclusions

1.5 MAJOR TASKS:

The consultant shall be responsible for undertaking the following tasks in EIA study.

1.5.1 Collection and collation of Secondary Information:

Prior to the start of field activities, available secondary data and reports will be reviewed in detail.

1.5.2 Analysis of Alternative:

Suitable site alternative will be suggested, if required, by the review of relevant maps, available secondary data and legal review.

1.5.3 Location Alternative:

Alternative site will be suggested, if required, by using relevant maps and GPS during area visits.

1.5.4 Management and Operational Alternatives:

Management and operational alternatives will be suggested, if required, by the review of institutional set-ups of departments relevant to the project.

1.5.5 Design Alternatives:

Design alternatives will be suggested, if required, by the review of current design layout.

1.5.6 Review of Relevant Environmental Laws:

The Consultants will carefully review the national/local authority laws, Pakistan Environmental Protection Act 1997, Forest Act 1930, Land Acquisition Act 1874 etc. and international regulations like World Bank Operational Policy, Cites Act etc. for conducting EIA study. This approach will eliminate any

chances of the rejection of the project by the concerned EPA due to the consideration of all the concerned laws during the preparation of the EIA report.

1.5.7 Collection of existing Environmental setting/baseline Data:

Based on the desk study and reconnaissance survey, checklist and questionnaires / Performa's will be prepared for the baseline surveys. Consultants will proceed to the site and the collection of primary data /database on the environmental aspects will be done, which includes the following:

1.5.8 Physical resources:

Physiographic, topography and soils, atmosphere, climate, hydrology, surface water, ground water, geology, seismology etc including environmental monitoring and testing.

1.5.9 Environmental Monitoring:

In case of the absence of updated data, one-time limited environmental monitoring will be conducted in order to assess and analyze the existing level of particulate and gaseous emissions, potable water and liquid from any existing sources lying within the Study Area.

The environmental monitoring and testing will be carried out through EPA approved Environmental Laboratory.

1.5.10 Ecological resources:

Identification of the number of tree species present in the project area, as well as, determination of tree density and area covered by them. Tree counting and their identification along with other vegetation and crops, if any, will be done by making field visits, and by the review of the available literature relevant to the study. Information about the flora and fauna of the area will be collected. Information of the type of the livestock in the area will be noted along with their density.

1.5.11 Socio-economic survey:

Data on social and cultural conditions of the study area will be collected. Determination of the population density in the study area will be done by the review of district census report. The social survey also includes Land acquisition survey (if required) and Identification of vulnerable people/groups

i.e. Project Affected People, if any. Data about population density, Infrastructure (electricity, sanitation/ drainage facilities, mode of transportation), health and education status will be collected. Data collection about number of schools and hospitals in the area, if any; no. of graveyards in the area, if any; no. of recreational and commercial areas, if any; availability of utilities; and strata of socio-economic group of people dominant in the area will be kept in focus during baseline study..

1.5.12 Evaluation / Identification of Potential Impacts:

Prediction and assessment of the proposed Project's likely negative impacts during the construction and operational stages will be carried out by conducting the field visits of project and study area. The impacts will be discussed in three sectors with reference to the following parameters:

1.5.13 Physical environment:

Under physical environment, impacts on following areas will be measured.

- **Land resources:** Evaluation of the environmental effects of the project on land use in the immediate vicinity of the project (i.e. within the identified boundaries of the project) will be done, e.g. Agriculture, Archaeological, Historical and Cultural monuments
- **Water resources:** Precipitation, surface water resources, ground water resources.
- **Air quality:** levels of air pollutants like particulate matter, CO and other parameters and their adverse impacts, if any, on the surrounding environment will be determined to evaluate its effects.
- **Noise levels** will be evaluated for the construction and operational phase of the project

1.5.14 Ecological environment:

Impacts on ecological environment may include

- Impacts on fauna of area, livestock and migratory birds (if any)
- Reserved forests, if any.
- Relocation/resettlement issues etc.
- Impacts on flora

1.5.15 Socio-economic Impacts:

- Impacts on livelihood of Project Affected Persons (PAPs) (if any): Questionnaires will be developed and prepared and filled during the field visits to know about the public perception of the study area.
- Impacts on social settings of the project area.
- Relocation/ resettlement issues
- Impacts of the project on local property values and insurance rates will be taken in to consideration.
- Disruption archaeological, historic, religious, and unique natural values in the project area if any

1.5.16 Suggested Mitigation/contingency Measures:

After the identification of the adverse environmental impacts, necessary mitigation measures would be proposed. Mitigation plans will be proposed based on the intensity of each impact. For instance, if the impact is low enough, it may be ignored; if the impact is high, specific mitigation measures will be recommended/suggested and if the impact is medium, it may need some mitigation measures or simply be monitored/managed properly in order to ensure that it remains within the acceptable limits.

1.5.17 Environmental Management Plan (EMP):

An Environmental Management Plan (EMP) will be developed. EMP will propose a plan of action that will indicate the responsibilities and required measures to minimize the negative environmental effects of the project at different stages.

Under the EMP, institutional set up will be studied and the required enhancement, which is deemed necessary for effective management and monitoring of the environmental activities, will be proposed. The EMP will address the following aspects:

- Organizational structure and responsibilities;
- Mitigation Plan;
- Environmental Monitoring Plan;
- Communication and documentation;
- Training of Staff;

- Environmental Cost;

1.5.18 Stakeholder participation and consultation:

Consultation is required at least during two stages of the EIA process as follows:

- During the process of the EIA Study and report preparation, the public is consulted through meetings, seminars, or workshops. Proponents will hold public meetings and/or open houses in local communities to describe the details of the project and to receive feedback on potential issues, interests or concerns related to the project. Engagement may also include informal discussions with landowners and nearby residents and meetings with community associations, businesses, municipal councils, regional planning agencies, public interest group's communities.
- Once the draft EIA report has been prepared & submitted then public hearing is required. The consultants shall fully assist the Client in the public hearing, including furnishing the replies/information to the questions/issues raised during the hearing.

1.5.19 Deliverables Consultant:

1. Complete Draft EIA report featuring all the development sites. The EIA report shall be completed in respect of baseline data, detail socio and environmental impact assessment, Environmental Management Plan and Alternatives considered.
2. Final EIA Report to be submitted after receiving comments from Clients.

1.6 Time Duration:

The time duration for completion of whole study is 2 months.

1.7 SCOPE OF WORK; Client:

The client has following scope of Work

1. Give all data related to the current and proposed Land use of the sites.
2. Give all the detail maps of the sites.
3. Give coordinates of all the sites

4. Give detail description of the area.
5. Land use Study for the sites.
6. Arrange Stakeholders consultation along with Consultants
7. Submission of EIA report in EPA and its follow-up until award of NOC.

PROJECT TEAM AND RESPONSIBILITIES

Name of expert	Position held	Highest Qualification	TERM OF REFERENCES
Kamal Ahmed Cheema	Chief Environmentalist	M. Phil. Environmental Economics, PIDE, Islamabad	Mr. Kamal would be responsible for: ❖ Environmental Assessment & Management. ❖ Supervision of monitoring team for air water noise and soil analysis. ❖ Preparation of technical EMP
Arslan Iqbal	Environmentalist-2	MPhil Environmental Sciences, UOL	Mr. Arslan would be responsible for: ❖ Biodiversity assessment ❖ Detailed flora fauna survey of project sites ❖ Identification of threaten and endangered species ❖ Project impacts on flora and fauna ❖ Detailed social survey of project sites ❖ Social impact assessment ❖ Consultation with stakeholders
Amna Hafeez	Environmentalist-3	M.Sc Mountain Conservation and Watershed Management, University of the Punjab	Ms. Amna would be responsible for: ❖ Report writing ❖ Field surveys and consultation with stakeholders ❖ Preparation of Environment monitoring plan ❖ Preparation of technical EMP

			❖ Identification of sensitive receptors ❖ Capacity building & training ❖ Conducting and monitoring of health assessment surveys ❖ Environment health risk assessment and management ❖ Detailed survey of project sites ❖ Environmental Assessment ❖ Social Assessment
Rahma Butt	Environmentalist-4	BS (Hons) Environmental Science, Lahore College for Women University.	Ms. Rahma would be responsible for: ❖ Detailed flora and fauna survey of project sites ❖ Site Monitoring ❖ Socio-Economic survey & analysis ❖ Report Writing

File Tracking No.

CHECKLIST (EIA)

PAK EPA GUIDELINES FOR PREPARATION AND REVIEW OF ENVIRONMENTAL REPORTS, 1997

Required Content	EIA Report		
	PAGE NO.	REMARKS (If Any)	LACKING
Executive summary: **1.** Title and location of project	01		
2. Name of the proponent	02		
3. Name of the organization preparing the report	02		
4. A brief outline of the proposal (type, process, technology and land requirement)	03		
5. The major impacts	04		
6. Recommendations for mitigation measures	04		
7. Proposed monitoring	06		
Introduction: 1. Purpose of report	24		
2. Identification of project and proponent	21		
3. Details of consultant	22		
4. Brief description of nature, size, and location of project	18		
Screening: Whether the Project requires IEE or EIA as per Regulations	25		
Scoping			
1. Spatial and Temporal Boundaries of Environmental Assessment	25		
2. Important issues and concerns raised during consultation	26		

3. Significant impacts and factors to be determined	27		
Consideration of Alternatives			
1. Site alternatives, their selection and rejection criteria	27		
2. Design/Technology alternatives, their selection and rejection criteria	27		
3. Environmental Alternatives, their selection and rejection criteria	28		
4. Economic Alternatives, their selection and rejection criteria	28		
Description of the project:			
1. Objectives of Project	29		
2. Location and Site Layout of the project (May be annexed at the end of report)	29		
3. Land use on the site	30		
4. Road access	30		
5. Vegetation features of the site	30		
6. Cost and Magnitude of operation	36		
7. Schedule of implementation	37		
8. Description of the project (Process flow chart/steps, Technology, Raw material and products, by-products)	38		
9. Restoration and rehabilitation plans	46		
Description of Environment: Clear-cut picture of existing environmental resources:			
1. Baseline Physical Environment	49		
2. Baseline Ecological Environment	59		
3. Baseline Socioeconomic Environment	60		

4. Lab reports of environmental analyses (along with soil tests, geo-investigation in case of building projects and industries)	--	Attached as Annexure	
5. Suitability of the site (not prohibited, environmentally sensitive, incompatible to surroundings and unsuitable)	66		
Impact Assessment 1. Methodologies for impact identifications (One/more)			
✓ Checklists	81		
✓ Matrices	83		
✓ Networks	NA		
✓ Overlays	NA		
✓ GIS and Computer expert systems	23	Project Site Analysis has been through Google Earth.	
2. Characteristics of impacts (nature, magnitude, extent and location, timing, duration, reversibility, risk)	76		
Screening of potential Environmental Impacts and mitigation measures on/during:			
1. Project location	84		
2. Design	85		
3. Construction phase	86		
4. Operational phase	89		
5. Potential Environmental Enhancement Measures	94		
Environmental management and monitoring program			
i. Description of proposed	134		

mitigation actions along with:			
ii. Schedule for implementation and Environmental budget	136		
iii. Environmental Management Team along with their Roles and responsibilities (by name or position)	107		
iv. Proposed monitoring program to assess performance or output of EMP	109		
v. Proposed EMP reporting and reviewing procedures	134		
vi. Any training needs required to ensure implementation of EMP and Monitoring plans	-		
Required Content	**EIA Report**		
	PAGE NO.	**REMARKS (If Any)**	**LACKING**
Stakeholders Consultation: Communicate the possible impacts and concerns to the following to assist further analysis and decision making:			
i. Proponent's Environment Management Team	67		
ii. The responsible authority	69		
iii. Other departments and agencies	71		
iv. Environmental practitioners and experts	73		
v. Affected and wider community	73		
Appendices			
	141		

1. Glossary			
2. List of abbreviations	144		
3. Lists of individuals and organizations consulted along with their written feedback	146		
4. Sources of data and a full list of all reference material used	147		
5. Terms of references of environmental reports and those given to individual specialists	148		
6. List of names, qualifications and roles of team members carrying out the IEE/EIA study	155		
7. Approvals from other concerned departments		Attached as an Annexure	