

# ENVIRONMENTAL IMPACT ASSESSMENT REPORT

## M/S SUNCROP (PVT) LIMITED

Plot # 127 & 128, Phase II, Multan Industrial Estate District Multan



**SUBMITTED BY:**

**MR. MUHAMMAD Shafiq Khan**

**PREPARED BY:**



**ENVIRO STEWARDS COMPANY (PVT) Limited**

akmal@envirostewardspk.com

0301-1199600

www.envirostewardspk.com

**TABLE OF CONTENT**

EXECUTIVE SUMMARY ..... i

    Brief of Project ..... ii

    Legal and Administrative Framework ..... v

    Assessment of Major Impacts ..... v

    Proposed Mitigation Measures ..... vi

    Proposed Monitoring Framework ..... viii

    Conclusions and Recommendations ..... ix

1 INTRODUCTION ..... 1

    1.1 General ..... 1

    1.2 Purpose of the Report ..... 1

    1.3 Identification of the project and proponent ..... 2

    1.4 Consultant Information ..... 2

    1.5 Nature, Size and Location of Project ..... 3

    1.6 Scope of the EIA Study, Area of Influence, and Magnitude of Efforts ..... 5

2 POLICY, LEGISLATION, LEGAL & ADMINISTRATIVE FRAMEWORK ..... 6

    2.1 General Overview ..... 6

    2.2 Screening ..... 6

    2.3 Regulatory and Framework Compliance ..... 6

    2.4 Relevant Legal and Institutional Framework ..... 7

        2.4.1 Punjab Environmental Protection Act, 1997 (Amended 2012) ..... 7

        2.4.2 Review of IEE & EIA Regulations, 2022 ..... 7

        2.4.3 National Environmental Policy, 2005 ..... 7

        2.4.4 Punjab Local Government Act, 2022 ..... 7

        2.4.5 Explosives Act, 1884 ..... 8

2.4.6	Punjab Municipal Solid Waste Management Rules, 2022 .....	8
2.4.7	Punjab Water Act, 2019 .....	8
2.4.8	Punjab Wildlife (Protection, Preservation, Conservation and Management) Act, 1974 .....	8
2.4.9	Forest Act, 1927 .....	8
2.4.10	Labor, Safety and Health Laws.....	9
2.4.11	Public Consultation Guidelines, 1997 .....	9
2.4.12	Guidelines for Sensitive and Critical Areas.....	9
2.5	Institutional Framework.....	9
3	SCOPING.....	10
3.1	Spatial and Temporal Boundaries of Environmental Assessment .....	10
3.2	Important Issues and Concerns Raised during Consultation .....	12
3.3	Significant Impacts and Factors to be Determined .....	12
4	Alternatives Consideration .....	14
4.1	Site Alternatives .....	14
4.2	Design and Layout Alternatives.....	15
4.3	Environmental Alternatives .....	15
4.4	Economic Alternatives.....	16
5	PROJECT DESCRIPTION .....	17
5.1	Objective of Project.....	17
5.2	Location & Site Layout.....	17
5.2.1	Site Location.....	17
5.2.2	Site Coordinates.....	18
5.3	Land use of the site .....	18
5.4	Road Access.....	18

5.5	Vegetative Features of Site .....	20
5.6	Plantation Plan .....	20
5.6.1	Key Features .....	20
5.6.2	Maintenance Plan .....	20
5.6.3	Landscaping Considerations .....	20
5.6.4	Plantation Impact Assessment .....	21
5.7	Magnitude & Cost of Project .....	22
5.7.1	Cost Breakdown .....	23
5.8	Proposed Schedule of Implementation .....	23
5.9	Description of Project .....	24
5.9.1	Project Overview .....	24
5.9.2	Process Description .....	24
5.10	Available Facilities .....	29
5.11	Restoration and Rehabilitation Plan .....	30
5.12	Safety Signs/Safety Boards .....	31
	.....	31
5.13	Government Approvals and Leases .....	32
6	DESCRIPTION OF ENVIRONMENT .....	33
6.1	Physical Environment .....	33
6.1.1	Geological Formation .....	34
6.1.2	Seismicity .....	34
6.1.3	Climate .....	35
6.1.4	Season and Rainfall .....	35
6.1.5	Temperature .....	35
6.2	Environmental baseline modeling .....	36

6.2.1	Noise Level .....	36
6.2.2	Ambient Air Quality .....	36
6.2.3	Surface Water and Ground Water .....	37
6.3	Ecological Environment .....	37
6.3.1	Flora .....	37
6.3.2	Fauna .....	38
6.4	Socio Economic Environment .....	38
6.4.1	Study objectives .....	38
6.4.2	Resettlement patterns .....	39
6.4.3	Indigenous people .....	39
6.4.4	Religion, ethnic group and Cast Patterns .....	39
6.5	Quality of Life Value .....	39
6.5.1	Education .....	40
6.5.2	Health facility .....	40
6.5.3	Economy of Area .....	40
6.5.4	Agriculture .....	41
6.5.5	Livestock .....	41
6.5.6	Archeology and Cultural Sites .....	41
7	IMPACTS AND MITIGATION MEASURES .....	42
7.1	Purpose of Environmental Mitigation Measures .....	42
7.2	Impact Identification Methodology .....	43
7.3	Approaches for Mitigation Measures .....	44
7.4	Impacts and Mitigation Measures due to Location .....	44
7.5	Impacts and Mitigation Measures in Construction Phase .....	45
7.6	Impacts and Mitigation Measure During Operational Phase .....	50

7.7	Emergency Exits, Emergency Preparedness Plan, and PPE Details .....	55
7.8	Environmental Enhancement Measures .....	56
8	ENVIRONMENTAL MANAGEMENT & MONITORING PLAN .....	58
8.1	Objectives of the Environmental Management Program .....	58
8.2	Training of Workers.....	72
8.3	Environmental Management Team.....	73
8.3.1	Key Members of the Environmental Management Team: .....	74
8.3.2	Responsibilities of Functionaries: .....	74
8.4	Equipment Maintenance Details .....	75
8.5	Proposed Environmental Monitoring .....	75
8.5.1	Monitoring Components:.....	75
8.6	Environmental Budget .....	76
09	million PKR.....	76
9	STAKEHOLDER CONSULTATION .....	77
9.1	Benefits and Objectives of Stakeholder Consultation .....	77
9.2	Identification and Classification of Stakeholders .....	77
9.3	Views, Concerns, and Suggestions of Various Stakeholders.....	78
9.4	Methodology for Consultation .....	78
9.5	Environmental Management Team and Experts .....	79
9.6	The Responsible Authority for EMP Implementation.....	80
9.7	Environmental Practitioners and Experts .....	80
9.8	Other Departments and Agencies.....	81
9.9	Consultation with Affected and Wider Community.....	83
10	RAINWATER HARVESTING SYSTEM .....	84
11	CONCLUSION.....	85

---

GLOSSARY .....	86
LIST OF ABBREVIATIONS .....	89
LIST OF INDIVIDUALS AND THEIR FEEDBACK .....	92
SOURCE OF DATA.....	93
List Of Names, Qualifications and Roles of Team Members Carrying Out the IEE/EIA Study .....	94
TERMS OF REFERENCES.....	95



EPA librarian.epa  
110.38.160.195  
18/5/2026 11:44:39 AM

## DISCLAIMER

The information presented herein is derived from the unique attributes of the project site as disclosed by the project proponents, stakeholders, and promoters, through provided maps, verbal communications, and all associated documentation. The veracity of the detail's rests solely with the project proponents, stakeholders, and promoters, and not with the environmental consultant. The Environmental Impact Assessment (EIA) or Initial Environmental Examination (IEE) report is not subject to dispute in any court of law.



*Sure*



Representative: EIA & IEE Team

EPA librarian.epa  
110.38.160.195  
18/5/2026 11:44:39 AM

---

## EXECUTIVE SUMMARY

This Impact Assessment (EIA) report presents a comprehensive overview of the key environmental and social considerations related to the proposed formulation of fertilizer and pesticides, M/s Suncrop (Pvt) Limited, located at Plot # 127 & 128, Phase II, Multan Industrial Estate District Multan, spanning a total area of 343361 SFT.

The aim of the project is to produce high-quality, effective, and affordable crop protection products to support sustainable agriculture. The project is intended to ensure timely availability of pesticides for farmers, reduce dependency on imports, and contribute to food security by enhancing crop yields and protecting against pests and diseases. Additionally, the unit aims to generate employment, promote local industrial growth, and operate in compliance with environmental and safety standards.

Enviro Stewards Company (Pvt.) Limited has been engaged as the environmental consulting firm responsible for preparing this assessment.

In accordance with the Punjab Environmental Protection Act and the Review of IEE & EIA Regulations, 2022, the project falls under **Schedule II** (List of projects requiring an EIA), Category B (Manufacturing & Processing), Sub-sector 8 (Pesticides and Fertilizer Manufacturing Unit). As such, the preparation and submission of an EIA is mandatory to obtain the required Environmental Approval from the relevant authorities.

This report evaluates the potential environmental and social impacts of the project across its entire lifecycle. Key areas of focus include land use, water and air quality, solid waste management, traffic patterns, noise levels, and the socio-economic well-being of nearby communities. The findings are supported by field data, stakeholder consultations, and technical analysis.

To address potential adverse impacts, a range of mitigation and management measures have been proposed, aimed at minimizing harm to the environment and surrounding population. These include best practices in construction management, pollution control, and community engagement.

Further technical details and a full description of the project, including planning and construction methodology, are provided in Chapter 05: Project Detail.

## Brief of Project

**Table 1 Brief of Project**

Sr. #	Title of Project	Suncrop (Pvt) Limited
i.	Location of Project	Plot # 127 & 128, Phase II, Multan Industrial Estate District Multan
ii.	Area of Project	343361 SFT
iii.	GPS Coordinates	30.1187928 N, 71.3791200 E
iv.	Cost of Project	273.32 million PKR
v.	Proponent of project	Muhammad Shafiq Khan
vi.	Nature of project	Formulation Unit of fertilizer and pesticides
vii.	Capacity of Formulation	5000 Liters per day
viii.	List of Pesticides Products	Solid and Liquid Pesticides are formed. Carbofuron, Cartap Hydrochloride, Monomehypho, Fipronil, Thiamethoxam  Fipronil, ufenuron, Bifenthrin, Lambda Cyhalothrin, Quzilofo p Ethyl <b>Detailed list is provided in chapter 3</b>
ix.	Purpose of Project	To establish a modern industrial facility equipped with advanced storage, and utility infrastructure to meet the growing demand of the local and national market
x.	Description of Project	A pesticides manufacturing facility, where imported/local technical-grade active ingredients are blended, diluted, and processed with solvents, carriers, and additives using mixers, bead mills, and RO water. Both liquid and solid

		formulations are prepared, quality tested, packed in automatic filling/sealing machines, and stored. The process involves only formulation and packaging, not chemical manufacturing, ensuring safe handling, environmental compliance, and reliable product supply
xi.	Cutting of Trees	There will be no cutting of trees. After construction trees will be planted
xii.	Water Usage	5-8 liter per day of water will be used
xiii.	Manpower	20-25 person during construction and 25-35 permanent maintenance staff
xiv.	Period of construction	05-06 months
xv.	Assessed environmental issues	Air emissions from volatile organic compounds (VOCs) and dust during mixing and transfer of raw materials, wastewater containing chemical residues from cleaning and process activities, and solid waste such as sludge, packaging, and off-spec products. Improper handling or accidental spills may also lead to soil and groundwater contamination. Additionally, energy consumption and noise from equipment operation contribute to overall environmental stress. Effective pollution control measures, waste minimization, and safe storage practices are essential to mitigate these impacts.

xvi.	Wastewater generation	Domestic and some of wastewater from operational activities will be produced
xvii.	Wastewater management/ disposal	After treatment in treatment plant, it will be disposed of in the sewerage system
xviii.	Rainwater Harvesting Plan	Infiltration trenches and storage tanks will be installed for RWH, detail in given under Heading 9 (RHW)
xix.	Control measures	Installing leak detection and emergency shut-off systems to prevent and control gas emissions, along with maintaining strict fire safety protocols such as firefighting equipment and trained personnel. Noise control measures and proper scheduling will minimize disturbance, while impervious flooring and spill containment systems will prevent soil and water contamination. Safe waste handling and disposal practices will be adopted
xx.	Protected Areas	As per field visits and consultations with wildlife and forest departments, the proposed project area <b>does not fall</b> in any protected area i.e. National Parks, Wildlife Sanctuaries, or Forest areas, etc.
xxi.	Consultant Company	Enviro Stewards Company (Pvt) Limited
xxii.	Compliance	In accordance with Punjab Environmental Protection Act & IEE/EIA Regulations 2022



---

## **Legal and Administrative Framework**

These include the National Conservation Strategy (1992), National Environmental Policy (2005), Pakistan Labor Policy (2010), and the Punjab Environmental Protection Act (PEPA 1997), along with its subsequent amendment in 2012. Additionally, the project ensures compliance with the Punjab Environmental Quality Standards (PEQS), the Land Acquisition Act (1894), the Prohibition of Cutting of Trees Act (1975), the Punjab Wildlife Act (1974), the Punjab Plantation and Maintenance of Trees Act (1974), and the Antiquities Act (1975).

A thorough review of environmental documents has been conducted, underscoring the mandatory submission of an environmental assessment study report as required by the Pakistan Environmental Protection Ordinance (PEPO), 1983, and reinforced by the Pakistan Environmental Protection Act (1997). Specifically, Section 12(1) of the amended PEPA (2012) stipulates that any project involving the construction or modification of the physical environment must conduct an Environmental Impact Assessment (EIA) or an Initial Environmental Examination (IEE) and obtain approval (NOC) from the relevant provincial environmental authority.

In the preparation of the report for said project, full consideration has been given to the PEPA (1997), the Punjab Environmental Protection (Amendment) Act (2012), and all other applicable legal requirements from both the Pakistan and Punjab governments, including the Land Acquisition Act (1894).

### **Assessment of Major Impacts**

#### **During Construction Phase**

The construction phase of the Proposed project will involve significant land development and infrastructure activities, which are likely to result in several environmental impacts. These impacts will primarily include soil erosion, dust generation, noise pollution, and disruption of local ecosystems. Soil erosion may occur due to excavation and land grading, particularly during heavy rainfall, which can lead to sedimentation of nearby water bodies. The generation of dust during construction

activities can have adverse effects on air quality, leading to health issues for workers and the surrounding community. Noise pollution from machinery and construction activities will likely impact both the local community and wildlife in the vicinity, especially during nighttime construction. Additionally, the project may disrupt local wildlife habitats, potentially leading to displacement of species, especially if there are areas of natural vegetation or wetland ecosystems within the project site.

### **During Operational Phase**

Once operational, the unit will generate environmental impacts mainly associated with air emissions, energy consumption, waste generation, and transportation activities. During formulation and packaging processes, there is a potential for fugitive emissions of dust and volatile organic compounds (VOCs), which may affect local air quality if not properly managed. The unit will utilize energy for mixers, pumps, and associated equipment, leading to indirect emissions if electricity is sourced from non-renewable energy. Solid waste, including off-spec products, sludge from equipment cleaning, and packaging materials, will require proper collection, storage, and disposal to prevent land and soil contamination. Wastewater from cleaning operations may contain traces of chemicals and must be treated before discharge. Additionally, vehicular movement for raw material supply and product distribution could contribute to greenhouse gas emissions, noise, and traffic congestion in the surrounding area. Adoption of strict environmental management practices, waste minimization, and pollution control measures will be essential to mitigate these impacts.

### **Proposed Mitigation Measures**

#### **Mitigation Measures During Construction Phase**

- **Dust Control:** Water sprinkling on unpaved roads, construction sites, and material stockpiles will be carried out regularly to suppress dust. Construction materials such as sand and cement will be stored in covered areas or containers.
- **Noise Reduction:** Use of well-maintained and quieter machinery, along with limiting high-noise activities to daytime hours, will help reduce the impact on

nearby communities and wildlife. Workers will be provided with protective hearing equipment where needed.

- **Erosion and Sediment Control:** Proper grading, construction of drainage channels, and installation of silt fences will help manage stormwater runoff and reduce soil erosion during excavation and site leveling.
- **Waste Management:** Construction waste will be segregated and disposed of by EPA approved vendor. Recyclable materials such as metal, wood, and concrete will be separated and reused where possible.
- **Protection of Flora and Fauna:** Vegetation clearance will be minimized, and native plants will be preserved where feasible. Construction zones will be clearly marked to avoid encroachment into ecologically sensitive areas.
- **Health and Safety:** Workers will be provided with safety gear and training. On-site medical aid and emergency response protocols will be established.
- **Traffic Management:** A traffic management plan will be implemented to control heavy vehicle movement and reduce inconvenience to local traffic, especially near residential areas.

### Mitigation Measures During Operational Phase

- **Solid Waste Management:** A proper waste collection and disposal system will be established.
- **Sewage and Wastewater Treatment:** A treatment unit (Septic Tank) will be installed to treat wastewater before its safe discharge or reuse, thereby protecting groundwater and surface water bodies.
- **Water Conservation:** Water-efficient fixtures will be installed, and public awareness campaigns will promote water-saving practices among residents. Rainwater harvesting systems may also be integrated.
- **Energy Efficiency:** Buildings will be designed with energy-efficient lighting, insulation, and ventilation. Solar panels or other renewable energy sources may be used to reduce dependency on the national grid.

- **Green Landscaping:** Native and drought-resistant plant species will be used in landscaping to reduce water use and enhance biodiversity. Green belts and parks will be maintained to improve air quality.
- **Traffic and Transportation:** Road infrastructure will be developed with dedicated pedestrian walkways and cycling lanes. Encouragement of public transport usage and smart traffic systems will help reduce emissions.
- **Environmental Monitoring:** Regular monitoring of air, water, and noise levels will be carried out to ensure compliance with environmental standards. An environmental management plan (EMP) will guide sustainable practices throughout the project's life.

### Proposed Monitoring Framework

Given the requirement for an Environmental Impact Assessment (EIA) due to the potential long-term, significant, or adverse environmental impacts associated with the Pesticides manufacturing, formulation and repackaging of solid, liquids and granules, it is essential to implement a comprehensive Environmental Monitoring Program. This program will systematically monitor key environmental parameters throughout all phases of the project—planning, construction, and post-construction to ensure full compliance with the Punjab Environmental Quality Standards (PEQS) and other applicable legal requirements.

The Environmental Management and Monitoring Plan serves as a strategic tool to minimize potential negative environmental effects during the development and operational stages of the Pesticides manufacturing, formulation and repackaging of solid, liquids and granules. It also seeks to enhance the overall project value by enforcing high standards for health, safety, and environmental protection.

The project proponent is fully committed to implementing all proposed mitigation measures during the land development, construction, and habitation phases. Environmental monitoring is a core element of this commitment and will be conducted regularly to assess compliance and performance. The specific details of the monitoring approach and frequency are provided in Chapter 08 of the report.

---

## Conclusions and Recommendations

The unit is expected to generate significant positive impacts, particularly by creating employment opportunities, enhancing fuel supply reliability, and supporting local commercial and domestic energy needs. The project will contribute to economic growth, improved business activities, and upliftment of the socioeconomic conditions of the surrounding community.

While some minor to moderate environmental risks may arise during the operational phase such as fugitive gas emissions, noise from filling operations, increased vehicular traffic, and potential fire or safety hazards, these impacts are considered manageable with proper safety and environmental controls.

The recommended mitigation measures, including leak detection systems, firefighting infrastructure, proper waste handling, and traffic management, are practical and cost-effective to minimize any negative effects.

To ensure the environmental and operational sustainability of the unit, a robust Environmental Management Plan (EMP) with monitoring and safety protocols has been proposed.

It is strongly recommended that the project proponent obtains all necessary regulatory approvals and licenses, including the Initial Environmental Examination (IEE)/Environmental Impact Assessment (EIA) clearance and No Objection Certificate (NOC) from the Punjab Environmental Protection Agency (Punjab EPA) and safety approvals from Civil Defense prior to construction and operation, ensuring full compliance with applicable laws and standards.

## 1 INTRODUCTION

### 1.1 General

The establishment of a fertilizer and pesticides formulation unit aims to meet the growing agricultural needs of Pakistan by ensuring the local production of effective and affordable crop protection products. With increasing pressure on agriculture to provide higher yields for a growing population, pesticides play a vital role in safeguarding crops from pests, insects, and diseases. The unit will reduce reliance on imported products, ensure consistent availability of quality pesticides to farmers, and promote self-sufficiency in the agrochemical sector. Economically, it will generate employment, support allied industries, and contribute to national growth. Environmentally, the project will operate under strict regulatory frameworks to ensure safe production, handling, and disposal practices, minimizing risks to human health, ecosystems, and natural resources. Ultimately, the project seeks to strengthen food security, enhance agricultural productivity, and support sustainable farming practices in the country.

Given its scale and potential impact, an Environmental Impact Assessment (EIA) is being undertaken to assess and address any environmental and social concerns, in compliance with the Punjab Environmental Protection Act and IEE/EIA Regulations 2022.

### 1.2 Purpose of the Report

This report has been prepared to conform to the requirements of the Punjab Environmental Protection (Amendment) Act 2012 (PEPA), which states that:

*"No proponent of a project shall commence construction or operation unless he has filed with the Provincial Agency an Initial Environmental Examination or where the project is likely to cause an adverse environmental effect, an Environmental Impact Assessment, and has obtained from the Provincial Agency approval in respect thereof."*

The EIA report is comprehensive, covering socio-economic, physical, and environmental aspects, including land use, forestry, crops, water bodies, biodiversity (flora and fauna), heritage, and other factors relevant to the project and its surrounding area. It meticulously details mitigation strategies intended to address and neutralize potential environmental impacts on human and environmental health in the vicinity of the project site. These strategies are applicable during both the construction phase and the regular operation of the project.

Moreover, the report serves as a crucial document for decision-makers, particularly the EPA of Punjab, providing all necessary information in the officially approved format. This facilitates an informed decision-making process regarding the issuance of the required environmental approval. Through this report, the proponent demonstrates a commitment to adhering to the Punjab Environment Quality Standards (PEQS) and maintaining a robust environmental management order throughout the lifecycle of the project.

### 1.3 Identification of the project and proponent

The detail of the project and proponent is given below:

<b>Name of project</b>	<b>Suncrop (Pvt) Limited</b>
<b>Location of project</b>	Plot # 127 & 128, Phase II, Multan Industrial Estate District Multan
<b>Proponent name</b>	Mr. Muhammad Shafiq Khan
<b>Address of proponent</b>	Qasim Road, House no. 48 Multan Cantt, District Multan
<b>CNIC</b>	32102-0457330-7

### 1.4 Consultant Information

The initiator has contracted with M/s Enviro Stewards Company (Private) Limited for the execution of report for the aforementioned project, in alignment with the standards and guidelines set forth by the Environmental Protection Agency (EPA) of




Punjab. To fulfill this objective, M/s Enviro Stewards Company (Private) Limited has assembled a team of experts, including environmental specialists, environmental engineers, and chemical engineers. Further information on the consultancy team is provided below:

<b>Detail of the Consultant</b>	
<b>Company name</b>	Enviro Stewards Company (Private) Limited
<b>Address</b>	1 <sup>st</sup> Floor Allied Bank A-Block Commercial Market Canal View Society, Lahore.
<b>Contact No.</b>	0301-1199600

### **1.5 Nature, Size and Location of Project**

Suncrop (Pvt.) Limited is a proposed Pesticides and fertilizer formulation unit, planned over a total area of 343361 SFT, located at Plot # 127 & 128, Phase II, Multan Industrial Estate District Multan. The project site lies in an industrial. The facility includes fertilizer and pesticides formulation. Its strategic location will enhance local energy accessibility, support regional economic activities, and contribute to sustainable development by providing a cleaner and more reliable fuel alternative.

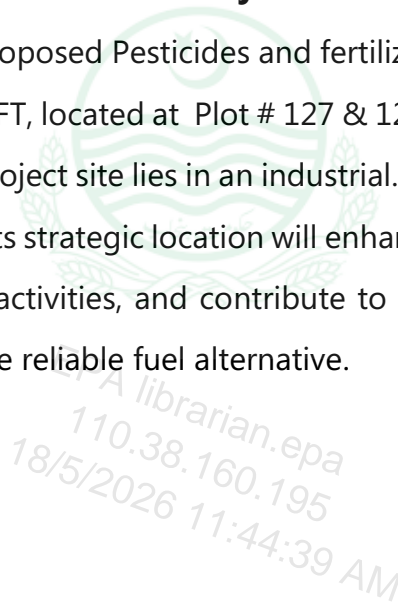



**Figure 1 Site Location**

ER Librarian.epa  
110.38.160.195  
18/5/2026 11:44:39 AM

*Jare*

## **1.6 Scope of the EIA Study, Area of Influence, and Magnitude of Efforts**

The scope of this Environmental Impact Assessment (EIA) study covers all potential environmental, social, and safety impacts associated with the proposed Suncrop (Pvt.) Limited formulation unit. It includes the assessment of impacts during construction, operation, and decommissioning phases, focusing on air quality, noise, soil and water resources, solid and liquid waste management, traffic impacts, occupational health and safety, and socio-economic conditions.

The area of influence extends beyond the project boundary to include the immediate surroundings that may be affected by vehicular movement, emissions, or accidental leaks, as well as nearby communities and sensitive receptors. It also considers regional impacts on local infrastructure, emergency response services, and economic activities.

The magnitude of efforts involves site inspections, stakeholder consultations, baseline environmental monitoring, risk assessment, and mitigation planning. Special emphasis has been placed on safety and environmental sustainability, in line with the Punjab Environmental Protection Act, and national environmental quality standards.



EPA librarian.epa  
110.38.160.195  
18/5/2026 11:44:39 AM

## 2 POLICY, LEGISLATION, LEGAL & ADMINISTRATIVE FRAMEWORK

### 2.1 General Overview

The proposed project will be developed and operated in accordance with the national and provincial environmental policies, legal requirements, and regulatory frameworks. The project aligns with the Pakistan Environmental Protection Act, 1997, and the Punjab Environmental Protection (Amendment) Act, 2012, which mandate environmental compliance through an Initial Environmental Examination (IEE) or Environmental Impact Assessment (EIA) approval from the Punjab Environmental Protection Agency (Punjab EPA).

Furthermore, the project adheres to the Punjab Environmental Quality Standards (PEQS) for air emissions, noise levels, and waste management to minimize environmental impacts.

### 2.2 Screening

Suncrop (Pvt) Limited, with a project area of 343361 SFT, falls under the following classification for environmental assessment **Schedule II** (List of projects requiring an EIA), Category B (Manufacturing & Processing), Sub-sector 8 (Pesticides and Fertilizer Manufacturing Unit)

In line with the Review of IEE & EIA Regulations, 2022, this classification mandates that the project must conduct an EIA for obtaining environmental approval from the Punjab Environmental Protection Agency (Punjab EPA). This ensures that the project is subject to appropriate regulatory oversight while not unduly burdening developers with excessive requirements.

### 2.3 Regulatory and Framework Compliance

The EIA study is guided by a range of legal, regulatory, and policy instruments that ensure environmental and planning compliance. These instruments collectively form a

comprehensive framework that governs the environmental aspects of housing developments in Punjab.

## **2.4 Relevant Legal and Institutional Framework**

### **2.4.1 Punjab Environmental Protection Act, 1997 (Amended 2012)**

This Act is the cornerstone of environmental law in Punjab and mandates the preparation of an IEE/EIA for any project that could significantly impact the environment. It establishes the powers of the Punjab EPA to review, approve, and monitor environmental assessments, ensuring that development activities comply with environmental protection standards.

### **2.4.2 Review of IEE & EIA Regulations, 2022**

These regulations under the Punjab Environmental Protection Act detail the procedures for the preparation, review, and approval of environmental reports. The regulations specify timelines, content requirements, and the classification of projects according to their potential environmental impact.

### **2.4.3 National Environmental Policy, 2005**

The National Environmental Policy sets the overarching vision for environmental governance in Pakistan, promoting sustainable development across all sectors. It emphasizes the importance of integrating environmental considerations into the planning process and provides a framework for policy alignment at both federal and provincial levels. The housing sector must ensure that it aligns with this national policy, especially regarding urban planning, waste management, and resource conservation.

### **2.4.4 Punjab Local Government Act, 2022**

This act defines the responsibilities of local governments in land development, waste management, municipal services, and infrastructure within urban settings. Pesticides manufacturing, formulation and repackaging of solid, liquids and granules must coordinate with local government authorities to ensure proper planning, waste management, and service delivery.

#### **2.4.5 Explosives Act, 1884**

This law regulates the handling of explosive and highly flammable materials. It requires specific safety precautions, secure storage, and government approvals for facilities handling combustible substance

#### **2.4.6 Punjab Municipal Solid Waste Management Rules, 2022**

These rules regulate the collection, storage, transportation, and disposal of solid waste in Punjab. Pesticides manufacturing, formulation and repackaging of solid, liquids and granules are required to establish waste management systems that comply with these rules, ensuring that the project does not contribute to environmental degradation through improper waste handling.

#### **2.4.7 Punjab Water Act, 2019**

The Punjab Water Act governs water resources, including the extraction of groundwater and the management of water systems. For Pesticides manufacturing, formulation and repackaging of solid, liquids and granules, it is crucial to ensure that water use is sustainable, that stormwater is managed effectively, and that any new water extraction activities do not deplete local aquifers.

#### **2.4.8 Punjab Wildlife (Protection, Preservation, Conservation and Management) Act, 1974**

This law is applicable if the formulation unit of fertilizer and pesticides is located near any protected or sensitive wildlife habitats. It governs the protection and management of biodiversity, including native plant and animal species. If the project area affects such habitats, appropriate mitigation measures will need to be implemented.

#### **2.4.9 Forest Act, 1927**

If the project site is located in or near forested areas, this Act requires that the developer obtain permission before clearing any forested land. It regulates deforestation activities and mandates the preservation of forest cover wherever possible.

#### 2.4.10 Labor, Safety and Health Laws

These laws ensure the safety, health, and welfare of workers during construction activities. They set guidelines for workplace safety, worker health conditions, and risk management.

#### 2.4.11 Public Consultation Guidelines, 1997

This guideline emphasizes the importance of early and inclusive public consultation with stakeholders, especially with communities living near the project site. It mandates that affected populations and municipal bodies are consulted before finalizing project plans, ensuring that the community's concerns are addressed.

#### 2.4.12 Guidelines for Sensitive and Critical Areas

If the project site is located near sensitive or critical areas such as schools, hospitals, water bodies, wetlands, or areas of cultural heritage, these guidelines must be followed. They ensure that the project minimizes any adverse impacts on these sensitive environments.

### 2.5 Institutional Framework

The following institutions play key roles in regulating and overseeing environmental compliance for Pesticides manufacturing, formulation and repackaging of solid, liquids and granules in Punjab:

- **Punjab Environmental Protection Agency (Punjab EPA):** Enforces environmental laws, reviews and approves IEE/EIA reports, and ensures compliance with Punjab Environmental Quality Standards (PEQS) for emissions, noise, and waste management.
- **District Administration and Municipal Committees:** Grant local approvals, monitor land use compliance, and ensure that the facility aligns with local governance and community requirements.
- **Punjab Local Government Board:** Supervises urban development aspects, including infrastructure and service provisions related to industrial and fuel storage projects.

### 3 SCOPING

The scoping in Environmental Impact Assessment involves a comprehensive assessment of the potential impacts of a project or activity, including direct and indirect impacts, cumulative impacts, and potential long-term effects. This assessment is carried out by a team of environmental and social experts, who analyze the proposed project or activity in detail and identify potential risks and impacts on various aspects of the environment, such as air quality, water quality, biodiversity, and cultural heritage. In this Environmental Impact Assessment, a public consultation process is involved, where members of the public and other stakeholders can provide feedback and raise concerns about the proposed project or activity.

#### 3.1 Spatial and Temporal Boundaries of Environmental Assessment

Due to construction of the current project, land use will not change as land is industrial in nature. Within radius of 5-km, no industry can be seen but few commercial markets are there represents in figure given below but current project will be installed by adopting proper mitigation measures to avoid disturbance in nearby area and local community. In current project no significant emission will be observed because in proposed project there will be only storage. Wastewater quality will be measured to ensure PEQS. No environmentally sensitive area is present within safe distance that could be impacted due to proposed project.



110.38.160.195  
18/5/2026 11:44:39 AM

*June*

### **3.2 Important Issues and Concerns Raised during Consultation**

During consultation it was observed that many people were in favor of the project but some of the issues and concerns were raised. During survey following concerns of local community, Government Departments, Environmental Practitioners and Experts, nearby industries were noted:

- Local should be preferred for the job opportunities
- Proper training should be given to workers
- Noisy activities should be confined
- Air pollution should be controlled effectively
- There should be careful handling of storage devices
- Wastewater should not dispose of without proper treatment
- Solid waste must be collected timely
- Gas measurement devices should be used for continuous monitoring
- A proper wastewater treatment plant should be installed
- Ensure the tree plantation in the vicinity of area
- Health and safety of workers should be ensured
- EMMP should be designed and enforced with great spirit
- Respective team officers should be responsible for the implementation of management plan and actions
- Avoid the excessive use of groundwater. Limited amount of water should be use
- Cleanliness of area should be ensured
- To reduce or avoid air pollution transport vehicles should be covered in the construction phase
- Proponent shall work for betterment of community

### **3.3 Significant Impacts and Factors to be Determined**

The factors and impacts to be determined around the project site are:

- Dust and Particulate emissions
- Wastewater generation and its treatment

- Control Air emissions
- Solid waste management
- Occupational Health and safety
- Site Security
- Check and balance of storage unit
- Traffic Management
- Hygiene management
- Community impacts
- Job opportunities for locals
- Confined noisy activities.
- Resource conservation
- Avoid excessive water consumption.
- Energy efficient techniques must be adopted
- Proper site restoration after construction
- Tree plantation at designated green areas
- Emergency preparedness



EPA librarian.epa  
110.38.160.195  
18/5/2026 11:44:39 AM

---

## 4 Alternatives Consideration

The assessment for the proposed unit includes a detailed evaluation of project alternatives to ensure environmentally sustainable and socially responsible development. The alternatives have been examined with the intent to minimize adverse impacts while meeting the core objective of providing affordable and planned housing.

Alternative assessment plays a vital role in promoting more effective decision-making by identifying potential environmental and social implications at the earliest stage of planning. The alternatives considered encompass site selection, design and layout planning, environmental integration, and economic feasibility, with an emphasis on long-term sustainability and compliance with legal standards.

### 4.1 Site Alternatives

The proposed site for the Fertilizer and pesticides formulation unit was selected based on a combination of legal, geographic, and urban planning considerations. The land (343361 SFT) was earmarked for industrial use and duly approved by the relevant Development Authority.

Alternative sites were not pursued for the following reasons:

- \* The selected plot lies within the municipal limits, compatible with land use zoning and regional master planning guidelines.
- \* Away from key infrastructure such as schools, hospitals, road networks, and public utilities supports integrated community living.
- \* The land is non-agricultural, free from any protected ecosystems, water bodies, or heritage sites, thus minimizing ecological and cultural disruption.

Given these locational benefits and regulatory compatibility, no alternate site was found to offer similar viability and alignment with planning regulations.

## 4.2 Design and Layout Alternatives

Various design alternatives were evaluated during the planning phase of the Pesticides manufacturing, formulation and repackaging of solid, liquids and granules, with emphasis on operational efficiency, worker safety, environmental sustainability, and cost-effectiveness. The selected layout includes:

- \* Dedicated raw material and chemical storage areas with proper containment measures to prevent accidental leaks, spills, or cross-contamination.
- \* Strategically located formulation, blending, and packaging sheds, ensuring smooth movement of materials and efficient processing operations.
- \* Clearly defined storage zones, administrative offices, and utility areas, separating production activities from administrative functions to enhance safety and workflow.
- \* Provision of buffer zones and green areas within the premises to minimize environmental impacts, improve site aesthetics, and serve as safety setbacks in compliance with Punjab EPA guidelines and relevant industrial safety standards.

## 4.3 Environmental Alternatives

During the planning of the Pesticides manufacturing, formulation and repackaging of solid, liquids and granules, various environmental alternatives were considered to minimize potential impacts on air, soil, water, and nearby communities. These included:

- **Site Selection Alternatives:** Different locations were assessed to avoid ecologically sensitive areas, densely populated neighborhoods, and regions with groundwater vulnerability. The chosen site was selected for its safe distance from residential zones, accessibility to transportation routes, and minimal ecological sensitivity.
- **Technology and Equipment Alternatives:** Environmentally friendly and safer storage tanks with modern leak detection systems, pressure relief valves, and fire suppression mechanisms were preferred over conventional storage methods to reduce risks of leaks, emissions, and accidents.
- **Layout and Design Alternatives:** The final layout incorporated buffer zones, green belts, and impervious flooring in operational areas to reduce soil

contamination and improve safety. Proper drainage and spill containment systems were included to mitigate any accidental releases.

- **Operational Alternatives:** Adoption of strict safety protocols, scheduled maintenance, and emergency response plans was preferred over less-regulated operational practices, ensuring better environmental protection.

#### 4.4 Economic Alternatives

To enhance the project's economic viability and community benefits, several cost-effective and resource-efficient strategies were selected over conventional methods:

- \* Energy-Efficient Street Lighting: Adoption of LED lighting reduces operational energy use.
- \* Water Conservation Measures: Provision for rainwater harvesting and water-efficient plumbing fixtures.
- \* Job Creation: The project supports employment for engineers, architects, laborers, and service providers, stimulating the local economy.

These economic considerations not only reduce project costs but also provide long-term social returns, making the selected approach more sustainable and inclusive.

EPA librarian.epa  
110.38.160.195  
18/5/2026 11:44:39 AM

---

## 5 PROJECT DESCRIPTION

This Chapter presents the detailed project description along with project cost, land acquisition, implementation schedule, workforce and water requirements, etc.

### 5.1 Objective of Project

The main objectives of the project are:

- Establish a modern facility to manufacture a wide range of pesticides locally, ensuring farmers have easy and timely access to crop protection products.
- Support farmers in enhancing crop yields and minimizing losses caused by pests, diseases, and weeds through effective and reliable formulations.
- Promote innovation by developing new and improved pesticides manufacturings that are more efficient, targeted, and environmentally safe.
- Maintain strict quality control and adhere to national and international standards for safety, efficacy, and environmental protection.
- Implement eco-friendly production processes, safe waste disposal, and pollution prevention measures to minimize environmental impacts.
- Generate direct and indirect employment opportunities while contributing to local industrial development and the national economy.
- Provide technical guidance and awareness programs to promote safe handling, storage, and use of pesticides among farmers.

### 5.2 Location & Site Layout

#### 5.2.1 Site Location

The proposed formulation of fertilizer and pesticides by, Suncrop (Pvt) Limited, is located in the industrial estate periphery within the administrative jurisdiction of District, Punjab. The project area spans approximately 343361 SFT.

The site is strategically positioned to benefit from proximity to major transportation routes, public services, and urban infrastructure. It is:

- Accessible via main Road.

- Away from existing residential areas, educational institutions, and commercial zones.
- Free from ecologically sensitive areas, flood plains, and heritage zones.
- The land is non-forested, non-agricultural, and zoned for residential use. This ensures compliance with local zoning regulations and land use policies.

### **5.2.2 Site Coordinates**

The GPS coordinates of the project site are 30.1187928 N, 71.3791200 E site location map is attached in next.

### **5.3 Land use of the site**

The surrounding land is currently used for commercial purposes that aligns with the required land use.

### **5.4 Road Access**

The proposed project site is well-connected through paved roads, specifically providing direct and reliable access to the area. This road infrastructure is vital for facilitating the transportation of construction materials, machinery, and workforce during the development phase, and will also support smooth vehicular access. The road access enhances the project's feasibility and aligns with sustainable planning objectives. A detailed road access map is included to illustrate the site's connectivity with the surrounding transport network.



Figure 2 Rod Access Map

EPD Librarian.epa  
110.38.160.195  
18/5/2026 11:44:39 AM

*June*

## 5.5 Vegetative Features of Site

The project site features sparse to moderate vegetation, primarily consisting of native grasses, scattered shrubs, and a few trees like kikar and sheesham. No rare or protected plant species are present, and the area has historically been used for intermittent agriculture.

## 5.6 Plantation Plan

To enhance environmental sustainability and aesthetic appeal, the proposed project includes the plantation of approximately 1,000 to 2,000 trees and shrubs within and around the site. The plan emphasizes shade-providing, ornamental, and native species, ensuring long-term ecological balance and improved air quality.

### 5.6.1 Key Features

**Boundary Plantation:** Fast-growing, pollution-tolerant species such as Neem and Peepal will be planted along the perimeter for screening, dust control, and noise reduction.

**Ornamental Trees and Shrubs:** Selected for visual appeal, seasonal flowering, and biodiversity support.

**Native Species Priority:** Focus on low-maintenance, drought-tolerant plants suited to climate.

### 5.6.2 Maintenance Plan

- **Watering:** Efficient irrigation to meet species-specific needs and minimize water wastage.
- **Pruning & Trimming:** Regular maintenance to ensure healthy growth and landscape aesthetics.
- **Annual Evaluation:** Yearly health assessments with prompt replacement of dead or unhealthy plants.

### 5.6.3 Landscaping Considerations

- **Sustainability:** Use of natural fertilizers and drought-resistant species to reduce resource consumption.

- **Seasonal Variety:** Integration of flowering plants for year-round color and visual interest.
- **Soil Health:** Maintenance of fertility using organic methods to support long-term plant growth.

**Recommended Species**

S. No.	Common Name	Scientific Name	Benefits
1.	Neem	<i>Azadirachta indica</i>	Air purification, drought-tolerant
2.	Peepal	<i>Ficus religiosa</i>	Shade-providing, improves air quality
3.	Kikar	<i>Acacia nilotica</i>	Native, soil enrichment, fast-growing
4.	Shisham	<i>Dalbergia sissoo</i>	Timber value, soil stabilizer
5.	Siris	<i>Albizia lebbek</i>	Fast-growing, nitrogen-fixing
6.	Dherek	<i>Melia azedarach</i>	Ornamental, pollution control
7.	Bakain	<i>Melia azadirachta</i>	Aesthetic, hardy tree
8.	Mulberry	<i>Morus alba</i>	Provides shade, supports bird habitat
9.	Amaltas	<i>Cassia fistula</i>	Seasonal flowers, ornamental
10.	Bottlebrush	<i>Callistemon citrinus</i>	Attractive flowers, pollution absorber

**5.6.4 Plantation Impact Assessment**

The proposed Pesticides and fertilizer formulation unit, project site, consists mainly of open land with limited existing plantation, including a few scattered shrubs and small trees. Satellite imagery and on-site observations confirm that no dense or structured plantations currently exist within the project boundary. However, green patches are visible in surrounding areas, particularly toward the northeast and southeast.

### Potential Impacts:

**Vegetation Disturbance:** Minor vegetation may be removed during land development, especially in zones designated for infrastructure such as roads and utilities.

**Dust Emissions During Construction:** Dust generated from earthworks, vehicle movement, and material handling may temporarily affect surrounding greenery, particularly during dry or windy conditions.

**Soil Compaction:** Heavy machinery could compact soil, potentially affecting soil fertility and plant growth in adjacent areas.

### Mitigation Measures:

- ✓ Controlled and phased clearing of vegetation, preserving mature trees where feasible.
- ✓ Frequent water sprinkling during construction to suppress airborne dust.
- ✓ Use of green mesh barriers around the construction area to protect adjacent green patches.
- ✓ Post-construction plantation of native, shade-giving, and pollution-tolerant species along internal roads, plot boundaries, and open spaces.
- ✓ Development of green belts and community parks within the scheme to enhance overall greenery and reduce environmental footprint.

## 5.7 Magnitude & Cost of Project

The Proposed project spans a total area of, marking it as a significant urban development initiative in the region. The project carries an estimated total capital investment of 273.32 million PKR, covering land development, infrastructure construction, utilities installation, and operational setup. The financial plan includes all costs associated with ensuring operational safety and environmental protection, eliminating the need for separate allocations for these aspects. Strong emphasis will

be placed on the safe management of equipment and operations through rigorous and proactive practices. This integrated financial and operational planning underscores the project's commitment to both economic viability and environmental responsibility.

### 5.7.1 Cost Breakdown

Amenities	Cost
Land Cost	158.2 million
Construction Cost	94 million
Environmental Budget	4.9 million
Initial stock and machinery	16.22 million
<b>Total Cost</b>	<b>273.32 million</b>

## 5.8 Proposed Schedule of Implementation

### Stage I: Preliminary Phase

In the initial eight weeks, the site will be cleared, surveyed, and prepared for development. Feasibility assessments, soil testing, and basic site planning will be carried out, along with initial project documentation and mobilization plans.

### Stage II: Design and Approval Phase

Over the next 12 weeks, the detailed engineering design of the safety systems, and utility infrastructure will be finalized. Simultaneously, regulatory approvals and NOCs will be obtained from Punjab EPA, Civil Defense, and local authorities.

### Stage III: Construction and Infrastructure Development Phase

Spanning approximately 16 weeks, this phase involves civil construction, tank installation, sheds, parking, utility connections, and firefighting infrastructure. Core operational systems, such as drainage, spill containment, and electrification, will also be completed during this time.

### Stage IV: Equipment Installation, Testing & Operations Start

In the final 8 weeks, equipment installation, leak detection systems, safety inspections, and trial runs will be conducted. Operational staff will be recruited and trained, and after successful safety checks, the commissioning and official operations of the Fertilizer and Pesticides formulation will commence.

**Table 2 Schedule of Implementation**

ACTIVITY	TIME FRAME					
	Four Week	Four Week	Four Week	Four Week	Four Week	Four Week
Preliminary Phase						
Design Phase						
Approval Phase						
Construction Phase						
Infrastructure Development						
Equipment Installation & Testing						
Safety Inspection & Trial Runs						
Commissioning & Operations Start						
Commissioning & Operations Start						

## 5.9 Description of Project

### 5.9.1 Project Overview

The Suncrop (Pvt) Limited project proposed for formulation of fertilizer and pesticides, located at Kot Plot # 127 & 128, Phase II, Multan Industrial Estate District Multan, Punjab, is a planned residential community designed to meet the growing demand for quality urban living. Spanning 343361 SFT.

### 5.9.2 Process Description

The purpose of proponent is to establish a fertilizer and pesticides formulation unit to fulfill the basic needs of local community and to provide cost efficient products. The basic details of the process are given below:

#### Capacity:

Capacity of SC Formulation Plant	5000 Liters
----------------------------------	-------------

## **Detailed Process:**

### **i. Raw material handling and storage**

Active ingredients and solvents are received in sealed containers. They are stored in designated storage tanks or bins under controlled conditions. Proper labeling and segregation (solid, liquid, toxic level) is maintained to prevent cross-contamination.

### **ii. Formulation Process**

The next stage is formulation, which varies for liquid and solid products. For liquid pesticides, the required quantity of active ingredient is measured using load cells and added into mixing tanks containing solvents or carriers. Agitators are employed to disperse and homogenize the formulation. Surfactants, stabilizers, and adjuvants are added during this stage to enhance product performance. The final mixture is filtered and subjected to laboratory testing to verify viscosity, stability, and active ingredient concentration before transfer to storage tanks. For solid formulations, the active ingredients are weighed and thoroughly blended with inert carriers in storage bins. Depending on the formulation, granulation or milling may be carried out to achieve the desired particle size. Dust collectors are used during this stage to minimize emissions and maintain workplace safety. Finished powders are tested for flowability, dispersion, and particle size distribution.

### **iii. Refilling and packaging stage**

Liquid formulations are filled into bottles, cans, or drums using semi-automatic or automatic filling machines, then sealed, labeled, and packed in cartons. Solid formulations are dispensed into pre-measured sachets or pouches, sealed through automatic heat sealing, and packed for distribution.

### **iv. Final Product Storage**


After formulation and quality testing, the finished pesticides are transferred to dedicated storage areas. Liquid are stored in sealed containers within ventilated

chemical warehouses, while solid/powder products are packed in moisture-proof bags or pouches and kept in dry, temperature-controlled storage rooms. All storage facilities are equipped with labeling systems, fire safety measures, spill containment arrangements, and proper segregation of products to avoid cross-contamination.

Before dispatch, the products are inspected, labeled with batch numbers, manufacturing/expiry dates, and safety instructions, and packed in cartons for transportation.

**v. Dispatch to Market**

Dispatch to the market is carried out through authorized distributors and dealers under safe handling procedures, ensuring that the products reach farmers in compliance with regulatory, safety, and quality standards.

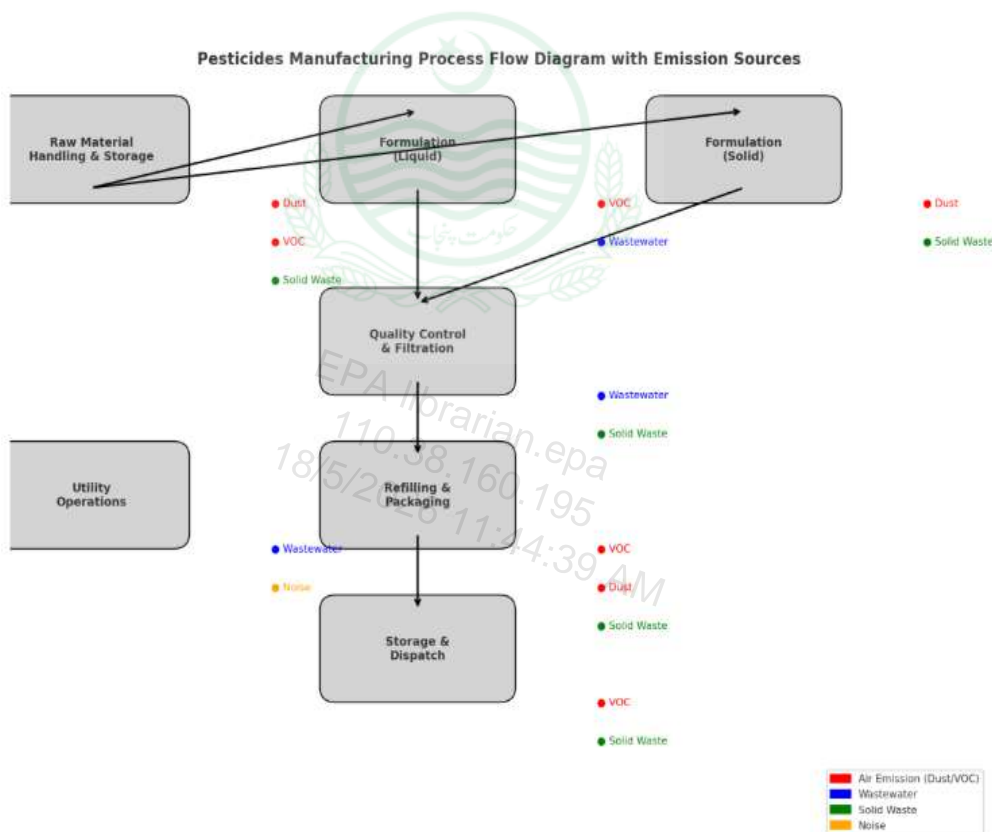

List of Liquid Pesticides Products	
Sr. #	Product Name
1	Fipronil



2	Lufenuron
3	Bifenthrin
4	Lambda Cyhalothrin
5	Quzilofof p Ethyl
6	Clothianidin
7	Chlorantraniliprole
8	Emamectin Benzoate
9	Chlopyrifos
10	Triazophos
11	Cypermrthrin
12	Carbosulfan
13	Dimethoate
14	Difenconazole
15	Diafenthiuron
16	Deltamethrin
17	Dichlorovas
18	Bromoxynil Octanoate
19	MCPA Isooctyl
20	Paraquate
21	Nitenpyram
22	Glyphosate
23	Azoxystrobin
24	Tebuconazole
25	Propiconazole
26	Prothioconazole
27	Chlorfenapyre
28	Atrazine
29	Mesotrione

**LIST OF SOLID PESTICIDES**

<b>List of Solid Pesticides Products</b>	
<b>Sr. #</b>	<b>Product Name</b>
1	Carbofuron
2	Cartap Hydrochloride
3	Monomehypho
4	Fipronil
5	Thiamethoxam
6	Clothianidin
7	Chlorantraniliprole

8	Emamectin Benzoate
9	Thiophenate Methyl
10	Imidacloprid
11	Acetamiprid
12	Tribenuron Methyl
13	Sulfosulfuron
14	Buprofezine
15	Acephate
16	Bispyrebac Sodium
17	Bensulfuron Methyl
18	Copper Oxy Chloride
19	Kasugamycin
20	Metalxyl
21	Mancozeb
22	Dimethomorph
23	Cymoxynil
24	Fostyl Aluminium
25	Flunicamid

**LIST OF MACHINERY FOR FORMULATION AND PACKAGING**

Sr. No	Description	Quantity / Availability
1.	Storage Tank	(5 ton capacity)
2.	Agitators/Mixer	(5 ton capacity)
3.	Product Charging Pump	3
4.	Product Transfer Pump	2
5.	Solvent Transfer Pump	1
6.	Liquid Flow Meter	1
7.	High Sheer Mixer (For SC)	1
8.	RO Plant (For SC)	(2 ton capacity)
9.	Bead Mill (For SC)	(Capacity 30 L)
10.	Water Bath (For SC)	1
11.	High Sheer Pump (For SC)	1
12.	Load Cells/ Weigh Scales	3

Sr. No.	Description	Quantity/ Availability
1.	Automatic measured quantity dispensing.	Available

2.	Pneumatic or ex-proof automatic	
3.	Automatic/ semi automatic heat sealing	Available
4.	Product Storage Bin	Available
5.	Dust Collector	Available
6.	Load Cells/ Weigh Scales	Available

## 5.10 Available Facilities

### 1. Workforce

Manpower demand estimation is an essential component to facilitate deployment of manpower. Project will be constructed in phases. Tentative workforce required for proposed project during the construction phase will be about 35-50 workers/employees. Unskilled labor should be hired locally.

### 2. Source of Water

It is supposed that water tanks will be used by the contractor on the site for construction activities. The source of water during the operation phase for the proposed project will be the ground water.

### 3. Water requirement

The water consumption for construction phase is estimated to be 15,000 liters/day of the proposed Project.

### 4. Wastewater Generation and Treatment Mechanism

The wastewater generation is estimated to be 12,000 liters/day of the proposed Project. Wastewater treatment system will be installed.

### 5. Solid waste

The solid waste generation is estimated to be 50-80 kg/day which will be collected at designated place.

## 6. Power requirement / power source

The main source of electricity/electric power will be Water & Power Development Authority (WAPDA).

## 7. Health, Safety, and Environmental Controls:

The facility will implement standard operating procedures (SOPs) for hygiene, emergency response, and safety. All workers will be provided with personal protective equipment (PPE), and training will be conducted regularly. Fire safety measures will include extinguishers, alarms, and a dedicated open emergency assembly area within the site boundary.

## 8. Personnel Protective Equipment (PPE)

To safeguard workers during both construction and operational phases, the following personal protective equipment will be provided, tailored to the specific activities undertaken:

- Protective goggles
- Leather or rubber safety shoes
- Gloves
- Face masks
- Helmets
- Overcoats

These measures emphasize the project's dedication to maintaining high standards of workplace safety, environmental protection, and operational efficiency, aligning with best practices and regulatory requirements.

## 5.11 Restoration and Rehabilitation Plan

The project is located within a residential area, but given the nature of the development, there are no significant concerns related to displacement or disruption to local residents. The project is designed to avoid the need for relocation or demolition of any existing structures, ensuring minimal impact on the surrounding

community. Therefore, there is no immediate need for restoration, rehabilitation, or relocation. The development will proceed in alignment with sustainable practices within the designated area. Over its estimated 25-year operational lifespan, all civil structures and infrastructure will undergo periodic renovations to maintain operational efficiency and safety standards, without requiring extensive rehabilitation or affecting the residential community.

### 5.12 Safety Signs/Safety Boards

Safety signage plays a crucial role in accident prevention and risk communication at the workplace. These signs and symbols, designed to be easily understood by all employees, are essential for conveying important safety information and instructions. The project will ensure that safety signs, symbols, and boards are prominently displayed across all departments, facilitating a culture of safety and awareness among workers and staff. This approach not only helps in mitigating hazards but also reinforces the project's commitment to maintaining a secure and health-conscious work.



### 5.13 Government Approvals and Leases

Compliance with environmental regulations is paramount, necessitating approval from the Environmental Protection Agency (EPA) of Punjab, as per Section 12 of the Punjab Environmental Protection (Amendment) Act 2012. The preparation of this report for submission to EPA Punjab is a critical step towards securing the necessary governmental endorsements to commence construction, underscoring the project's adherence to legal and environmental mandates.



EPA librarian.epa  
110.38.160.195  
18/5/2026 11:44:39 AM

## 6 DESCRIPTION OF ENVIRONMENT

Environmental baseline data study is essential while preparing EIA reports. The basic purpose is to establish a clear understanding of existing environmental conditions in project area and to identify potential impacts of proposed project. It refers to the collection of baseline information on biophysical, social and economic aspects of project location.

A site visit was conducted to survey the field area for collection of relevant data. Interviews were conducted with the public and stakeholders of the project area to seek the public opinion on the implementation of the proposed project. Various Governmental and Non-Governmental Organizations (NGOs) were also visited for the collection of relevant data and their views on the proposed project were recorded for incorporation into the EIA report. The environmental impacts of any activity or process will be assessed based on deviation from the baseline or normal situation. The following components form part of the baseline: -

- Physical Environment
- Ecological Environment
- Socio-Economic Environment

### 6.1 Physical Environment

This part examines the physical resources such as topography, soil, climate, surface and ground water resources and quality, ambient air quality and geology of not only the project site but also the city to assess whether the project under assessment can or does have any impacts on any of these parameters. Multan is a city in the Punjab, Pakistan. The city consists of tehsils Multan Saddar, Jalalpur Pirwala and Shahabad and other. It is a well-known cotton-growing area. Its approximate height above Sea level is 500ft. The fauna and flora of the area include: Ukkan, Kikar, Beri, Jand, van, and Karil. No special species of animal's worth mention are to be found. The demographical profile of city shows that the total area of the district is 3,721 square kilometers (1,436


sq. mi). Its elevation is about 122 m. According to Census 2017, the population is about 1.872 million. (Census Report 2017).

### 6.1.1 Geological Formation

This part examines the physical resources such as topography, soil, climate, surface and ground water resources and quality, ambient air quality and geology of not only the project site but also the city to assess whether the project under assessment can or does have any impacts on any of these parameters. Development wise, it is more developed than the other tehsils of district Multan: Multan Saddar, Jalalpur Pirwala and Shujabad. City became more famous nationally and internationally after the General Elections of 2013 when allegations of rigging were put by the Pakistan Tehrik-e-Insaaf in National Assembly Constituency NA-154.


### 6.1.2 Seismicity

Pakistan lies on an active seismic belt of earth. Seismic observations indicate that hundreds of shocks originate every year. Mostly, these seismic waves are of low intensity and do not have significant effect. According to seismic zones of UN- Habitat the project area falls under Zone 2A. The seismic zoning is shown in the figure.

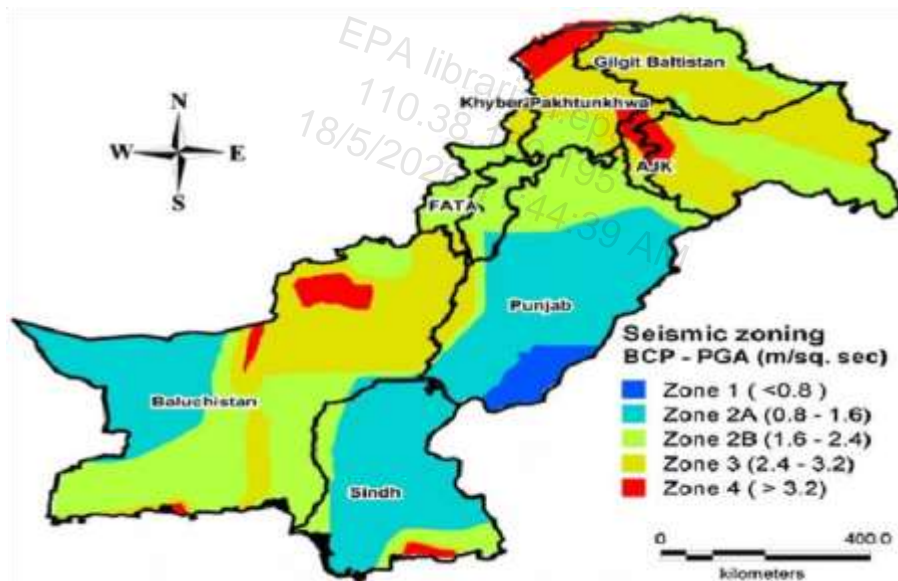

### 6.1.3 Climate

Climatically Multan is hot, arid, and very dry as it receives less than 125 mm of annual rainfall. May, June, and July are the hottest months and the mean maximum and minimum temperatures for these months are 42° C and 28 ° C respectively. Dust storms are a common occurrence in the city, and the monsoon rains, from June to September, can be severe.

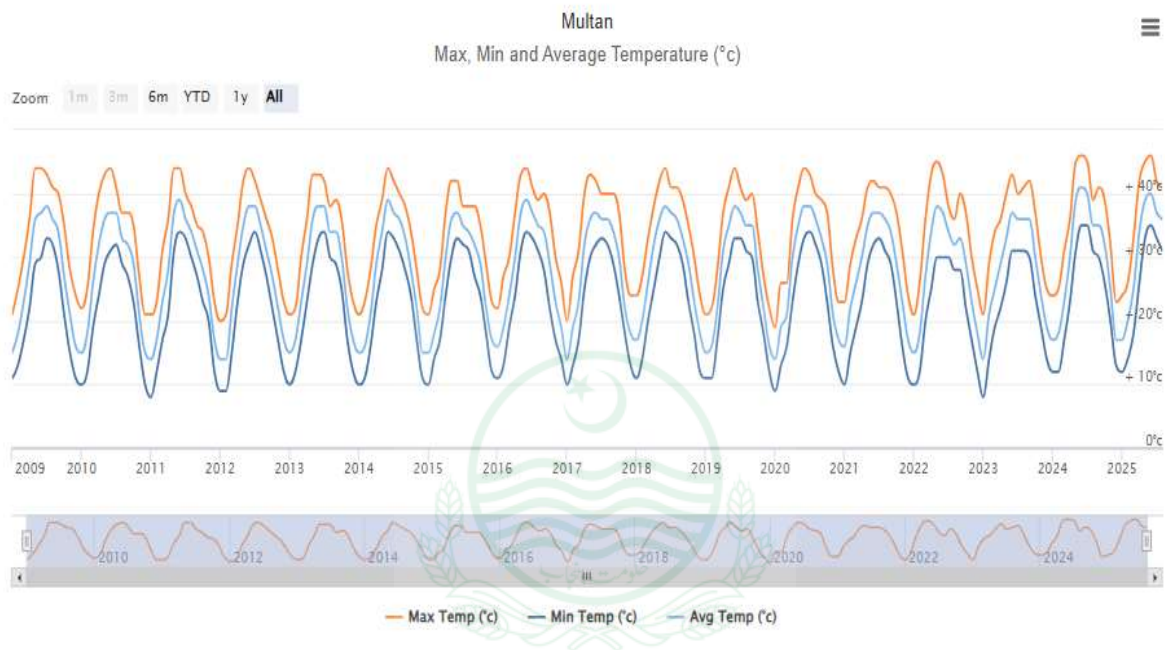

### 6.1.4 Season and Rainfall

Rainfall also varies markedly and it's predictably not certain from year to year. A wet year may be followed by a dry year. Rainfall in the regions mainly occurs in July and August when the monsoon depression travels westward. Precipitation has marked seasonal fluctuation. The average annual rainfall based on the 32 years observation is 125 mm (4.921 inches), almost all of which occurs in the two months of July and August (Reference: The 2004 Baseline Survey on Millennium Development Goals in AACs, Pakistan).

### 6.1.5 Temperature

The project area is semi-arid and characterized by large seasonal variations of temperature. The summer season lasts from April to September with an average temperature of 31.25°C (88.25°F). The extreme maximum and minimum temperature

*Signature*

in Summer being 48.0°C (118.4°F) and 9.0°C (48.5°F) respectively. During the winter months, the daytime temperature generally ranges between 19.4°C (67.02°F) to 33.9°C (93.02°F) and night temperatures are generally in the range of 4.8°C (40.64°F) to 17.7°C (63.96°F). Extreme minimum temperature sometimes reaches to -2°C (28.4°F). It generally begins to be active from mid-December and tends to concentrate over this region. In the fold of these disturbances sometimes well marked cold fronts are formed. (Reference: The 2004 Baseline Survey on Millennium Development Goals in AACs, Pakistan).

## **6.2 Environmental baseline modeling**

### **6.2.1 Noise Level**

Noise is described as an unwanted sound emitted from un-avoidable sources of anthropogenic activities. Daily based natural induced sources of noise are rare to none but human induced noise sources are plenty and un-avoidable. Physically, there is no distinction between sound and noise. Sound is sensory.

The perception and the complex pattern of sound waves is labeled noise, music, speech, low altitude aero plane flying etc. The noise pollution in the project area is source of pollution and nuisance. Among eight noise measurement locations in the cities, the study says, on average, the noise level ranged from 57-60 dB (A) in and around the project site.

### **6.2.2 Ambient Air Quality**

Atmospheric pollution means the imbalance in the normal air chemistry. It can occur due to the addition of a new chemical into atmosphere or by the change in concentration of the chemicals already existing in the atmosphere. Atmospheric pollution particularly in urban area has a strong impact upon daily life. The reasons of such changes can both be natural as well as anthropogenic. Ambient air quality is a key to measure the concentration of the various chemicals in atmosphere; especially of the chemicals which pose detrimental effects on health, safety, and

environment, to have a comparison with their safe concentrations, as established in WHO Standards and NAAQS.

### 6.2.3 Surface Water and Ground Water

There are no surface water resources like canal or ponds, near the project area. The area surrounding the project site is poorly drained. Ground water is the principal source of municipal water supply. This is also the case in the immediate vicinity of the site. The City’s drinking water is obtained from groundwater aquifer by means of tube wells located throughout the area. Groundwater is pumped from 60-65 ft. feet and is generally good for direct consumption.

## 6.3 Ecological Environment

In this section, the baseline environmental conditions pertaining to biological environment are described. These conditions have subsequently been used to identify the potential impacts on the biological environment that are likely to arise from the project activities.

### 6.3.1 Flora

There are no natural forest trees, grassland, or ecological important place. But the natural vegetation has been replaced by the agricultural crops. So, this sector consists generally of agricultural land irrigated by tube wells. Multan district is distinguished for its status in Agricultural production especially cotton and Mango. It has renowned Agricultural research institutes like i.e., Central Cotton Research Institute, Cotton Research Station, Mango Research Station, Agricultural College at Baha-ud-Din Zakria University.

Local Name	Scientific Name
Kikar	Acacia nilotica
Sufaida	Eucalyptus camaldulensis
Albizia lebbeck	Siris
Peepal	Ficus religiosa
Tahli	Dalbergia sissoo
Beri	Ziziphus nummularia

### 6.3.2 Fauna

The project area, on account of nature of vegetation and topography, is rich in vegetation and wildlife. Fauna of the project area consists of:

1. Mammals
2. Reptiles
3. Amphibians
4. Birds

The most common species are:

Local Name	Species
Quail	Coturnix coturnix
Owl Pigeon	Columbia Livia
Corvus splendens	House Crow
Ranatigrina	Frog

### 6.4 Socio Economic Environment

The project site is in industrial land; hence direct disturbance to communities will be minimum from the project activities. However, the physical extent of the study area extends up to 5km surrounding the proposed site (referred as project area) considering the physical, ecological, and socioeconomic boundaries beyond which the project is not likely to significantly influence local communities, and also with a view of covering a substantial sample size for collection of reliable and authentic socio-economic data.

#### 6.4.1 Study objectives

The socio-economic study undertaken for the Environmental Impact Assessment (EIA) was designed and conducted to meet the following objectives:

- To assess the human environment of the area i.e., to determine the Quality of life of communities within the Region of Influence.
- To have an insight into the day-to-day activities of people especially focusing on their income generating activities viz., agriculture and labor.

- To access the vulnerabilities of the local communities and the effects of project activities on their Quality of Life and Consultation with communities regarding the proposed project activities and to find out their concerns and aspirations.

#### **6.4.2 Resettlement patterns**

Different type of houses was observed in Multan during survey i.e., *katcha*, *pakka*, *semi pakka* etc having poor drainage system. Majority of people live within the village, a few in their farmhouses (Deras) while some make their homes on their agricultural land. So, there is no formal pattern of settlements. Family composition of both the villages is dominantly joint family system but a few nuclear families also exist in the area. Both the villages have the facility of electricity and Sui-gas. People use groundwater obtained via hand-pumps for drinking purposes without any treatment.

#### **6.4.3 Indigenous people**

People inhabiting the project area are of different castes and races. Most of the families have been living here in these villages from 20 to 25 years which has led to homogeneity of culture and the development of a closed economy. There is no danger or damage or elimination of indigenous community as the locals are steeped in their customs and have no intention of relocating.

#### **6.4.4 Religion, ethnic group and Cast Patterns**

99% communities of these villages are Punjabi speaking only 1% community belongs to other ethnic groups like Sraiki, Pashto etc. Religion plays an important role in the social structure of the society. Sunni Muslims is primarily inhabiting these two villages except a few families of Ahl-e-tasheh and Ahl-e-Hadees also lives here.

### **6.5 Quality of Life Value**

Overall, the social and physical infrastructure is not up to the mark in the project area. However, the project area is better as compared to the other rural areas of the province. A brief account of the education, health, infrastructure, and markets of the area is as follows:

### **6.5.1 Education**

The level of literacy is low as compared to the literacy rate of the district Multan i.e., 45%. Average education of the community is Primary. Though there are higher secondary government schools, private sector schools and colleges for girls and boys are also available near the vicinity of project area. People go to Multan and other cities of Pakistan for university education.

### **6.5.2 Health facility**

Basic Health Unit, Dispensaries and Private clinics exist in the surrounding villages of the project area. People also access to private hospitals in city and sometimes to nearby private dispensaries.

Fever, malaria and chest congestion, Hepatitis-C were reported as the common diseases of the project area. In the project area, health conditions are much developed.

### **6.5.3 Economy of Area**

District Multan is an industrial and commercial city having multi-occupations. The population of the area is having different occupation including government and private services as well as agriculture. The women also assist their men in the economic activity in different fields of business, service, education, and other institutions. Women mostly serve in schools, colleges, and hospitals.

Multan is generating many employment opportunities for its locals and outsiders. Industrial areas are using manpower, while nearby towns are providing business opportunities to the residents. In this semi urban area, people are involved in daily wages jobs, while some are involved in small business. They normally travel to adjacent areas for work. Some work in the industrial area and in the surrounding universities and colleges. People are also involved in agriculture. Area having access to irrigation water is another source of income. Similarly, livestock is a secondary source of income. It is safe to assume that livestock farming is practiced uniformly in both types of areas. Economy of the project area is dependent primarily on two occupations i.e., agriculture (maximum) and livestock (limited extent), while some locals are also involved in manual labor.

#### **6.5.4 Agriculture**

Agriculture is one of the most important economic activities in the project area. Major crops of the area are:

In **Rabi**: Wheat, Fodder, and some seasonal vegetables

In **Kharif**: Rice, Sugarcane, Fodder and Seasonal Vegetables

Irrigation in the area is primarily sustained through tube-well irrigation. Canals are the major sources of water supply for irrigation in the area.

#### **6.5.5 Livestock**

Livestock ownership has also developed in the project area; especially among poor families who sell animals during emergency days as mostly unemployed people depend on livestock and sometimes agriculture. The people have livestock which include cows, goats, sheep, and donkeys. All the animals are of native breed. Milk and butter from the livestock are consumed by the household and are sometimes sold in the market.

Good breeds of buffaloes and cows are found in the project area. Goats, horses, asses, and mules are also part of the livestock in these villages.

#### **6.5.6 Archeology and Cultural Sites**

There were no archaeological sites near the project area although nearest chaks do have mosques, graveyards and darbars

## 7 IMPACTS AND MITIGATION MEASURES

This chapter provides a review of the potential impacts of the Fertilizer and pesticides formulation unit located at Plot # 127 & 128, Phase II, Multan Industrial Estate District Multan over an area of 343361 SFT. The estimated cost for the subject project will be about 273.32 million PKR. These impacts could be both positive and negative and have been classified accordingly by a thorough review of the construction and operational phases of the project. This assessment numerates the magnitude of these impacts with the aid of environmental checklist and presents effective mitigation measures to counter their adverse nature.

### 7.1 Purpose of Environmental Mitigation Measures

Environmental mitigation measures are essential for ensuring the sustainable operation of the asphalt manufacturing unit, aligning with environmental compliance, and safeguarding ecological integrity. The rationale behind these measures is dissected through a series of critical inquiries:

#### 1. Identification of the Problem

The core issue arises when environmental resources are exploited unsustainably, leading to significant degradation. Such exploitation diminishes the environment's resilience and carrying capacity, severely impeding its natural recovery processes. In the context of the proposed project, this could manifest as pollution, habitat disruption, or resource depletion, directly impacting the local ecosystem's health and functionality.

#### 2. Timing for Addressing the Problem

The environmental impacts of the project will become apparent from the onset of construction activities and continue throughout the operational phase. These effects are not confined to the project site but may extend to surrounding areas influenced by project activities. Early identification and timely intervention are crucial for

preventing long-lasting or irreversible damage. Mitigation efforts should be initiated at the planning stage and integrated into all phases of the project lifecycle.

### **3. Location for Mitigation Efforts**

Mitigation strategies should be applied at the source of the environmental impact. This means implementing measures directly within the project site and, as necessary, in adjacent areas that might be affected by project-related activities. Focusing on the origin of potential problems ensures targeted and effective mitigation, reducing the overall environmental footprint of the project.

### **4. Approach to Addressing the Problem**

Addressing environmental issues necessitates adopting eco-friendly practices and technologies throughout the project's development and operation. Mitigation plans should include:

- **Resource Efficiency:** Minimizing the use of natural resources and promoting recycling and reuse to reduce waste.
- **Pollution Control:** Implementing advanced pollution control technologies and practices to minimize emissions, effluents, and waste generation.
- **Habitat Protection:** Avoiding or minimizing impacts on natural habitats and biodiversity, including the development of green belts and conservation areas.
- **Community Engagement:** Involving local communities and stakeholders in decision-making processes to ensure that mitigation measures address their concerns and benefit the local environment and population.
- **Monitoring and Compliance:** Establishing rigorous monitoring systems to assess the effectiveness of mitigation measures and ensure compliance with environmental regulations.

## **7.2 Impact Identification Methodology**

The methodology for identifying potential environmental impacts associated with the proposed facility involves a comprehensive approach. It includes:

**Review of Project Activities:** Detailed examination of all phases of the project to understand the range of activities and their potential environmental interactions.

**Environmental Study:** Assessment of the surrounding environment to identify sensitive areas, ecological value, and any existing vulnerabilities.

**Literature Review:** Analysis of existing studies, reports, and publications related to similar projects to draw parallels and learn from past experiences.

**Expert Judgment:** Utilization of insights from environmental experts to predict potential impacts based on their expertise and knowledge of similar projects.

### 7.3 Approaches for Mitigation Measures

Mitigation of environmental impacts involves several strategies:

- \* **Avoid:** Altering project plans such as route or site adjustments to protect ecological or archaeological features.
- \* **Replace:** Creating equivalent ecological habitats elsewhere if the original habitat is disturbed.
- \* **Reduce:** Implementing measures like filters, cyclones, noise barriers, and visual screening to lessen impacts.
- \* **Restore:** Rehabilitating the site post-operations to their original state or better.
- \* **Compensate:** Providing support to displaced communities or individuals through relocation, facilities, or financial means.

### 7.4 Impacts and Mitigation Measures due to Location

Development will permanently alter the existing land use from open land to industry, impacting the rural character of the area. Construction activities will generate dust and noise, potentially affecting nearby communities and air quality temporarily. Movement of construction materials and, later, residential traffic could increase congestion on local access roads.

#### Mitigation Measures

Allocate green areas, parks, and open spaces within the project to maintain environmental balance. Sprinkle water on unpaved areas during construction to control dust emissions. Use noise barriers or schedule high-noise activities during daytime hours to minimize disturbance. Ensure that construction machinery is fitted with appropriate noise suppression equipment. Implement landscaping plans that use native tree and shrub species.

## **7.5 Impacts and Mitigation Measures in Construction Phase**

### **i. Air Pollution**

#### **Impacts:**

During the construction phase, significant dust emissions are expected from activities such as land clearing, excavation, movement of vehicles, and material handling. Construction machinery powered by diesel engines will also release particulate matter (PM), carbon monoxide (CO), and nitrogen oxides (NOx) into the atmosphere, potentially deteriorating local air quality. Dust may cause respiratory problems among workers and nearby residents if left uncontrolled.

#### **Mitigation Measure:**

Dust emissions, one of the major concerns, will be controlled through regular water sprinkling on all unpaved roads, open construction sites, and storage areas, particularly during dry and windy conditions. Additionally, construction material transport vehicles will be covered with tarpaulin sheets to prevent dust dispersion. Machinery and equipment will be regularly maintained to ensure that emissions remain within permissible limits, reducing air pollution.

### **ii. Noise Pollution**

#### **Impacts:**

Construction activities, including excavation, operation of heavy machinery, and material transport, will generate high noise levels, potentially affecting the quality of

life of nearby residents and creating stressful working conditions for laborers. Prolonged exposure to elevated noise levels can cause hearing loss and increase stress.

### **Mitigation Measure**

Noise pollution will be mitigated by limiting noisy construction activities to daytime hours, especially in proximity to residential areas. Construction machinery will be fitted with silencers and sound-dampening equipment to minimize noise levels. Workers will be provided with ear protection gear such as earmuffs and earplugs, and a noise monitoring program will be initiated to ensure compliance with National Environmental Quality Standards (NEQS).

#### **iii. Soil Erosion and Degradation**

Excavation, land leveling, and uncontrolled surface runoff during construction can cause soil erosion, leading to sediment deposition in local water bodies and loss of fertile topsoil. The disturbed soil surface becomes highly vulnerable to erosion by wind and water.

### **Mitigation Measures**

To prevent this, temporary stormwater drainage channels and sediment control pits will be constructed around the site. Excavated soil will be stored properly with protective coverings to minimize erosion. Re-vegetation and re-compaction of exposed areas will be done promptly after construction activities to stabilize the soil.

#### **iv. Water Pollution**

### **Impacts:**

During the construction phase, accidental spills of fuels, lubricants, and other hazardous substances could pollute nearby surface water resources or groundwater. In addition, improper disposal of wastewater from construction camps and equipment washing areas could contaminate water bodies.

### **Mitigation Measures**

To mitigate this, all chemicals and fuels will be stored in designated areas with secondary containment. Mobile toilets and septic tanks will be provided for workers, and wastewater will be managed through proper drainage and treatment systems. Construction sites will be designed to minimize runoff carrying pollutants into natural drainage courses.

**v. Solid Waste Generation**

**Impacts:**

Solid waste will be generated from packaging materials, construction debris, leftover concrete, discarded steel, wood, and plastic materials. Improper disposal of such waste can create land pollution, visual nuisance, and health hazards.

**Mitigation Measure:**

A proper waste management plan will be implemented where waste materials will be segregated into reusable, recyclable, and non-recyclable categories. Authorized vendors will be hired for the collection, recycling, and disposal of waste. Efforts will also be made to reuse construction material, such as wood and scrap metal, to minimize waste generation.

**vi. Occupational Health & Safety**

**Impacts:**

The construction phase will expose workers to numerous health and safety risks, including falling from heights, injuries from machinery, exposure to hazardous chemicals, and accidents due to inadequate site safety. Without proper precautions, these risks could result in serious injuries or fatalities.

**Mitigation Measure:**

A comprehensive Health and Safety Management Plan (HSMP) will be developed and enforced. Workers will be provided with personal protective equipment (PPE) such as helmets, safety boots, gloves, high-visibility jackets, and safety harnesses. Regular

safety training sessions will be conducted, and first-aid kits and emergency medical services will be readily available onsite.

**vii. Flora and Fauna Disruption**

**Impact:**

Site preparation activities may require the removal of trees, shrubs, and other vegetation, leading to habitat loss for small wildlife species. The clearing of vegetation could also contribute to soil erosion.

**Mitigation Measures:**

To mitigate these impacts, vegetation clearance will be minimized as much as possible. Trees of significant ecological or aesthetic value will be preserved. After construction, compensatory plantation with native species will be undertaken to restore green cover and re-establish ecological balance in the area.



EPA librarian.epa  
110.38.160.195  
18/5/2026 11:44:39 AM

Basic Components	Duration	Location	Frequency	Extent	Significance	Nature
	Long	Short	Direct	Indirect	Continuous	Intermediate
Soil Erosion		✓	✓			✓
Air Quality		✓	✓		✓	
Ground Water Quality	✓			✓		✓
Noise Level		✓	✓		✓	
Wastewater Generation	✓		✓			✓
Solid Waste		✓	✓		✓	
Aesthetic		✓	✓		✓	
Flora	✓		✓			✓
Fauna	✓		✓			✓
Employment Rate	✓		✓		✓	
Economic Uplift	✓		✓		✓	
Health & Safety	✓		✓		✓	



EPA librarian.epa  
110.38.160.195  
18/5/2026 11:44:39 AM

*True*

## 7.6 Impacts and Mitigation Measure During Operational Phase

### i. Air Pollution

#### Impact:

During operation, vehicular movement of raw material supply trucks and product distribution vehicles may contribute to localized air emissions. Minor emissions of volatile organic compounds (VOCs) may also occur during pesticides manufacturing, mixing, and filling processes if not adequately controlled. Dust emissions from unpaved internal roads or material handling could increase particulate matter (PM), potentially affecting workers and nearby receptors.

#### Mitigation Measure:

- All internal roads, loading/unloading areas, and storage zones will be paved to minimize dust.
- Regular road cleaning and water sprinkling will be conducted, particularly in dry weather.
- Closed transfer systems, vapor recovery units, and leak detection equipment will be used to control VOC emissions during pesticides manufacturing and filling.
- Preventive maintenance of vehicles and machinery will be enforced to reduce exhaust emissions.
- Greenbelts with indigenous trees and shrubs will be developed around the facility to act as a natural buffer against dust and gaseous pollutants.

### ii. Solid Waste Generation

#### Impact:

Solid waste will mainly be generated from packaging materials (cartons, plastic bottles, bags), rejected or expired batches, office operations, and routine maintenance activities. Improper handling could lead to contamination of soil, air, and water, as well as unhygienic conditions.

**Mitigation Measure:**

- A solid waste management system will be implemented with segregation at source into recyclable, non-recyclable, and hazardous categories.
- Recyclable packaging waste (e.g., cardboard, plastic) will be sent to licensed recycling facilities.
- Hazardous waste (e.g., pesticide-contaminated containers, filters, rags) will be collected in secure labeled containers and disposed of at approved hazardous waste disposal sites.
- Staff will be trained in safe handling and disposal of pesticide-related waste.

**iii. Wastewater Generation**

**Impact:**

Wastewater will primarily be generated from equipment washing, floor cleaning, and sanitary facilities. Improper disposal of untreated wastewater may contaminate nearby soil and water resources.

**Mitigation Measure:**

- A wastewater treatment system will be installed to treat effluent before discharge.
- Treated wastewater will meet Punjab Environmental Quality Standards (PEQS) before disposal or reuse for greenbelt irrigation.
- Regular monitoring of effluent quality will be carried out to ensure compliance.
- Separate collection and neutralization systems will be provided for pesticide-contaminated wash water.

**iv. Noise Pollution**

**Impact:**

Noise may arise from vehicular movement, mixing equipment, pumps, compressors, and occasional use of generators. Continuous exposure could affect workers' health and nearby residents.

**Mitigation Measure:**

- Noise-generating machinery will be fitted with silencers and acoustic enclosures.
- Preventive maintenance will be practiced to keep equipment in good working condition.
- Pesticide mixing and packaging operations will be restricted to designated working hours.
- A green buffer zone with dense plantation will be maintained around the facility to act as a sound barrier.
- Noise levels will be regularly monitored to ensure compliance with PEQS standards.

**v. Traffic Congestion and Safety Issues**

**Impact:**

The movement of raw materials, distribution vehicles, and employee transport during peak hours could cause traffic congestion, safety risks, and potential delays in emergency response.

**Mitigation Measure:**

- The facility will maintain an internal road network with sufficient width, turning radii, and designated parking/loading areas.
- Speed limits and safety signage will be enforced throughout the premises.
- Separate pedestrian walkways will be provided for safe staff movement.
- Vehicle entry and exit will be regulated to avoid congestion during peak hours.
- A traffic and safety management plan will be implemented and updated periodically.

**vi. Visual and Aesthetic Impacts**

**Impact:**

Neglected landscapes, unmanaged waste, and deteriorating public spaces could harm the visual appeal and livability of the Pesticides manufacturing, formulation and repackaging of solid, liquids and granules.

**Mitigation Measure:**

A regular maintenance schedule will be followed for parks, green belts, and public areas. Landscaping will use native and drought-resistant plant species for easy maintenance and year-round aesthetics. Strict enforcement of architectural controls and façade guidelines for commercial units will ensure uniformity and aesthetic appeal across the Pesticides manufacturing, formulation and repackaging of solid, liquids and granules.



EPA librarian.epa  
110.38.160.195  
18/5/2026 11:44:39 AM

Basic Components	Duration	Location	Frequency	Extent	Significance	Nature
	Long	Short	Direct	Indirect	Continuous	Intermediate
Soil Erosion		✓	✓			✓
Air Quality		✓	✓		✓	
Ground Water Quality	✓			✓		✓
Noise Level		✓	✓		✓	
Wastewater Generation	✓		✓			✓
Solid Waste		✓	✓		✓	
Aesthetic		✓	✓		✓	
Flora	✓		✓			✓
Fauna	✓		✓			✓
Employment Rate	✓		✓		✓	
Economic Uplift	✓		✓		✓	
Health & Safety	✓		✓		✓	



EPA librarian.epa  
110.38.160.195  
18/5/2025 11:44:39 AM

*June*

## 7.7 Emergency Exits, Emergency Preparedness Plan, and PPE Details

### 1) Emergency Exits Details

- The facility will clearly mark emergency exits on all floors, ensuring at least two exits per production area.
- Fire-resistant doors will be installed to allow quick evacuation.
- Emergency exit maps will be displayed in key areas for easy navigation during evacuations.

### 2) Emergency Preparedness Plan

To ensure worker safety during emergencies, the unit will implement a structured Emergency Preparedness Plan, including:

#### a) Fire Safety Measures

- Fire alarms, sprinklers, and extinguishers will be installed at strategic locations.
- Regular fire drills will be conducted to train employees on evacuation procedures.
- Dedicated fire response teams will be trained to handle emergencies.

#### b) Chemical Spill & Hazardous Material Handling

- Chemical storage areas will be equipped with spill kits, absorbents, and neutralizers.
- Employees will be trained in chemical handling and spill response protocols.

#### c) Medical Emergencies & First Aid

- A fully equipped first aid station will be established within the facility.
- First aid training will be provided to staff, and medical response teams will be assigned.
- Emergency contact numbers and protocols will be displayed in all work areas.

### 3) Details of Personal Protective Equipment (PPE)

To minimize workplace hazards, employees will be provided with the following PPEs:

- **For General Safety:** Safety shoes, gloves, and protective clothing.
- **For Chemical Handling:** Chemical-resistant gloves, face shields.
- **For Air Quality Protection:** Dust masks and HEPA-filtered respirators for areas with air pollutants.
- **For Noise Reduction:** Earplugs or earmuffs in high-noise zones.
- **For Fire Safety:** Fire-resistant suits and gloves for designated personnel.

## 7.8 Environmental Enhancement Measures

Here are the environmental and safety measures:

- ✓ Workers will be trained in first aid and provided with medical facilities.
- ✓ Drugs and narcotics are prohibited during working hours.
- ✓ Machinery operators will wear proper protective gear.
- ✓ Water will be sprinkled on dusty roads and tracks.
- ✓ Personal Protective Equipment (PPE) will be provided during construction activities.
- ✓ Construction and domestic waste will be properly disposed of or utilized.
- ✓ Local communities will be informed in advance about construction work.
- ✓ Machinery will never be left unattended.
- ✓ Traffic management will be implemented to avoid disruptions, and overloading will be prohibited.
- ✓ Safety signs and boards will be displayed during construction.
- ✓ Standard Operating Procedures (SOPs) will be followed, along with Health, Safety, and Environmental (HSE) conditions.
- ✓ Native plants will be used to restore the area, and a tree plantation plan will be created.
- ✓ Solid waste will be handed over to contractors with an agreement.
- ✓ Noise levels will be controlled using appropriate measures.
- ✓ PPE will be provided to all workers.
- ✓ First aid facilities will be available at the site.

- ✓ All possible measures will be adopted to ensure the project is safe and environmentally friendly.
- ✓ Detailed planning for occupational health and safety (OHS) mitigation measures will be implemented.
- ✓ Employees will be trained in Environmental, Health, and Safety (EHS) policies and practices.
- ✓ Environmental management and compliance monitoring will be strictly followed.



EPA librarian.epa  
110.38.160.195  
18/5/2026 11:44:39 AM

## **8 ENVIRONMENTAL MANAGEMENT & MONITORING PLAN**

The Environmental Management and Monitoring Plan (EMMP) is a crucial component of the project's overarching strategy to ensure environmental sustainability and compliance throughout the construction and operational phases of said project. The primary aim of the EMMP is to effectively manage and mitigate adverse environmental impacts identified in the report, promoting environmental stewardship and sustainable development practices.

### **8.1 Objectives of the Environmental Management Program**

The objectives of the EMMP are multi-faceted, focusing on the comprehensive management of environmental aspects associated with the project:

- Defining Roles and Responsibilities
- Mitigation Measures
- Monitoring Mechanism
- Communication and Documentation
- Training and Capacity Building
- Management and Implementation

By addressing these objectives, the EMMP serves as a comprehensive guide for the project team to not only comply with regulatory requirements but also to adopt best practices in environmental management. This initiative-taking approach to environmental protection will help to minimize the project's ecological footprint, promote sustainability, and contribute positively to the local community and environment.

Table 3 Environmental Management Plan


Sr. #	Impacts	Mitigation Measure	Responsibility	
			Implementation	Monitoring
<b>Construction Phase</b>				
1.	<p><b>Soil Erosion &amp; Contamination</b></p> <p>Due to the proposed construction activities, soil erosion and contamination may occur. Soil erosion may occur on roadside and excavation of earth/cutting operations whereas contamination of soil may be caused by oil and chemical spills at asphalt plant sites, equipment washing yards, camp sites and temporary construction site office. This impact is, however,</p>	<ul style="list-style-type: none"> <li>• Excess spoil should be reused where possible and residual spoil can be disposed of at designated site to prevent erosion</li> <li>• Loss of topsoil can be avoided by stripping and storing topsoil prior to construction, then re-using it to cover the completed cell</li> <li>• Confining excavations to the specified spots as per the approved engineering drawings. Unnecessary excavations need to be avoided;</li> </ul>	Construction Contractor	Proponent

*June*

	temporary and low adverse in nature			
2.	<p><b>Air Quality and Dust</b></p> <p>Air quality will be affected by fugitive dust emissions from construction machinery; dust from the unpaved surface and construction vehicles. Emissions may be carried over longer distances depending upon the wind speed, direction, temperature of surrounding air and atmospheric stability. Besides, multifarious construction activities and increased vehicular traffic (construction vehicles) would also contribute to the</p>	<ul style="list-style-type: none"> <li>• All vehicles, machinery, equipment and generators used during construction activities should be kept in good working condition and be properly tuned and maintained in order to minimize the exhaust emissions</li> <li>• Preventive measures against dust should be adopted for on-site mixing and unloading operations;</li> <li>• Construction materials (sand, gravel, and rocks) and spoil materials will be transported through trucks covered with tarpaulins and all vehicles (e.g., trucks, equipment, and other vehicles that support construction works) will comply with</li> </ul>	Construction Contractor	Proponent

*sure*

	<p>localized airborne dust. The Suspended Particulate Matter (SPM) of the size smaller than 10 micrometre (PM<sub>10</sub>) tends to remain suspended in the environment for much longer and persistent time and is an environmental hazard. The objectionable impacts of settling of the suspended dust would be its dry deposition on vegetation, motor vehicles, structures, and other exposed surfaces. Similarly, exhausts from generators can also have impacts on air quality in the vicinity. The deteriorated ambient air quality may cause health hazards to the residents of nearby</p>	<p>the PEQS for carbon emissions and noise;</p> <ul style="list-style-type: none"> <li>• Regular water sprinkling of the site should be carried out to suppress excessive dust emission(s);</li> <li>• Emissions from power generators and construction machinery are important point sources at the construction sites. Proper maintenance and repair is needed to minimize the hazardous emissions</li> </ul>		
--	--	---	--	--

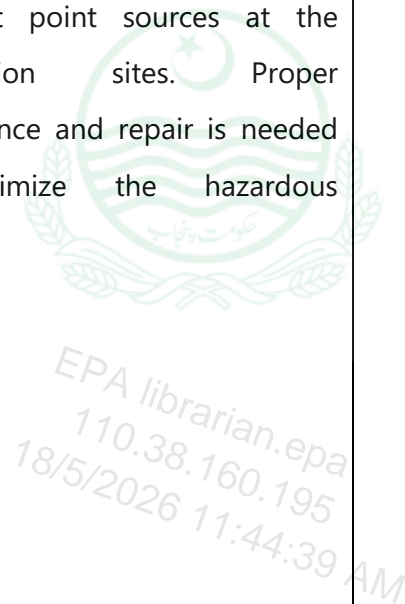  
 EPA librarian.epa  
 110.38.160.195  
 18/5/2026 11:44:39 AM

*June*

	residential colonies. The overall impact on the quality of air during the construction phase will be high adverse, however, it will be temporary and limited to the project's implementation phase only.			
3.	<p><b>Visual Aesthetics &amp; Landscape Changes</b></p> <p>Visual intrusion from large piles of excavated and construction material is one of the possible adverse impacts during the construction phase of the project. This impact is considered to be temporary and low adverse in nature.</p>	<ul style="list-style-type: none"> <li>Material stockpiles should be removed as soon as work is completed and the area re-landscaped. During work, these stockpiles should be covered with tarpaulin and watered regularly.</li> </ul>	Construction Contractor	Proponent
4.	<p><b>Noise and Vibration</b></p>	<ul style="list-style-type: none"> <li>The most common way to reduce the noise levels of common</li> </ul>	Construction Contractors	Proponent

*June*

	<p>The noise and vibration will be produced due to the operation of construction machinery equipment. Sources of noise and vibration during construction are heavy machinery. Noise and vibration are perceived as one of the most undesirable consequences of construction activity. The above machinery is expected to generate noise levels that would be severe in the Project Area. The noise and vibration may cause health hazards to the residents of nearby residential areas and sensitive receptors e.g. hospitals, educational institutes and mosques etc.</p>	<p>construction equipment is through worksite modifications.</p> <ul style="list-style-type: none"> <li>All workers who need to work within the zone must wear hearing protection</li> </ul>		
--	--	--	--	--



EPA librarian.epa  
110.38.160.195  
18/5/2026 11:44:39 AM

*June*

5.	<p><b>Solid Waste Generation</b></p> <p>Different type of waste is likely to be generated during the construction phase of the proposed Project. The municipal waste will be in the form of food, cans, paper and wastewater from construction camps toilets and washing yards. Construction waste will include excavated soil, sand, gravel, rocks, asphalt, pieces of concrete, bricks, wood, metal pieces and electrical wires. Whereas, hazardous waste can be comprised of paints and construction chemicals. All these, if left unattended, can become a</p>	<ul style="list-style-type: none"> <li>• Waste disposal plan must be reviewed during the entire construction phase</li> <li>• Solid Waste generated during construction will be safely disposed in demarcated waste disposal sites and the contractor will provide a proper waste management plan;</li> <li>• Construction waste such as waste wood can be recovered and recycled into wood for new building projects, and cement, bricks, and plaster can be crushed and reused in other construction and building projects</li> </ul>	Construction Contractor	Proponent
----	--	---	-------------------------	-----------

*June*

	source of nuisance and environmental pollution in the Project Area.			
6.	<p><b>Wastewater Generation</b></p> <p>Wastewater will be generated at the construction site by the workers. If the generated wastewater is not properly treated or disposed of, this may contaminate the surface water sources</p>	<ul style="list-style-type: none"> <li>• Proper monitoring to check the compliance of PEQS will be carried out</li> </ul>	Construction Contractors	Proponent
7.	<p><b>Flora &amp; Fauna</b></p> <p>No negative impact on the ecological environment will take place on account of cutting of any trees in the project area and clearing of vegetation from the site.</p>	<ul style="list-style-type: none"> <li>• Trees and ornamental plants shall be planted along the project boundary which will increase the aesthetic value of the site and will combat pollution.</li> <li>• Landscaping seemed to be a powerful mitigation activity with a positive impact.</li> </ul>	Construction Contractors	Proponent
<b>OPERATIONAL PHASE</b>				

*June*

8.	<p><b>Air Quality</b></p> <p>During the operational phase of the Pesticides manufacturing, formulation and repackaging of solid, liquids and granules, continuous movement of raw material supply trucks, product distribution vehicles, and employee transport may contribute to localized air pollution. Minor emissions of volatile organic compounds (VOCs) may also occur during pesticides manufacturing, mixing, filling, and transfer operations if not properly controlled. Dust emissions from unpaved internal roads, material handling, and</p>	<ul style="list-style-type: none"> <li>• Regular inspection and maintenance of vehicles and machinery to ensure compliance with Punjab Environmental Quality Standards (PEQS). Vehicles with excessive smoke emissions will be restricted from entry.</li> <li>• Use of closed transfer systems and leak detection mechanisms to minimize VOC emissions during formulation and packaging.</li> <li>• Paving of internal roads and routine water sprinkling to control dust emissions.</li> <li>• Development of greenbelts and roadside plantations with indigenous tree species capable of absorbing pollutants and acting as natural air filters.</li> </ul>	Regular Monitoring	Proponent
----	---	--	--------------------	-----------

*June*

	packaging activities could add to particulate matter (PM) levels, potentially affecting workers and nearby communities.			
9.	<p><b>Noise</b></p> <p>During the operational phase, the noise levels are anticipated to increase mainly due to traffic related noise pollution and due to commercial activities in the Project Area.</p>	<ul style="list-style-type: none"> <li>• Penalties should be imposed for the use of vehicles having faulty silencers; and</li> <li>• People should be educated to promote using of less horns e.g. by placing signboards at road side</li> </ul>	Regular Monitoring	Proponent
10.	<p><b>Wastewater</b></p> <p>Improper operation and maintenance of sewerage system may lead to illegal ingress of municipal solid waste into manholes/sewers, deposition of silt/sludge</p>	<ul style="list-style-type: none"> <li>• Solid waste bins/containers should be placed at appropriate location along the roads and in streets to avoid entrance of solid waste into sewers.</li> <li>• Residents should be educated not to throw solid waste in wastewater sewers.</li> </ul>	Regular Monitoring	Proponent

*June*

	<p>reducing capacity of sewers significantly, choking of sewer resulting in stagnant of wastewater in the streets or in low lying areas. Stagnant wastewater may cause inconvenience to pedestrians, foul smell, unhygienic environment and health issues.</p>	<ul style="list-style-type: none"> <li>• Installation of treatment plan for the treatment of wastewater</li> </ul>		
<p>11.</p>	<p><b>Solid Waste</b></p> <p>Solid waste management is a critical issue in the operational phase. Improper management of solid waste and accumulation of solid waste due to non-collection give rise to various severe issues to environment and health. Presence of solid</p>	<ul style="list-style-type: none"> <li>• An efficient and responsive general municipal solid waste collection, disposal, and management system should be strictly implemented</li> <li>• Waste bins should be provided at various convenient locations in the parks and the marketplaces for solid wastes by the passers-by. They should be regularly emptied and replaced, if found damaged and unserviceable.</li> </ul>	<p>Regular Monitoring</p>	<p>Proponent</p>

*June*

	waste heaps results in degradation of soil and land, choking of sewers if got way, create obnoxious odour	<ul style="list-style-type: none"> <li>• Throwing of garbage and solid wastes onto greenbelts or vacant plots should be prohibited and fine should be imposed in the case of noncompliance</li> </ul>		
12.	<p><b>Fauna</b></p> <p>There is no protected area, game reserve, game sanctuary, or national park in the project area so, no major impact on wildlife and livestock in the area is expected through noise, vibration, and any type of normal activity in the project area. This impact is Insignificant.</p>	<ul style="list-style-type: none"> <li>• Maintenance of the green areas and the protection of saplings to ensure better environmental conditions</li> <li>• Use of fertilizers should be strictly monitored in order to avoid any incident. Natural nutrients should rather be preferred</li> </ul>	Regular Monitoring	Proponent

*sure*

Table 4 Environmental Monitoring Plan

<b>ENVIRONMENTAL MONITORING PLAN</b>			
<b>Receptors</b>	<b>Monitoring Parameters</b>	<b>Monitoring &amp; Reporting Frequency</b>	<b>Responsibility</b>
Water Resources/ Water Quality	Monitoring of Physical, Chemical and Biological parameters and its compliance with PEQS, 2016 for surface water and drinking water.	Once before the start of construction activities; On quarterly basis during the construction phase; Bi-annually for at least one year during O&M phase; and Visual inspection daily.	Proponent/ Management
Soil Contamination	Soil contamination due to effluent / surface runoff and uncontrolled solid waste disposal activities at sites.	<ul style="list-style-type: none"> <li>• Once before the start of construction activities;</li> <li>• On quarterly basis during the construction phase;</li> <li>• Bi-annually for at least one year during O&amp;M phase</li> </ul>	Proponent
Dust Emissions	Monitoring of PM <sub>10</sub> and PM <sub>2.5</sub> and its compliance with PEQS, 2016 for Ambient Air.	<ul style="list-style-type: none"> <li>• Once before the start of construction activities;</li> </ul>	Proponent

*June*

		<ul style="list-style-type: none"> <li>• On quarterly basis during the construction phase;</li> <li>• Bi-annually for at least one year during O&amp;M phase</li> </ul>	
Noise Pollution	Monitoring of Noise Level and its compliance with PEQS 2016 for Noise.	<ul style="list-style-type: none"> <li>• Once before the start of construction activities;</li> <li>• On quarterly basis during the construction phase;</li> <li>• Bi-annually for at least one year during O&amp;M phase</li> </ul>	Proponent
Ecological Resources	Disturbance to natural habitat and uncontrolled floral cutting which can be avoidable.	<ul style="list-style-type: none"> <li>• Start of construction activities;</li> <li>• Visual inspection daily / weekly during construction phase</li> <li>• Annually for at least one year during O&amp;M</li> </ul>	Proponent
Safety of workers	Medical record of workers	<ul style="list-style-type: none"> <li>• On quarterly basis during the construction phase.</li> </ul>	<ul style="list-style-type: none"> <li>• Contractor</li> </ul>
Restoration of work sites	Site cleared and no solid and construction waste along the alignment	<ul style="list-style-type: none"> <li>• After completion of construction work</li> </ul>	<ul style="list-style-type: none"> <li>• Contractor</li> </ul>

*sure*

## 8.2 Training of Workers

Prior to the commencement of project activities, an environmental and social training and technical support program will be implemented for Proposed project. This program is essential to strengthen institutional capabilities and ensure effective management of environmental and social aspects throughout the project lifecycle.

Building environmental awareness and providing relevant technical knowledge to the Contractor's workforce is crucial for the successful execution of the Environmental Management Plan (EMP). Without adequate training, the workforce may lack the understanding and skills necessary to implement the required environmental protection measures effectively.

Management will be responsible for engaging a Technical Assistance (TA) consultant to design and deliver comprehensive environmental and social training sessions.

The key objectives of the TA program will be:

- To assist in the development and establishment of effective environmental and social management systems;
- To deliver targeted training to senior management, contractors, subcontractors, and supervision consultants involved in environmental and social planning and management during both construction and operational phases; and
- To conduct specialized training modules covering monitoring techniques for air quality, water quality, and noise pollution.

**Table 5 Training Schedule**

Participants	Date, Time & Location	Training Topics	Schedule	Responsible Authority
--------------	-----------------------	-----------------	----------	-----------------------

Staff of project and the contractor	As specified	<ul style="list-style-type: none"> <li>• Introduction to project EIA/IEE and EMMP</li> <li>• EMMP communication, documentation, monitoring, and reporting requirements</li> </ul>	Every month	Project Manager
All site personnel	As specified	<ul style="list-style-type: none"> <li>• Site induction training on HSE system and requirements at Incinerating Site</li> <li>• Environmental sensitivities of the project area</li> <li>• Communication of environmental problems to corresponding officials</li> </ul>	After every week	Project Manager
Drivers	As specified	<ul style="list-style-type: none"> <li>• Road safety</li> <li>• Road restrictions</li> <li>• Vehicle restrictions</li> <li>• Waste disposal.</li> <li>• Defensive driving</li> </ul>	After every 3 months	Project Manager
Camp Staff	As specified	<ul style="list-style-type: none"> <li>• Camp operations.</li> <li>• Waste disposal.</li> <li>• Good housekeeping</li> </ul>	Monthly	Project Manager

### 8.3 Environmental Management Team

The successful implementation of the Environmental Management and Monitoring Plan (EMMP) for the project hinges on the coordinated efforts of a dedicated environmental management team. This team comprises various functionaries, each

with distinct roles and responsibilities throughout the construction and operational phases of the project.

### **8.3.1 Key Members of the Environmental Management Team:**

#### **Proponent:**

Serves as the project proponent and owner of the Environmental Management Plan, overseeing its execution during both construction and operational stages.

#### **Project Contractor(s):**

Act as executors of the EMMP during the construction phase, responsible for integrating environmental mitigation measures into project activities.

#### **Operational & Maintenance & Health, Safety, and Environment Team:**

Execute the EMMP during the operational phase, ensuring ongoing compliance with environmental standards.

#### **Environmental Protection Agency (EPA), Punjab:**

Functions as the regulatory body for reviewing and monitoring the project's compliance with environmental remediation and mitigation measures outlined in the report.

### **8.3.2 Responsibilities of Functionaries:**

#### **a) Project Management:**

Charged with overall environmental supervision, monitoring progress, overseeing mitigation measure implementation, documentation, training program development, and reporting on EMMP status.

#### **b) Project Contractor**

Responsible for adhering to all EMMP provisions, and environmental codes of conduct, and ensuring workers are equipped with and trained in the use of Personal Protective Equipment (PPE).

#### **c) Environmental Protection Agency (EPA):**

Reviews and monitors the project's adherence to the EIA's remedial and mitigation strategies.

## 8.4 Equipment Maintenance Details

A well-organized maintenance program is critical for ensuring the safety and efficiency of all tools, equipment, and vehicles used in the project. Regular inspections and adherence to safety regulations are mandatory to prevent accidents and injuries.

## 8.5 Proposed Environmental Monitoring

Environmental monitoring is vital for assessing the project's compliance with environmental regulations and its effects on the environment. It is divided into: Compliance Monitoring: Ensures the project's adherence to EIA and EMMP requirements through routine inspections and site monitoring.

Effects Monitoring: Identifies unanticipated impacts or those exceeding anticipated levels, allowing for the timely implementation of additional mitigation measures.

### 8.5.1 Monitoring Components:

Comprehensive baseline monitoring will be conducted across several key environmental parameters, including:

- Noise Levels
- Ambient Particulate Matter
- Ambient Air Gases
- Ground Water Quality
- Wastewater Quality
- Soil Contamination
- Solid Waste Management
- Vehicular Traffic and Emissions
- Flora & Fauna
- Health & Safety Practices
- Machinery and Equipment Maintenance

By establishing a robust environmental management framework, the project aims to minimize its environmental footprint, ensure the safety of its workers, and contribute positively to the local ecosystem and community.

## 8.6 Environmental Budget

Table 6 Environmental Budget

Environmental Component	Quantity	Amount Pak Rs.	Details/Basis
Landscaping/Plantation	1000-2000 approx.	1.5 million	Cost includes plantation and maintenance up to three years
Solid waste management	L.S	1.5 million	Lump Sum
Health & Safety Measures	L.S.	0.5 million	Lump sum
Wastewater management	L.S.	1.5 million	Lump sum
Miscellaneous Cost	L.S.	02 million	Lump sum
Air Quality Monitoring	2	12,000	2 samples @ 6000/sample
Water Quality Monitoring	2	12,000	2 samples @ 6000/sample
Noise Level Monitoring	2	10,000	2 samples @ 5000/sample
Soil Tests	2	10,000	2 samples @ 5000/sample
Training		15,000	Lump sum
External Monitoring		100,000	
<b>Total Environmental and Social Management Cost</b>		<b>09 million PKR</b>	

## 9 STAKEHOLDER CONSULTATION

Stakeholder consultation is a critical component in the environmental assessment process for the proposed project. It fosters communication among diverse groups, facilitating information exchange, feedback collection, and collaborative decision-making.

### 9.1 Benefits and Objectives of Stakeholder Consultation

Engaging with stakeholders offers several advantages, including improved project understanding, identification of environmental concerns, and incorporation of local insights into project planning. Key objectives include:

- **Enhancing Understanding:** Clarifying the project's aims and potential impacts to ensure stakeholders are well-informed.
- **Addressing Concerns:** Identifying and resolving stakeholder issues to prevent opposition and build consensus.
- **Building Trust:** Establishing a foundation of trust and cooperation between the project Proponent and stakeholders.
- **Informed Decision-Making:** Leveraging stakeholder input to make informed decisions regarding project design and implementation.

### 9.2 Identification and Classification of Stakeholders

A comprehensive stakeholder identification process was undertaken to recognize all parties with a personal stake in the project, classified as:

- **Industries:** Businesses and institutions directly affected or influential to the project outcome.
- **Local Communities:** Residents and groups in proximity to the project site are likely to experience its direct impact.

### 9.3 Views, Concerns, and Suggestions of Various Stakeholders

Stakeholder feedback highlighted several areas of concern and interest:

- **Environmental Preservation:** Emphasis on minimizing tree removal and establishing green zones.
- **Local Employment:** Dedicated support for prioritizing local residents in hiring processes.
- **Dust and Air Pollution Control:** Recommendations for regular dust suppression measures and continuous air quality monitoring.
- **Noise Management:** Suggestion to limit noise-generating activities to daytime hours.
- **Solid Waste Management:** Advocacy for proper waste disposal techniques to mitigate environmental impacts.

### 9.4 Methodology for Consultation

The consultation process involved a dynamic exchange of ideas through discussions, meetings, and field visits, aimed at:

- **Scoping Sessions:** Initial meetings to define project scope and identify key stakeholder concerns.
- **Focus Group Discussions:** In-depth conversations with local communities and government representatives to gather detailed feedback.
- **Location-Based Meetings:** Engagements held at various sites to ensure broad stakeholder participation and input.

This stakeholder consultation process underscores the project's commitment to environmental stewardship, community engagement, and sustainable development. By incorporating stakeholder feedback into the process, the project aims to achieve a balance between development objectives and environmental conservation, fostering positive relationships with all affected parties.

## 9.5 Environmental Management Team and Experts

Sr. #	Managers	Responsibilities
1.	<b>Contract Manager</b>	<ul style="list-style-type: none"> <li>• Implementation of EMP</li> <li>• Environmental issues identification during pre-construction phase.</li> <li>• Communication EMP to all employees.</li> </ul>
2.	<b>Contractor</b>	<ul style="list-style-type: none"> <li>• Ensure that the control measures identified during environmental surveys are implemented as they are relevant to their work/visit.</li> <li>• Ensure that the project management team is notified of any non-conformance of control measures or environmental incidents where the environment has been put at risk.</li> </ul>
3.	<b>Site Manager</b>	<ul style="list-style-type: none"> <li>• Ensure site material and safe handling of hazardous waste.</li> <li>• Controlled access arrangement to avoid hazards.</li> <li>• Emergency egress arrangements to avoid any unfortunate incident.</li> <li>• First aid facilities/services should be readily available on-site.</li> </ul>
4.	<b>Site HSE Advisor</b>	<ul style="list-style-type: none"> <li>• Ensure good standards of workmanship.</li> <li>• Engaged health and safety to devise site waste management plan to be followed and implemented.</li> <li>• Daily checks &amp; weekly checks.</li> <li>• Regular consultation with workers.</li> </ul>
5.	<b>Site Environment Advisor</b>	<ul style="list-style-type: none"> <li>• According to legislation and consent develop EMP.</li> <li>• Ensure application of EMP.</li> <li>• Conduct regular site inspection.</li> </ul>
6.	<b>Public Contact Officer</b>	<ul style="list-style-type: none"> <li>• First point of contact for members of the public.</li> <li>• Arrange and manage public forums.</li> <li>• Maintain relation with stakeholder</li> </ul>

## 9.6 The Responsible Authority for EMP Implementation

The successful implementation of the Environmental Management Plan (EMP) is a pivotal aspect of ensuring the environmental integrity and sustainability of the proposed unit. The ultimate responsibility for overseeing and ensuring the effective execution of the EMP lies with the project Proponent.

### Appointment of an HSE/Project Manager

To facilitate this, the project Proponent will appoint a Health, Safety, and Environment (HSE)/Project Manager possessing the necessary qualifications and expertise. This individual will assume the role of Environmental Manager, tasked with the comprehensive management of all health, safety, and environmental conditions as per the Punjab Environmental Quality Standards (PEQS).

### Responsibilities of the HSE/Project Manager

As Environmental Manager, the HSE/Project Manager's responsibilities will encompass a broad spectrum of duties, designed to ensure that the project not only complies with all relevant environmental regulations but also adopts best practices in environmental stewardship.

## 9.7 Environmental Practitioners and Experts

Consultation with Environmental Practitioners and experts was done, and the following comments and suggestions were noticed.

**Table 7 Environmental Consultant Team**

Sr. No.	Name	Designation	Comment/ Suggestions
1.	Sara Fatima	Senior Environmentalist	<ul style="list-style-type: none"> <li>She said that the project will have a positive impact on the economy, but its construction should be done in an environmentally friendly way.</li> <li>Basic facilities should be provided to local community</li> </ul>

2.	Zia Ur Rehman Farooqi	Ph.D. Scholar Environmental Sciences	<ul style="list-style-type: none"> <li>• Tree plantation in designated green zones should be conducted.</li> <li>• Proper disposal of the solid waste</li> <li>• HSE management measures should be adopted and implemented effectively</li> </ul>
3.	Dr. Hina Ahmed Malik	Ph. D Environmental Sciences	<ul style="list-style-type: none"> <li>• He said that locals should be preferred for employment.</li> <li>• Value addition of area. Proper mitigation measures must be adopted while construction and operation of this project</li> </ul>
4.	Engr. Kanza Fatima	Junior Environmentalist	<ul style="list-style-type: none"> <li>• Waste must be collected and disposed of properly.</li> <li>• Ensure the use of PPE's during the operational activities.</li> <li>• Wastewater should be treated.</li> <li>• Ensure the tree plantation</li> </ul>
5.	Engr. Aleeza Kanwal	Junior Environmentalist	<ul style="list-style-type: none"> <li>• Health and safety department and trained people should be there in case of any emergency.</li> <li>• Periodic monitoring of every fire extinguisher (expiry date, type)</li> </ul>
6.	Hasham Fatima	Environmental EPA Islamabad 10.38.160.195 18/5/2026 11:44:39 AM	<ul style="list-style-type: none"> <li>• A proper traffic management plan should be developed to control vehicle movement, minimize road congestion, and ensure safety of local residents during construction and operation phases.</li> </ul>
7.	Engr. M. Bilal	Environmental Engineer	<ul style="list-style-type: none"> <li>• It should be ensured that the pollution abatement technique</li> </ul>

## 9.8 Other Departments and Agencies

Following officers of government departments were consulted by the socio-environmental team of the consultants and concerned details about the project were

noted down through personal interviews, group meetings, etc, in their offices, for instance.

Sr. No.	Designation	Concerns
<b>1.</b>	<b>Environment Protection Department (EPD)</b>	
	General Manager	<ul style="list-style-type: none"> <li>• Solid waste should be managed in Environmentally friendly manner.</li> <li>• Wastewater should be treated effectively &amp; approval should be acquired from concerned agency before disposing off in nearby drain.</li> <li>• HSE* at the site should be managed effectively.</li> <li>• No impact is being foreseen due to the selected location.</li> <li>• Locals should be given job opportunity.</li> </ul>
	Environmental Inspector	
<b>2.</b>	<b>Social Welfare Department (SWD)</b>	
	Deputy Director Officer	<ul style="list-style-type: none"> <li>• Final goods should be affordable for the locals.</li> <li>• The proposed product should facilitate locals and they should be economical.</li> <li>• Job opportunities should be given to the locals.</li> <li>• Wages should be given according to the work assigned to them.</li> <li>• Life insurance of the workers should be given as well as all the facilities should be given as per labor laws.</li> </ul>
<b>3.</b>	<b>Irrigation Department</b>	
	Subdivision	<p>Following comments were suggested:</p> <ul style="list-style-type: none"> <li>• Untreated wastewater should not be disposed of in the nearby drains without proper treatment.</li> </ul>
	Executive Engineer	

		<ul style="list-style-type: none"> <li>Beneficial as job opportunities will be available to the residents.</li> </ul>
<b>4.</b>	<b>Forest Department</b>	
	District Forest Officer	<p>Following recommendation were suggested by the forest department:</p> <ul style="list-style-type: none"> <li>Plantation and landscape activities should be conducted on a broader scale.</li> <li>Proper drainage system must be available at site</li> </ul>

### 9.9 Consultation with Affected and Wider Community

In addition, the use of direct methods to evince the response of the various stakeholders in targeted population residing in study area was ascertained by conducting a sample survey, through specially formatted questionnaires. Questions posed to the public were related to the creation of impacts, adverse impacts, and beneficial impacts, including employment opportunities, income generation activities, change in living standards and provision of the basic amenity.

Personal views of the respondents on the establishment of proposed project disturbance to the residents near the AOI and infringement of their privacy were also recorded. Various rounds of public meetings and consultations were arranged in the project and study area. The stakeholder category involves nearby residents, different industries, shopkeepers. The issues discussed with them are mostly related to the following:

- Activities of project.
- Impacts caused due to certain activities during construction and operational phase.
- The proposed mitigation measures.



---

## 10 RAINWATER HARVESTING SYSTEM

To promote sustainable water management and reduce dependence on groundwater, a rainwater harvesting system will be integrated into the Pesticides manufacturing, formulation and repackaging of solid, liquids and granules. The system will be designed to capture, store, and utilize rainwater from building rooftops, paved areas, and open surfaces within the facility.

### Key Features:

- **Collection System:** Rooftop rainwater will be collected through a network of gutters and downpipes fitted with mesh filters to prevent entry of debris. Runoff from paved areas will be directed into surface drains leading to the harvesting system.
- **Filtration Unit:** Before recharge or storage, rainwater will pass through a multi-layer filtration system consisting of gravel, sand, and activated charcoal to remove suspended solids and impurities.
- **Storage Tanks:** Dedicated storage tanks will be constructed to store filtered rainwater. Stored water will be used for non-potable applications such as floor washing, equipment cleaning, cooling systems, and greenbelt irrigation.
- **Groundwater Recharge:** Excess rainwater will be directed to recharge pits/galleries lined with layers of sand, gravel, and boulders to allow percolation into the groundwater aquifer.
- **Overflow Management:** In case of heavy rainfall, an overflow arrangement will be provided to safely channel excess water to the stormwater drainage network.

### Benefits:

- i. Reduction in dependence on groundwater abstraction.
- ii. Supplementary water source for industrial utilities and landscaping.
- iii. Enhanced groundwater recharge and aquifer sustainability.
- iv. Control of surface runoff, reducing risk of localized flooding.
- v. Contribution towards environmental sustainability and regulatory compliance.

## 11 CONCLUSION

The project aims the development of fertilizer and pesticides formulation unit. The project falls under the category of projects requiring Environmental Impact Assessment (EIA).

At the end of this study, it has been found that:

- There are no sensitive elements/segments of environment around the project site.
- It has also developed ways and means for environmentally sustainable disposal of solid wastes to be generated from the project operations.
- The noise levels will be kept well within the required limiting values of the NEQS Pakistan.
- This project will create job opportunities during construction and operation stages leading towards reduction of poverty.
- Sewage will be passed through Septic Tanks before final treatment and disposal.
- It will help in the improvement of the community in the local area. It will also provide such facilities for people from other places.
- Project site means the development criteria like electricity supply, gas supply, water supply and sewage system.
- EMP, as recommended in this EIA Report, is to be put in place during all operational stages of the project.
- Environmental monitoring by the project proponent and a third party also ensures that the project will run in accordance with legal requirements.

Based on these findings of the EIA Report the project merits the issuing of Environmental Approval by the Environmental Protection Agency, Government of Punjab, and Lahore.

**GLOSSARY**

<b>Accommodate</b>	(of a building or other area) provide lodging or sufficient space for. "The cottages accommodate up to six people"
<b>Assessment</b>	The action of assessing someone or something. "The assessment of educational needs"
<b>Aspects</b>	A distinct feature or element in a problem
<b>Adverse</b>	- Preventing success or development; harmful; unfavorable. "Taxes are having an adverse effect on production"
<b>Authorized</b>	- having official permission or approval. "An authorized dealer"
<b>Amendment</b>	a minor change or addition designed to improve a text, piece of legislation, etc. "an amendment to existing bail laws"
<b>Ambient Air</b>	Ambient air quality refers to the quality of outdoor air in our surrounding environment. It is typically measured near ground level, away from direct sources of pollution
<b>Archaeological</b>	the scientific study of material remains (as fossil relics, artifacts, and monuments) of past human life and activities
<b>Annunciation</b>	A formal public statement
<b>Baseline</b>	The existing conditions against which impacts of the proposed action and its alternatives can be compared.
<b>Crushing</b>	Deform, pulverize, or force inwards by compressing forcefully. "You can crush a pill between two spoons"
<b>Containers</b>	An object for holding or transporting something. "The cakes will keep for up to two weeks if kept in an airtight container"
<b>Compliance</b>	Acting according to certain accepted standards
<b>Discrepancies</b>	A difference between conflicting fact, claims or opinions
<b>Disposal</b>	the action or process of getting rid of something
<b>Dumped</b>	Deposit or dispose of (rubbish, waste, or unwanted material), typically in a careless or hurried way

<b>Effluent</b>	Any material in solid, liquid or gaseous form or combination thereof being discharged from industrial activity or any other source and includes a slurry, suspension or vapor
<b>Environmental impact statement (EIS)</b>	A document prepared to analyze the impacts on the environment of a proposed action and released to the public for review and comment. An EIS must meet the requirements of NEPA, CEQ, and the directives of the agency responsible for the proposed action.
<b>Emission</b>	The production and discharge of something, especially gas, or radiation." The effects of lead emission on health"
<b>Evaluated</b>	Estimate the nature, value, quality, ability, extent or significance
<b>Graded</b>	Arranged in a sequence of grades or ranks; "stratified areas of the distribution"
<b>Generation</b>	The production or creation of something
<b>Incinerator</b>	A furnace or a container for burning waste materials
<b>Inadequate</b>	Not capable or competent; lacking
<b>Implementation</b>	The process of putting a decision or plan into effect; execution
<b>Intends</b>	To have in mind as something to be done or brought about, plan to design or mean for a particular purpose, use, recipient, etc.
<b>Landfill site</b>	for the disposal of solid waste in which refuse is buried between layers of dirt to fill in or reclaim low-lying ground
<b>Legislation</b>	Law enacted by a legislative body
<b>Mobilization</b>	To release or make available, as cells or chemical substances
<b>Mitigation</b>	The action of lessening in severity or intensity
<b>Noise</b>	Loud, unpleasant, unexpected, or undesired sound that disrupts or interferes with normal human activities
<b>Potential</b>	Having or showing the capacity to develop into something in the future

*Page*

<b>Pedestrian</b>	A person who goes or travels on foot; walker
<b>Proponent</b>	The person who proposes or intends to undertake a project
<b>Sanitary</b>	Relating to the conditions that affect hygiene and health, especially the supply of sewage facilities and clean drinking water
<b>Segregate</b>	Set apart from the rest or from each other; isolate or divide. "Disabled people should not be segregated from the rest of society"
<b>Settlement</b>	An official agreement intended to resolve a dispute or conflict. "Unions succeeded in reaching a pay settlement"
<b>Ton</b>	A short or net ton is equal to 2,000 pounds; a long or British ton is 2,240 pounds; a metric ton is approximately 2 to 205 pounds
<b>Transportation</b>	The action of transporting someone or something or the process of being transported. "The era of global mass transportation"
<b>Ultimate</b>	Being or happening at the end of a process; final. "Their ultimate aim was to force his resignation"
<b>Violations</b>	the action of violating someone or something
<b>Working place</b>	From the out by side of the last open crosscut to the face
<b>Flora</b>	All the plant life in a particular region or period
<b>Fauna</b>	All the animal life in a particular region or period
<b>Demarcated</b>	Separately clearly, as if by boundaries
<b>Screening</b>	The display of a motion picture
<b>Substitutions</b>	An event in which one thing is substituted
<b>Smelting</b>	extract from its ore by a process involving heating and melting
<b>Regulations</b>	An authorized rule
<b>Recycling</b>	process of converting waste materials into new materials and objects
<b>Stakeholders</b>	A person or organization with an interest or concern in something
<b>Rehabilitation</b>	The conversion of waste land into land suitable for use of habitation or cultivation


## LIST OF ABBREVIATIONS

<b>AA</b>	Ambient Air
<b>APHA</b>	American Public Health Association
<b>AOI</b>	Area Of Influence
<b>BOD<sub>5</sub></b>	Biological Oxygen Demand
<b>CMS</b>	Convention On Migratory Species
<b>COD</b>	Chemical Oxygen Demand
<b>dB(A)</b>	Decibel
<b>EA</b>	Environmental Assessment
<b>EHS</b>	Environmental Health Safety
<b>EIA</b>	Environmental Impact Assessment
<b>EPD</b>	Environmental Protection Department
<b>PEPA</b>	Pakistan Environmental Protection Act
<b>EPA</b>	Environmental Protection Agency
<b>ESIA</b>	Environmental And Social Impact Assessment
<b>ESA</b>	Environmental And Social Assessment
<b>ESMP</b>	Environmental/Social Management Plan
<b>EMP</b>	Environmental Management Plan
<b>EC</b>	Electrical Conductivity
<b>GIS</b>	Geographical Information System
<b>GOP</b>	Government Of Pakistan
<b>GPS</b>	Global Positioning System

<b>GRC</b>	Grievance Redress Committee
<b>GRM</b>	Grievance Redress Mechanism
<b>HSE</b>	Health Safety & Environment
<b>HWMS</b>	Hazardous Waste Management System
<b>EIA</b>	Environmental Impact Assessment
<b>I &amp; D</b>	Irrigation And Drainage
<b>IAIA</b>	International Association for Impact Assessment
<b>IWM</b>	Industrial Waste Management
<b>IUCN</b>	International Union for Conservation of Nature
<b>KM</b>	Kilometers
<b>LGO</b>	Local Government Ordinance
<b>MW</b>	Mega Watt
<b>MEAS</b>	Multilateral Environmental Agreements
<b>MSDS</b>	Material Safety Data Sheets
<b>NEQS</b>	National Environmental Quality Standards
<b>PMD</b>	Pakistan Meteorological Department
<b>PPE</b>	Personal Protective Equipment
<b>PEQS</b>	Punjab Environmental Quality Standards
<b>NEAP</b>	National Environmental Assessment Plan
<b>NWFP</b>	Northwest Frontier Province
<b>Q&amp;EHS</b>	Quality, Environment, Health & Safety
<b>O &amp; M</b>	Operation And Maintenance
<b>PKR</b>	Pak Rupees



<b>PAP</b>	Project Affected People
<b>PEPC</b>	Pakistan Environmental Protection Council/Punjab
<b>PSC</b>	Project Steering Committee
<b>QA/C</b>	Quality Assurance/Quality Control
<b>RAP</b>	Resettlement Action Plan
<b>ROG</b>	Reactive Organic Gas
<b>SWM</b>	Solid Waste Management
<b>TDS</b>	Total Dissolved Solids
<b>UNFC</b>	United Nation Framework Convention on Climate Change
<b>UNCC</b>	United Nation Convention to Combat Desertification
<b>UNEP</b>	United Nations Environmental Programs
<b>GOP</b>	Government Of Pakistan
<b>WHO</b>	World Health Organization
<b>R&amp;R</b>	Rehabilitation And Resettlement
<b>WWTP</b>	Waste Water Treatment Plant

  
 EPA lib...an.epa  
 10.38.160.195  
 18/5/2026 11:44:39 AM

*Page*

### LIST OF INDIVIDUALS AND THEIR FEEDBACK

Sr.#	Name	Concerns
1	Kamran Ali Khan	<p>During the survey in the study area following concerns of the local community were noted:</p> <ul style="list-style-type: none"> <li>• Air pollution should be controlled effectively, such as emissions generated from power-generating activities.</li> <li>• Solid waste should be collected timely and avoid the spreading of waste.</li> <li>• Locals should be preferred for the job opportunities.</li> <li>• Wastewater should be treated prior to final disposal in a nearby drain.</li> <li>• Solid waste should be managed effectively by adopting the standard practices of the area.</li> <li>• The cleanliness of the area should be ensured.</li> <li>• An effective EMMP should be designed and enforced with true spirit.</li> <li>• The health of the workers should be ensured.</li> <li>• Planation should be carried out on an extensive scale.</li> <li>• Construction activity should be carried out during day hours.</li> <li>• Noisy activities should be confined.</li> </ul>
2	Muhammad Waqas	
3	Qaiser Farooq	
4	Ghulam Mujtaba	
5	Mehboob Alam Shahid	
6	Muhammad Latif	
7	Mazhar Hussain	
8	Shahbaz Khan	
9	Waseem Ahmed	
10	Rab Nawaz	
11	Allah Yar	
12	Ahmed Saeed	
13	Muhammad Jabbar	
14	Muhammad Ramzan	
15	Kamran	

*Page*

## SOURCE OF DATA

- Punjab Environmental Protection (Amendment) Act 2012 (PEPA)
- Guidelines for the preparation and review of Environmental Reports, October 1997
- Review of IEE/ EIA Regulation, 2022
- The 2004 Baseline Survey on Millennium Development Goals in AACs, Pakistan
- World Weather Online.com
- Water and Sanitation Agency (WASA), Lahore.
- RED Data Book of IUCN
- Material Safety Data Sheet (MSDS) of chemicals
- [www.wsask.ca/Global/Water%20Programs/Water%20Conservation/SWA](http://www.wsask.ca/Global/Water%20Programs/Water%20Conservation/SWA)
- [Water\\_Efficiency\\_on\\_the\\_Farm\\_Booklet\\_WEB.pdf](#)
- [https://attock.punjab.gov.pk/district\\_profile](https://attock.punjab.gov.pk/district_profile)
- <https://pakistanalmanac.com/punjab-attock/>
- <http://www.madehow.com/Volume-2/Lead.html>
- [http://www.ijirset.com/upload/2013/november/18\\_Disposal.pdf](http://www.ijirset.com/upload/2013/november/18_Disposal.pdf)

EPA librarian.epa  
110.38.160.195  
18/5/2026 11:44:39 AM

**List Of Names, Qualifications and Roles of Team Members Carrying Out the  
IEE/EIA Study**

Sr. #	Name	Qualification
<b>Team Leader</b>		
1.	Miss. Sara Fatima	M.Phil. Environmental Sciences
<b>Environmental Scientist</b>		
2	Dr. Hina Ahmed Malik	Ph.D. Environmental Sciences
3	Mr. Zia Ur Rehman Farooqi	Ph.D. Environmental Sciences (Scholar)
4	Hafiz Zeeshan Safdar	M.Sc. Analytical Chemistry
5	Mr. Saffi Ahmed	M.Phil. Environmental Sciences
<b>Environmental Engineers</b>		
6	Engr. Kanza Fatima	B.Sc. Environmental Engineering
7	Engr. Aleeza Kanwal	B.Sc. Environmental Engineering
8	Hasham Fatima	B.Sc. (Hons) Environmental Sciences
<b>Sociologist</b>		
9	Ahmed Raza	M. Phil Sociology

EPA librarian.epa  
110.38.160.195  
18/5/2026 11:44:39 AM



---

## TERMS OF REFERENCES

Terms of References (Tor) for the Environmental Examination process are designed to ensure compliance with the regulatory framework and facilitate a thorough review of the project's environmental implications. These terms are outlined as follows:

### **1. Review Fee Payment:**

As stipulated in Regulation 7 of the Review of IEE and EIA Regulations, 2022, the proponent is required to submit a nonrefundable review fee to the Environmental Protection Agency (EPA) at the time of submitting the IEE/EIA report. The specific amount of this fee is determined by the rates specified in Schedule III of the regulations.

### **2. Submission of Required Documents:**

The proponent must provide all necessary documents and details essential for the completion of the EIA/IEE report. This includes, but is not limited to, technical studies, environmental impact analyses, mitigation strategies, and any other information pertinent to assessing the project's environmental footprint.

### **3. Financial Responsibility for Fines and Penalties:**

The proponent shall bear full responsibility for any fines or penalties levied by the EPA Punjab or the Environment Tribunal. This includes violations of environmental standards, non-compliance with regulatory requirements, or any other infractions identified during the review or implementation phases of the project.

### **4. Accuracy and Validity of Information:**

The proponent is responsible for ensuring the correctness and validity of all information and documents provided to the consultant for onward submission to EPA Punjab. The consultant facilitating the process will not bear any responsibility for inaccuracies or omissions in the information supplied by the proponent. It is imperative that the proponent conducts thorough due diligence to guarantee that all submitted materials accurately reflect the project's potential environmental impacts and proposed mitigation measures.

These Terms of References are critical to ensuring that the process is conducted in a transparent, accurate, and regulatory-compliant manner. Adherence to these terms will facilitate a comprehensive environmental review of the project, enabling informed decision-making by the EPA Punjab and contributing to the sustainable development and environmental stewardship goals of the region.

In M/s **Suncrop (Pvt.) Limited**



For Enviro Stewards Co. Pvt. Ltd.

EPA librarian.epa  
110.38.160.195  
18/5/2026 11:44:39 AM



EPA librarian.epa  
110.38.160.195  
18/5/2026 11:44:39 AM